

### MLZ1608DR47DT000









Applications	Commercial Grade
Feature	Shield Magnetic Shield
reature	Multilayer  Ferrite Core  Ferrite Core
Series   Type	MLZ
Status	Production
Brand	TDK



	Size	
Length(L)	1.60mm ±0.15mm	
Width(W)	0.80mm ±0.15mm	
Thickness(T)	0.80mm ±0.15mm	
Recommended Land Pattern (A)	0.60mm Nom.	
Recommended Land Pattern (B)	0.80mm Nom.	
Recommended Land Pattern (C)	0.80mm Nom.	

Electrical Characteristics		
Inductance	470nH ±20% at 25MHz	
Rated Current (L Change) [Typ.]		
Rated Current (L Change) [Max.]	400mA (50% Down)	
Rated Current (Temperature Rise) [Typ.]	500mA (20°C Rise)	
Rated Current (Temperature Rise) [Max.]	400mA (20°C Rise)	
DC Resistance [Typ.]	420mΩ	
DC Resistance [Max.]	546mΩ	
Self Resonant Frequency [Min.]		
Self Resonant Frequency [Typ.]		
Q [Min.]		
Q [Typ.]		

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	No	
Packing	Punched (Paper)Taping [180mm Reel]	
Package Quantity	4000pcs	
Whates are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.	0.004g	



#### MLZ1608DR47DT000














## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

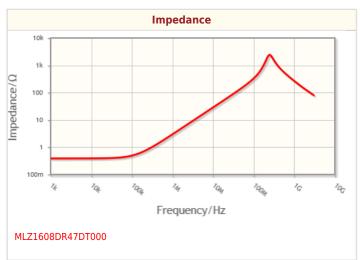

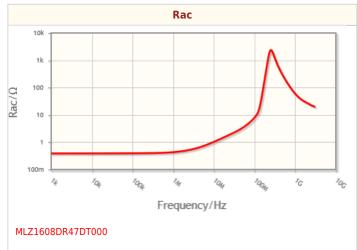

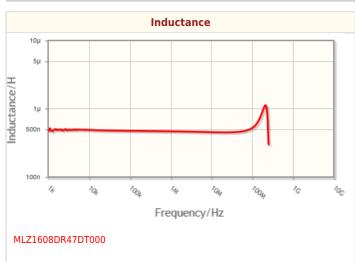

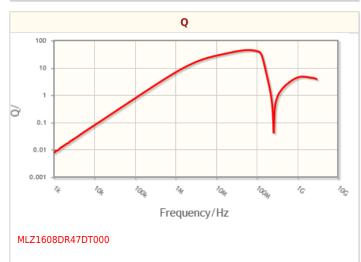

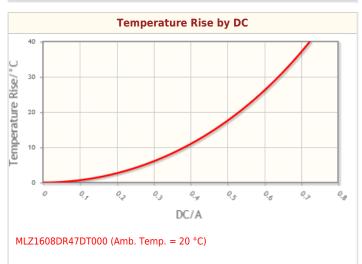

<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.



### MLZ1608DR47DT000










# **Associated Images**



<sup>!</sup> Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.