
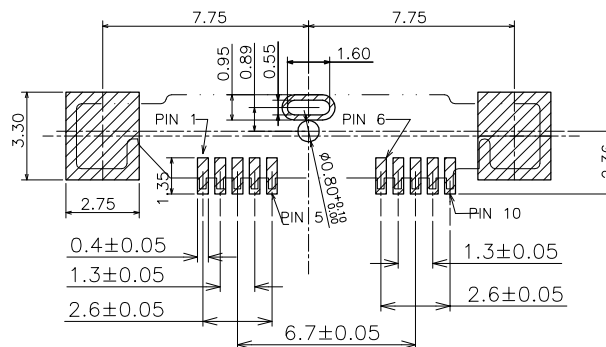





REVISION RECORD		
REV	DESCRIPTION	DRFT

H  
G  
F  
E  
D  
C  
B  
A

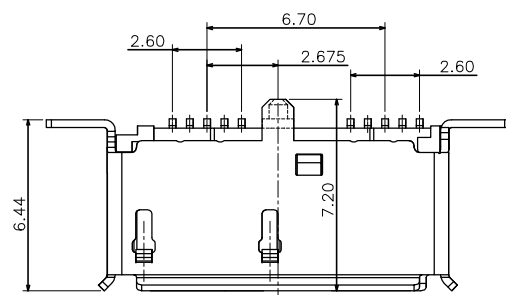


NOTES:

- MACHANICAL CHARACTERISTICS:  
MATING FORCE: 1.30±0.30kgf.  
UNMATING FORCE: 1.30±0.30kgf.  
DURABILITY: 10000 CYCLES
- ELECTRICAL CHARACTERISTICS:  
CURRENT RATING:1.5A  
CONTACT RESISTANCE:30mΩMax.  
DIELECTRICAL WITHSTANDING:100V AC/1min.  
INSULATION RESISTANCE:100MΩ
- MATERIAL:  
PLASTIC:LCP WITH 30% GF,UL 94V-0 ,BLACK.  
TERMINAL:BRASS, T=0.15mm  
TERMINAL PLATING:  
50u" NICKEL UNDERPLATING OVER ALL,  
15u" GOLD PLATING ON THE CONTACT AREA  
100u" TIN PLATING ON THE SOLDER AREA  
SHIELD: STEEL 0.3 THICKNESS.  
SHIELD PLATING: 50~120u" NICKEL PLATING OVER ALL
- OTHERS:  
OPERATION TEMPERATURE: -20°C to +80°C

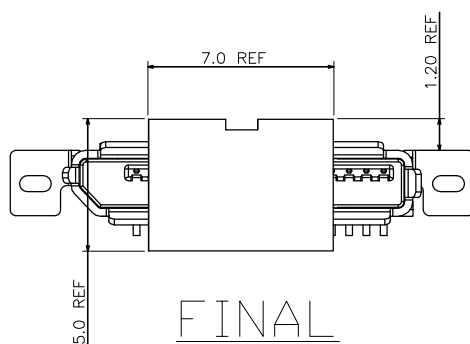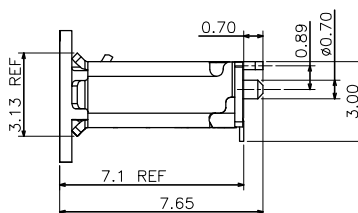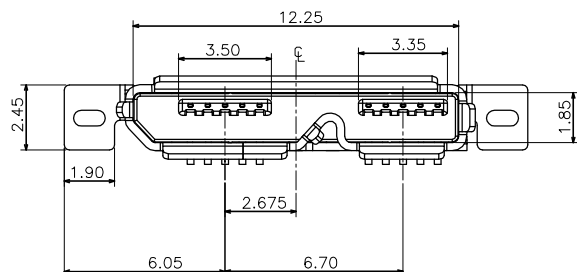

FINAL

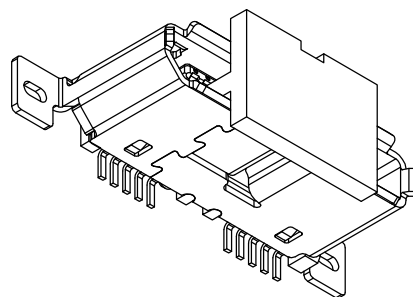

DETACHED LISTS	MM (INCH)	DFTD Roy	DATE 11/20/2012		<b>RoHS Compliant</b>	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE			
	MM	±	APPVL	DATE	TITLE USB 3.0 Micro BF SMD SHORT BODY	
	.0 ± 0.35	±	MATERIAL :			
.0 ± 0.25	±	ANGLES: X*±1° X.X*±0.5°		DRAWING NO. E8110-033-01		
.00 ± 0.15	±	THIRD ANGLE PROJECTION		/PART NO. E8110-033-01		
.000 ± 0.05	±	FINISH :		SIZE A3		
SCALE : 1:1		DO NOT SCALE DRAWING		REV 01		
				SHEET 1 OF 1		

8

7

6

5

4

3

2

1