
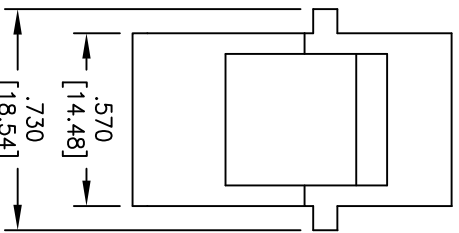

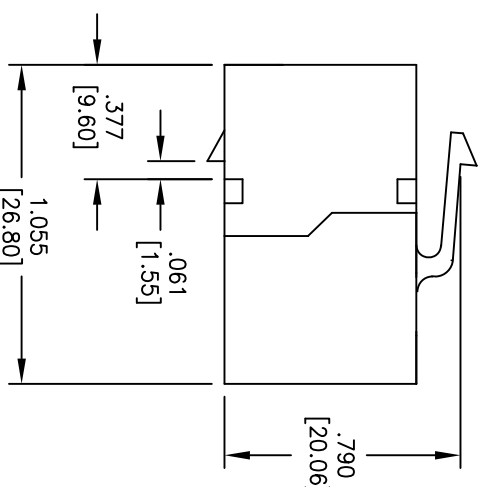
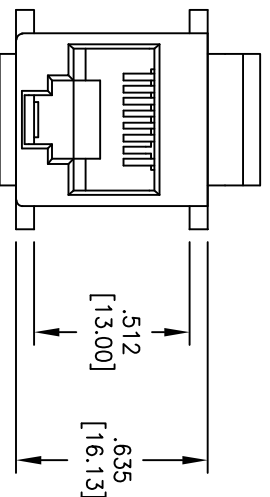


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/15/08	
A		REVISED DIM.	5/14/10	



X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold

SPECIFICATIONS:
Material:
 Insulator: Polycarbonate, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
Plating:
 Gold over Nickel underplate on contact area, Tin over Copper underplate between contact areas (See Chart for Thickness)

Electrical:
 Operating voltage: 150 VAC max.
 Current rating: 1.5 Amps max.
 Contact resistance: 20 mohms max.
 Insulation resistance: 1000 Mohms min. @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:
 Operating temperature: -40°C to +70°C
 Environmental:
 Lead free, RoHS Compliant

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MILLIMETERS
 TOLERANCES: EXCEPT AS NOTED

X ± 2.54
 XX ± .508
 XXX ± .381

APPROVALS		DATE
DRAWN	SS	1/15/08
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 MODULAR TELEPHONE JACK COUPLER
 8P8C, PANEL MOUNT, COLOR BLACK

SIZE	PART NO.	REV.
X	MTJC-88-X-B	A

REF: 300005C SCALE: NTS SHEET 1 OF 1

