

February 1994 Revised March 2001

# 74LCX373

# **Low Voltage Octal Transparent Latch** with 5V Tolerant Inputs and Outputs

#### **General Description**

The LCX373 consists of eight latches with 3-STATE outputs for bus organized system applications. The device is designed for low voltage (3.3V or 2.5V)  $V_{\rm CC}$  applications with capability of interfacing to a 5V signal environment.

The LCX373 is fabricated with an advanced CMOS technology to achieve high speed operation while maintaining CMOS low power dissipation.

#### **Features**

- 5V tolerant inputs and outputs
- 2.3V-3.6V V<sub>CC</sub> specifications provided
- 8.0 ns  $t_{PD}$  max ( $V_{CC} = 3.3V$ ), 10  $\mu$ A  $I_{CC}$  max
- Power-down high impedance inputs and outputs
- Supports live insertion/withdrawal (Note 1)
- $\pm 24$  mA output drive ( $V_{CC} = 3.0V$ )
- Implements patented noise/EMI reduction circuitry
- Latch-up performance exceeds 500 mA
- ESD performance:

Human Body Model > 2000V

Machine Model > 200V


**Note 1:** To ensure the high-impedance state during power up or down,  $\overline{\text{OE}}$  should be tied to  $V_{CC}$  through a pull-up resistor: the minimum value or the resistor is determined by the current-sourcing capability of the driver.

#### **Ordering Code:**


Order Number	Package Number	Package Description		
74LCX373WM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide		
74LCX373SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide		
74LCX373MSA	MSA20	20-Lead Shrink Small Outline Package (SSOP), EIAJ TYPE II, 5.3mm Wide		
74LCX373MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide		

Devices also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

# **Logic Symbols**



#### **Connection Diagram**



# **Pin Descriptions**

Pin Names	Description
D <sub>0</sub> -D <sub>7</sub>	Data Inputs
LE	Latch Enable Input
ŌĒ	Output Enable Input
O <sub>0</sub> -O <sub>7</sub>	3-STATE Latch Outputs

#### **Truth Table**

	Outputs		
LE	ŌĒ	D <sub>n</sub>	O <sub>n</sub>
Х	Н	Х	Z
Н	L	L	L
Н	L	Н	Н
L	L	Х	O <sub>0</sub>


H = HIGH Voltage Level

 $O_0$  = Previous  $O_0$  before HIGH-to-LOW transition of Latch Enable

# **Functional Description**

The LCX373 contains eight D-type latches with 3-STATE standard outputs. When the Latch Enable (LE) input is HIGH, data on the D<sub>n</sub> inputs enters the latches. In this condition the latches are transparent, i.e. a latch output will change state each time its D input changes. When LE is LOW, the latches store the information that was present on the D inputs a setup time preceding the HIGH-to-LOW transition of LE. The 3-STATE standard outputs are controlled by the Output Enable  $(\overline{OE})$  input. When  $\overline{OE}$  is LOW, the standard outputs are in the 2-state mode. When  $\overline{OE}$  is HIGH, the standard outputs are in the high impedance mode but this does not interfere with entering new data into the latches.

# **Logic Diagram**

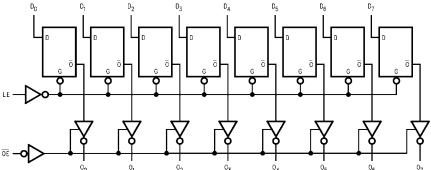

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

L = LOW Voltage Level Z = High Impedance

°C

#### Absolute Maximum Ratings(Note 2) Units Symbol Parameter Value Conditions ٧ -0.5 to +7.0 Supply Voltage $V_{CC}$ ٧ DC Input Voltage -0.5 to +7.0 $V_{I}$ DC Output Voltage Output in 3-STATE Vo -0.5 to +7.0 -0.5 to $V_{CC} + 0.5$ Output in HIGH or LOW State (Note 3) DC Input Diode Current -50 V<sub>I</sub> < GND mΑ $I_{\mathsf{IK}}$ DC Output Diode Current -50 V<sub>O</sub> < GND $I_{OK}$ $\mathsf{m}\mathsf{A}$ +50 $V_O > V_{CC}$ DC Output Source/Sink Current ±50 lο mΑ $I_{CC}$ DC Supply Current per Supply Pin ±100 mΑ DC Ground Current per Ground Pin ±100 mΑ $I_{GND}$

-65 to +150

# **Recommended Operating Conditions** (Note 4)

Symbol	Parameter	Min	Max	Units	
V <sub>CC</sub>	Supply Voltage	Operating	2.0	3.6	V
		Data Retention	1.5	3.6	V V
V <sub>I</sub>	Input Voltage		0	5.5	V
Vo	Output Voltage	HIGH or LOW State	0	V <sub>CC</sub>	V
		3-STATE	0	5.5	v
I <sub>OH</sub> /I <sub>OL</sub>	Output Current	$V_{CC} = 3.0V - 3.6V$		±24	
		$V_{CC} = 2.7V - 3.0V$ $V_{CC} = 2.3V - 2.7V$		±12	mA
		$V_{CC} = 2.3V - 2.7V$		±8	
T <sub>A</sub>	Free-Air Operating Temperature		-40	85	°C
Δt/ΔV	Input Edge Rate, $V_{IN} = 0.8V - 2.0V$ , $V_{CC} = 3.0V$		0	10	ns/V

Note 2: The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the Absolute Maximum Ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 3: I<sub>O</sub> Absolute Maximum Rating must be observed.

Storage Temperature

 $\mathsf{T}_{\mathsf{STG}}$ 

Note 4: Unused inputs must be held HIGH or LOW. They may not float.

# **DC Electrical Characteristics**

Cumbal	Parameter	Conditions	Conditions	$T_A = -40^{\circ}C$	Units	
Symbol		Conditions	(V)	Min	Max	Units
V <sub>IH</sub>	HIGH Level Input Voltage		2.3 – 2.7	1.7		V
			2.7 – 3.6	2.0		v
V <sub>IL</sub>	LOW Level Input Voltage		2.3 – 2.7		0.7	V
			2.7 – 3.6		0.8	v
V <sub>OH</sub>	HIGH Level Output Voltage	$I_{OH} = -100 \mu A$	2.3 – 3.6	V <sub>CC</sub> - 0.2		
		$I_{OH} = -8 \text{ mA}$	2.3	1.8		
		$I_{OH} = -12 \text{ mA}$	2.7	2.2		V
		$I_{OH} = -18 \text{ mA}$	3.0	2.4		
		$I_{OH} = -24 \text{ mA}$	3.0	2.2		
V <sub>OL</sub>	LOW Level Output Voltage	$I_{OL} = 100 \mu A$	2.3 – 3.6		0.2	
		$I_{OL} = 8 \text{ mA}$	2.3		0.6	
		I <sub>OL</sub> = 12 mA	2.7		0.4	V
		I <sub>OL</sub> = 16 mA	3.0		0.4	
		I <sub>OL</sub> = 24 mA	3.0		0.55	
I <sub>I</sub>	Input Leakage Current	$0 \le V_1 \le 5.5V$	2.3 – 3.6		±5.0	μА
I <sub>OZ</sub>	3-STATE Output Leakage	$0 \le V_O \le 5.5V$	2.3 – 3.6		±5.0	
		$V_I = V_{IH}$ or $V_{IL}$	2.3 - 3.0		±3.0	μА
l <sub>OFF</sub>	Power-Off Leakage Current	$V_{1} \text{ or } V_{O} = 5.5 V$	0		10	μΑ

# DC Electrical Characteristics (Continued)

Symbol	Parameter	Conditions	v <sub>cc</sub>	$T_A = -40^\circ$	C to +85°C	Units
Cymbol	rarameter	Conditions	(V)	Min	Max	Onnes
I <sub>CC</sub>	Quiescent Supply Current	$V_I = V_{CC}$ or GND	2.3 – 3.6		10	μА
		$3.6V \le V_I, V_O \le 5.5V \text{ (Note 5)}$	2.3 – 3.6		±10	μΑ
$\Delta I_{CC}$	Increase in I <sub>CC</sub> per Input	$V_{IH} = V_{CC} - 0.6V$	2.3 – 3.6		500	μΑ

Note 5: Outputs disabled or 3-STATE only.

# **AC Electrical Characteristics**

		$T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ , $R_L = 500\Omega$						
Symbol	Parameter	$V_{CC} = 3.3V \pm 0.3V$ $C_L = 50pF$		V <sub>CC</sub> = 2.7V C <sub>L</sub> = 50pF		$V_{CC} = 2.5V \pm 0.2V$ $C_L = 30pF$		Units
Syllibol	Farameter							
		Min	Max	Min	Max	Min	Max	
t <sub>PHL</sub>	Propagation Delay	1.5	8.0	1.5	9.0	1.5	9.6	ns
t <sub>PLH</sub>	D <sub>n</sub> to O <sub>n</sub>	1.5	8.0	1.5	9.0	1.5	9.6	115
t <sub>PHL</sub>	Propagation Delay	1.5	8.5	1.5	9.5	1.5	10.5	ns
t <sub>PLH</sub>	LE to O <sub>n</sub>	1.5	8.5	1.5	9.5	1.5	10.5	115
t <sub>PZL</sub>	Output Enable Time	1.5	8.5	1.5	9.5	1.5	10.5	ns
t <sub>PZH</sub>		1.5	8.5	1.5	9.5	1.5	10.5	115
t <sub>PLZ</sub>	Output Disable Time	1.5	7.5	1.5	8.5	1.5	9.0	ns
t <sub>PHZ</sub>		1.5	7.5	1.5	8.5	1.5	9.0	115
t <sub>S</sub>	Setup Time, D <sub>n</sub> to LE	2.5		2.5		4.0		ns
t <sub>H</sub>	Hold Time, D <sub>n</sub> to LE	1.5		1.5		2.0		ns
t <sub>W</sub>	LE Pulse Width	3.3		3.3		4.0		ns
toshl	Output to Output Skew		1.0					ns
toslh	(Note 6)		1.0					113

Note 6: Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>).

# **Dynamic Switching Characteristics**

Symbol	Parameter	Conditions	v <sub>cc</sub>	T <sub>A</sub> = 25°C	Units
Oyiiiboi	i didilicioi	Conditions	(V)	Typical	Oiiito
V <sub>OLP</sub>	Quiet Output Dynamic Peak V <sub>OL</sub>	$C_L = 50 \text{ pF}, V_{IH} = 3.3V, V_{IL} = 0V$	3.3	0.8	V
		$C_L = 30 pF$ , $V_I = 2.5 V$ , $V_{IL} = 0 V$	2.5	0.6	V
V <sub>OLV</sub>	Quiet Output Dynamic Valley V <sub>OL</sub>	$C_L = 50 \text{ pF}, V_{IH} = 3.3V, V_{IL} = 0V$	3.3	-0.8	
		$C_L = 30pF, V_I = 2.5V, V_{IL} = 0V$	2.5	-0.6	V

# Capacitance

Symbol	Parameter	Conditions	Typical	Units
C <sub>IN</sub>	Input Capacitance	$V_{CC} = Open, V_I = 0V \text{ or } V_{CC}$	7	pF
C <sub>OUT</sub>	Output Capacitance	$V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$	8	pF
C <sub>PD</sub>	Power Dissipation Capacitance	$V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$ , $f = 10$ MHz	25	pF

# AC LOADING and WAVEFORMS Generic for LCX Family






FIGURE 1. AC Test Circuit ( $C_L$  includes probe and jig capacitance)


Test	Switch
t <sub>PLH</sub> , t <sub>PHL</sub>	Open
t <sub>PZL</sub> , t <sub>PLZ</sub>	6V at $V_{CC}$ = 3.3 $\pm$ 0.3V $V_{CC}$ x 2 at $V_{CC}$ = 2.5 $\pm$ 0.2V
t <sub>PZH</sub> ,t <sub>PHZ</sub>	GND




Waveform for Inverting and Non-Inverting Functions




3-STATE Output High Enable and Disable Times for Logic



Propagation Delay. Pulse Width and t<sub>rec</sub> Waveforms



Setup Time, Hold Time and Recovery Time for Logic



3-STATE Output Low Enable and Disable Times for Logic








FIGURE 2. Waveforms (Input Characteristics; f =1MHz,  $t_r = t_f = 3ns$ )

Symbol	V <sub>CC</sub>					
Cymbo.	3.3V ± 0.3V	2.7V	2.5V ± 0.2V			
$V_{mi}$	1.5V	1.5V	V <sub>CC</sub> /2			
$V_{mo}$	1.5V	1.5V	V <sub>CC</sub> /2			
$V_x$	V <sub>OL</sub> + 0.3V	V <sub>OL</sub> + 0.3V	V <sub>OL</sub> + 0.15V			
V <sub>v</sub>	$V_{OH} - 0.3V$	$V_{OH} - 0.3V$	V <sub>OH</sub> – 0.15V			

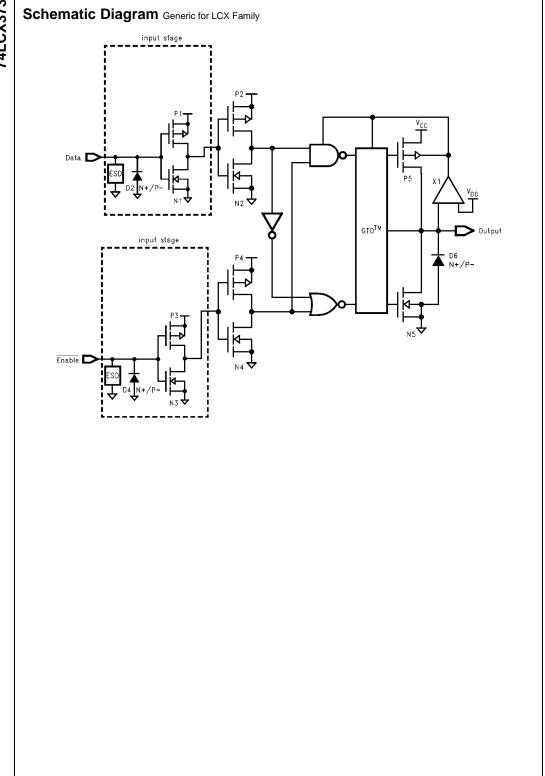


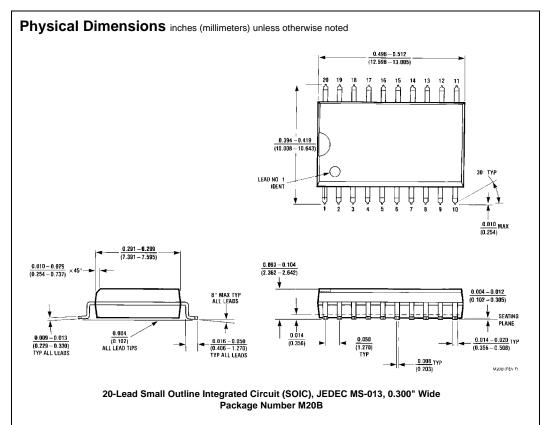

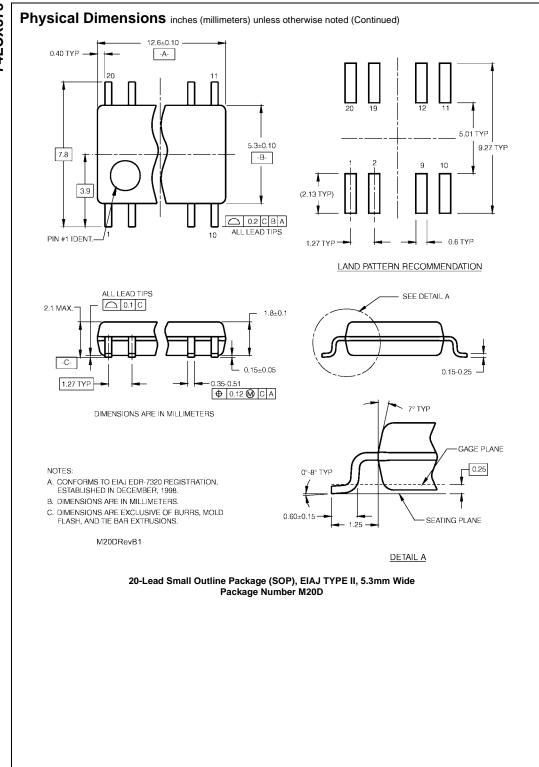

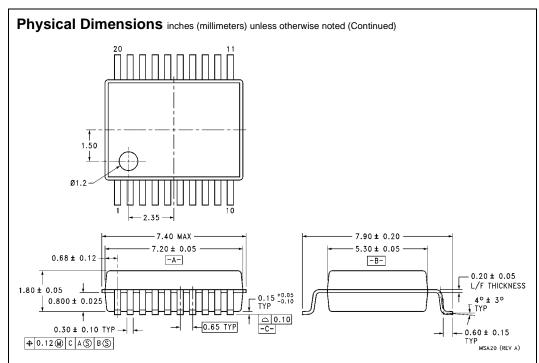

20-Lead Shrink Small Outline Package (SSOP), EIAJ TYPE II, 5.3mm Wide Package Number MSA20

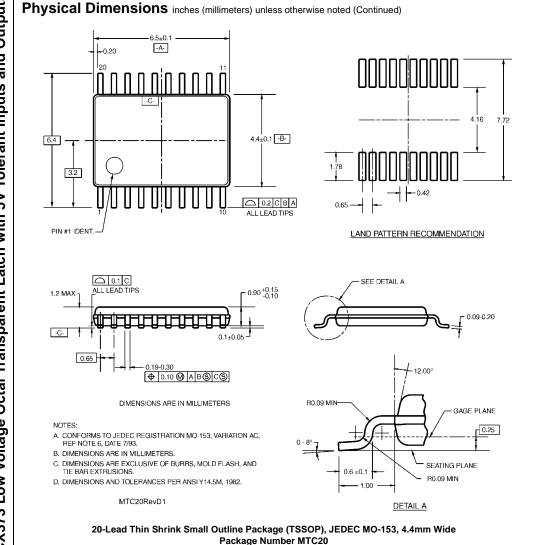

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com