## 2SK3212

Silicon N Channel MOS FET High Speed Power Switching


# HITACHI

ADE-208-762(Z) 1st. Edition Dec. 1, 1998

#### Features

- Low on-resistance
  - $R_{DS} = 0.1\Omega$  typ.
- High speed switching
- 4V gate drive device can be driven from 5V source

#### Outline

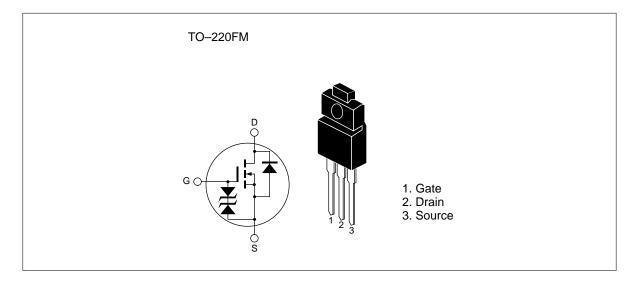

## 2SK3212

## **Absolute Maximum Ratings** (Ta = $25^{\circ}$ C)

Item	Symbol		Unit	
Drain to source voltage	V <sub>DSS</sub>	100	V	
Gate to source voltage	V <sub>GSS</sub>	±20	V	
Drain current	I <sub>D</sub>	10	A	
Drain peak current	Note1	40	А	
Body-drain diode reverse drain current	I <sub>DR</sub>	10	А	
Avalanche current	AP Note3	10	A	
Avalanche energy	E <sub>AR</sub> <sup>Note3</sup>	10	mJ	
Channel dissipation	Pch Note2	20	W	
Channel temperature	Tch	150	°C	
Storage temperature	Tstg	-55 to +150	°C	

Note: 1.  $PW \le 10\mu s$ , duty cycle  $\le 1 \%$ 

2. Value at Tc =  $25^{\circ}C$ 

3. Value at Tch =  $25^{\circ}$ C, Rg  $\geq 50\Omega$ 


### **Electrical Characteristics** (Ta = 25°C)

Item	Symbol	Min	Тур	Max	Unit	Test Conditions
Drain to source breakdown voltage	$V_{(BR)DSS}$	100	_	_	V	$I_{\rm D} = 10 {\rm mA}, V_{\rm GS} = 0$
Gate to source breakdown voltage	V <sub>(BR)GSS</sub>	±20	_		V	$I_{g} = \pm 100 \mu A, V_{DS} = 0$
Gate to source leak current	I <sub>GSS</sub>			±10	μA	$V_{GS} = \pm 16V, V_{DS} = 0$
Zero gate voltage drain current	I <sub>DSS</sub>		_	10	μΑ	$V_{\rm DS} = 100 \ V, \ V_{\rm GS} = 0$
Gate to source cutoff voltage	V <sub>GS(off)</sub>	1.0	_	2.5	V	$I_{\rm D} = 1$ mA, $V_{\rm DS} = 10$ V
Static drain to source on state	R <sub>DS(on)</sub>		0.1	0.13	Ω	$I_D = 5A, V_{GS} = 10V^{Note4}$
resistance	R <sub>DS(on)</sub>		0.13	0.18	Ω	$I_D = 5A, V_{GS} = 4V^{Note4}$
Forward transfer admittance	y <sub>fs</sub>	4.5	7.5		S	$I_{\rm D} = 5A, V_{\rm DS} = 10V^{\rm Note4}$
Input capacitance	Ciss		420		pF	V <sub>DS</sub> = 10V
Output capacitance	Coss		185	_	pF	$V_{GS} = 0$
Reverse transfer capacitance	Crss		100	_	pF	f = 1MHz
Turn-on delay time	t <sub>d(on)</sub>		12		ns	I <sub>D</sub> =5A, V <sub>GS</sub> = 10V
Rise time	t,		60	_	ns	$R_{L} = 10\Omega$
Turn-off delay time	t <sub>d(off)</sub>		105		ns	
Fall time	t <sub>f</sub>	_	70	_	ns	_
Body-drain diode forward voltage	V <sub>DF</sub>	_	0.9	_	V	$I_{\rm F} = 10$ A, $V_{\rm GS} = 0$
Body–drain diode reverse recovery time	t <sub>rr</sub>	_	90		ns	$I_{F} = 10A, V_{GS} = 0$ diF/ dt =50A/µs

Note: 4. Pulse test

## 2SK3212

### Package Dimensions (Unit: mm)

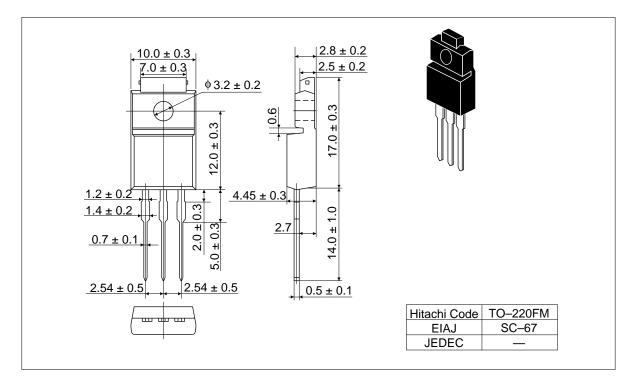

#### Cautions

- 1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
- 2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
- 3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
- 4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
- 5. This product is not designed to be radiation resistant.
- 6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
- Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

## HITACHI

#### Hitachi, Ltd.

Semiconductor & IC Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL NorthAmerica

Asia (Singapore) Asia (Singapore) Asia (Taiwan) Asia (HongKong) Japan

http://www.hitachi-eu.com/hel/ecg http://www.has.hitachi.com.sg/grp3/sicd/index.htm http://www.hitachi.com.tw/E/Product/SICD\_Frame.htm http://www.hitachi.com.hk/eng/bo/grp3/index.htm http://www.hitachi.co.jo/Sicd/indx.htm

http:semiconductor.hitachi.com/

#### For further information write to: Hitachi Semiconductor Hitachi Europe GmbH

Hitachi Semiconductor (America) Inc. 2000 Sierra Point Parkway Brisbane, CA 94005-1897 Tel: <1> (800) 285-1601 Fax: <1> (303) 297-0447

Electronic components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00 Hitachi Europe Ltd. Electronic Components Group. Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 778322 Hitachi Asia Pte. Ltd. 16 Collyer Quay #20-00 Hitachi Tower Singapore 049318 Tel: 535-2100 Fax: 535-1533

Hitachi Asia Ltd. Taipei Branch Office 3F, Hung Kuo Building. No.167, Tun-Hwa North Road, Taipei (105) Tel: <886> (2) 2718-3666 Fax: <886> (2) 2718-8180 Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: <852> (2) 735 9218 Fax: <852> (2) 730 0281 Telex: 40815 HITEC HX

Copyright © Hitachi, Ltd., 1998. All rights reserved. Printed in Japan.