Silicon N-Channel MOS FET Module

HITACHI

Application


High Speed Power Switching

Features

- Equipped with Power MOS FET
- · Low on-resistance
- · High speed switching
- · Low drive current
- Wide area of safe operation
- Inherent parallel diode between source and drain
- · Isolated base from Terminal
- Suitable for motor driver, switching regulator and etc.



Outline

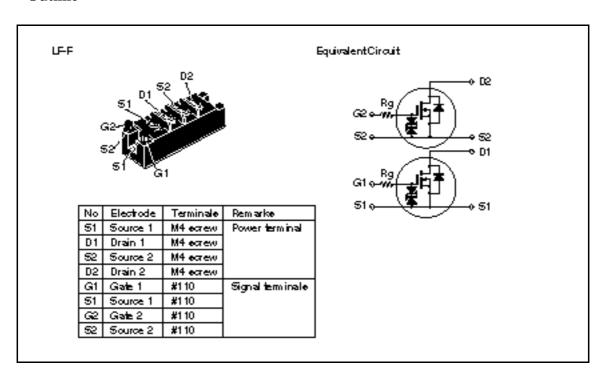

Absolute Maximum Ratings (Ta = 25°C) (Per FET chip)

Item	Symbol	Rating	Unit
Drain source voltage	V _{DSS}	450	V
Gate source voltage	V _{GSS}	±20	V
Drain current	I _D	30	А
Drain peak current	I _{D(peak)}	60	А
Body to drain diode reverse drain current	I _{DR}	30	А
Body to drain diode reverse drain peak current	I _{DR(peak)}	60	А
Channel dissipation	P _D *1	200	W
Channel temperature	Tch	150	°C
Storage temperature	Tstg	-45 to +125	°C
Insulation dielectric	Visol*2	2000	V

Notes: 1. Value at Tc = 25°C

2. Base to terminals AC 1 minute


Electrical Characteristics (Ta = 25°C) (Per FET chip)


Item	Symbol	Min	Тур	Max	Unit	Test conditions
Drain to source breakdown voltage	$V_{(BR)DSS}$	450	_	_	V	$I_D = 10 \text{ mA}, V_{GS} = 0$
Gate to source leak current	I _{GSS}	_	_	±50	μΑ	$V_{GS} = \pm 16 \text{ V}, V_{DS} = 0$
Gate to source breakdown voltage	$V_{(BR)GSS}$	±20	_	_	V	$I_G = \pm 100 \ \mu A, \ V_{DS} = 0$
Zero gate voltage drain current	I _{DSS}	_	_	1	mA	$V_{DS} = 360 \text{ V}, V_{GS} = 0$
Gate to source threshold voltage	$V_{\text{GS(th)}}$	1.5	_	4.0	V	$I_{D} = 1 \text{ mA}, V_{DS} = 10 \text{ V}$
Drain to source saturation voltage	$V_{DS(on)}$	_	2.0	3.0	V	$I_D = 15 \text{ A}, V_{GS} = 10 \text{ V}^{*1}$
Static Drain to source on state resistance	R _{DS(on)}	_	0.13	0.2		$I_D = 15 \text{ A}, V_{GS} = 10 \text{ V}^{*1}$
Forward transfer admittance	y _{fs}	15	25	_	S	$I_D = 15 \text{ A}, V_{DS} = 10 \text{ V}^{*1}$
Input capacitance	Ciss	_	6150	_	pF	$V_{DS} = 10 \text{ V}, V_{GS} = 0$
Output capacitance	Coss	_	2160	_	pF	f = 1 MHz
Reverse transfer capacitance	Crss	_	240	_	pF	_
Turn-on delay time	t _{d(on)}	_	100	_	ns	$I_D = 15 \text{ A}, V_{GS} = 10 \text{ V}$
Rise time	t _r	_	480	_	ns	$R_L = 2$
Turn-off delay time	t _{d(off)}	_	500	_	ns	_
Fall time	t _f	_	400	_	ns	_
Body to drain diode forward voltage	V_{DF}	_	1.2	_	V	$I_F = 15 \text{ A}, V_{GS} = 0$
Body to drain diode reverse recovery time	t _{rr}		200		ns	$I_F = 15 \text{ A}, V_{GS} = 0$ diF/dt = 100 A/ μ s


Note: 1. Pulse Test


Mechanical Characteristics

Item	Symbol	Condition	Rating	Unit
Fixing strength	_	Mounting into main-terminal with M4 screw	10 to 15	kg•cm
	_	Mounting into heat sink with M5 screw	15 to 25	kg•cm
Weight	_	Typical value	220	g

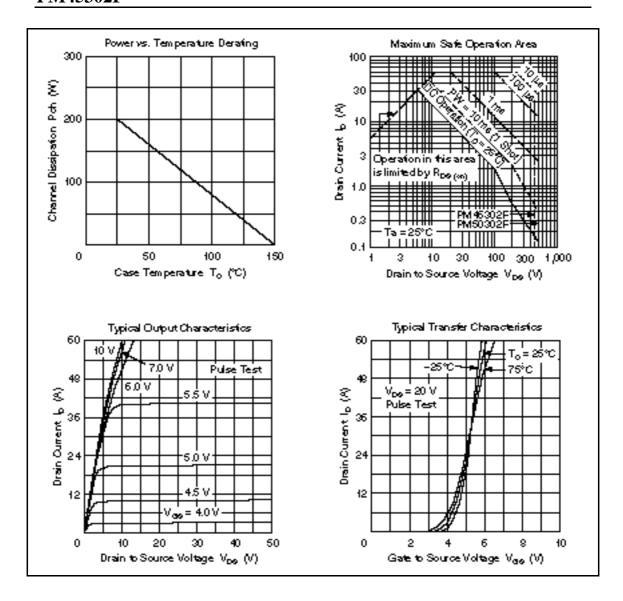

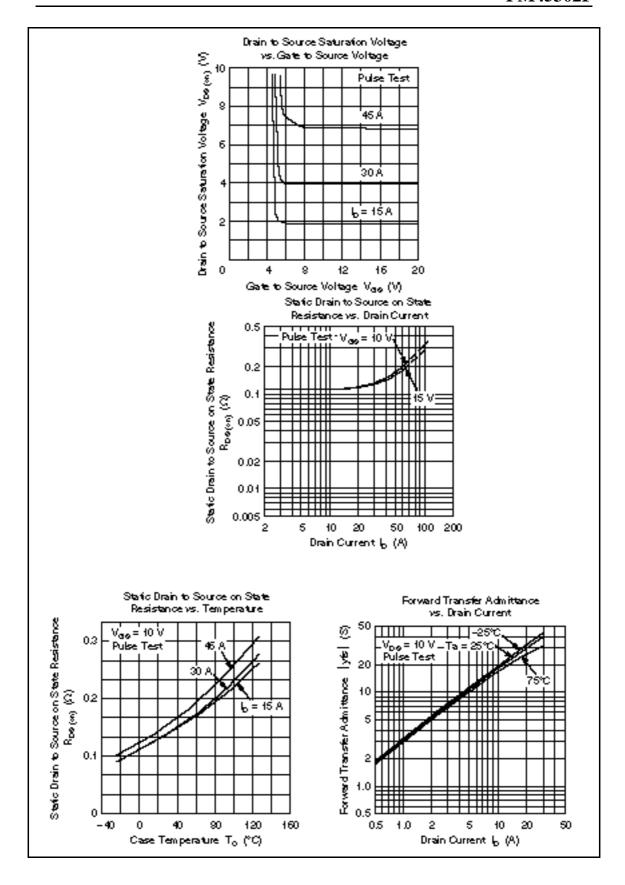

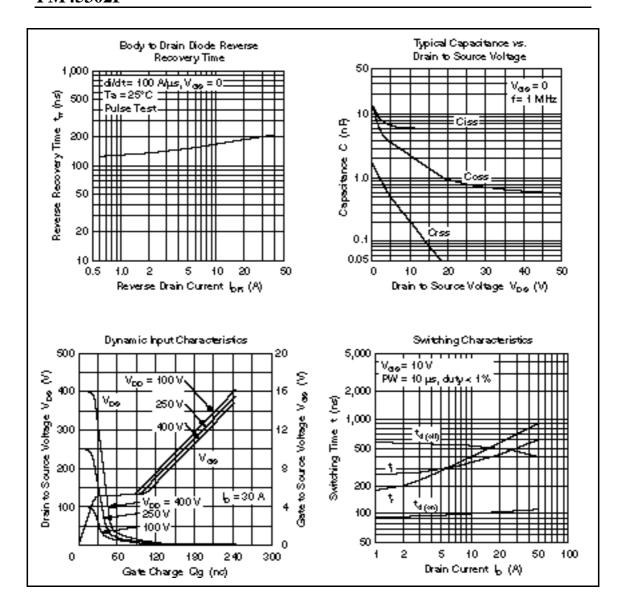

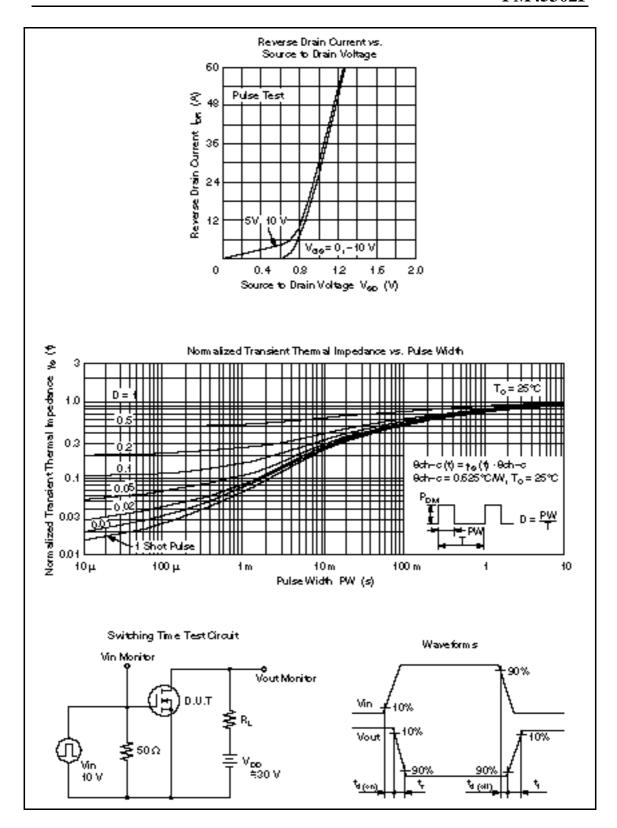

When using this document, keep the following in mind:

- 1. This document may, wholly or partially, be subject to change without notice.
- 2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
- 3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
- 4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
- 5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
- 6. MEDICAL APPLICATIONS: Hitachi's products are not authorized for use in MEDICAL APPLICATIONS without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in MEDICAL APPLICATIONS.

HITACHI

Hitachi, Ltd.
Semiconductor & IC Div.
Nippon Bidg, 25-2, Ohte-medii, Chiyode-ku, Tokyo 100, Jepen Tet Tokyo (03, 3270-2111)
Fex: (03, 3270-5109)

For Author in formellon write to:

Hitechi Americe, Ltd. Semiconductor & IC Div. 2000 Sierre Point Perkwey Briebene, CA. 94005-4835 U.S.A.

Tet +15-589-8300 Fex: +15-583-4207 Hitechi Burope GmbH
Bedronic Componente Group
Cartinertal Burope
Darnecher Streße 3
D-85622 Feldkirchen
München
Tet 089-9 94 80-0
Fex: 089-9 29 30 00

Hitachi Burope Ltd.
Bedronic Componenta Dw.
Northern Burope Headquartera
Whitebrook Park
Lower Cook ham Road
Heidenhead
Barkshire SL68YA
Urited Kingdom
Tet 0628-858000
Fex: 0628-778322

Hitachi Asia Pta, Ltd 45 Collyer Quay \$20-00 Hitachi Tower Snappore 0404 Tet 535-2400 Fex: 535-4533

Hischi Asia (Hong Kong) Ltd. Unit 705, North Towar, World Finance Centra, Harbour City, Centon Road Taim She Taul, Kowloon Hong Kong Tet 27359218 Fax: 27306074