Silicon P Channel Power MOS FET High Speed Power Switching


HITACHI

ADE-208-532 E (Z) 6th. Edition July 1997

Features

- ¥ Low on-resistance
- ¥ Capable of 2.5 V gate drive
- ¥ Low drive current
- ¥ High density mounting

Outline

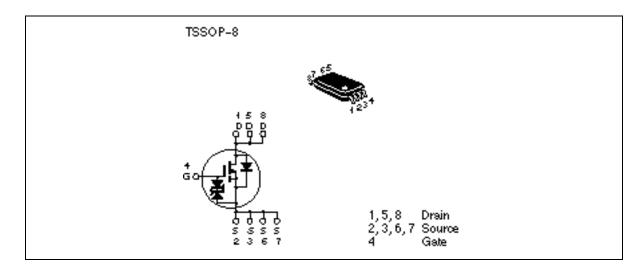



Absolute Maximum Ratings ($Ta = 25^{\circ}C$)

Item	Symbol	Ratings	Unit
Drain to source voltage	V_{DSS}	-20	V
Gate to source voltage	V_{GSS}	±10	V
Drain current	I _D	-3.5	A
Drain peak current	I _{D(pulse)} *1	-28	A
Body to drain diode reverse drain current	I _{DR}	-3.5	A
Channel dissipation	Pch*2	1.3	W
Channel temperature	Tch	150	°C
Storage temperature	Tstg	-55 to +150	°C

Notes: 1. PW \leq 10 μ s, duty cycle \leq 1 %


2. When using the glass epoxy board (FR4 40 x 40 x 1.6 mm), PW^2 10s

Electrical Characteristics (Ta = 25°C)

Symbol	Min	Тур	Max	Unit	Test Conditions
$V_{(BR)DSS}$	-20	_	_	V	$I_D = -10 \text{mA}, V_{GS} = 0$
$V_{(BR)GSS}$	±10	_	_	V	$I_G = \pm 100 \mu A, \ V_{DS} = 0$
I _{GSS}	_	_	±10	μΑ	$V_{GS} = \pm 8V, V_{DS} = 0$
I _{DSS}	_	_	- 1	μΑ	$V_{DS} = -20 \text{ V}, V_{GS} = 0$
$V_{GS(off)}$	-0.4	_	-1.4	V	$V_{DS} = -10V, I_D = -1mA$
e R _{DS(on)}	_	0.046	0.063	Ω	$I_D = -2A$, $V_{GS} = -4V^{*1}$
R _{DS(on)}	_	0.061	0.090	Ω	$I_D = -2A$, $V_{GS} = -2.5V^{*1}$
y _{fs}	5.0	8.0		S	$I_D = -2A$, $V_{DS} = -4V^{*1}$
Ciss	_	970		pF	V _{DS} = -10V
Coss	_	510	_	pF	$V_{GS} = 0$
Crss	_	150	_	pF	f = 1MHz
t _{d(on)}	_	16	_	ns	$V_{GS} = -4V, I_D = -2A$
t _r	_	100	_	ns	$V_{DD} \cong -10V$
t _{d(off)}	_	245	_	ns	
t _f	_	190	_	ns	
V_{DF}	_	-0.81	-1.06	V	$IF = -3.5A, V_{GS} = 0^{*1}$
t _{rr}		65	_	ns	$IF = -3.5A, V_{GS} = 0$ diF/ dt =20A/µs
	V(BR)DSS V(BR)GSS IGSS IDSS VGS(off) E RDS(on) RDS(on) IVfs Ciss Coss Crss td(on) tr td(off) tf VDF	V(BR)DSS -20 V(BR)GSS ±10 IGSS IDSS VGS(off) -0.4 e RDS(on) RDS(on) Iyfs 5.0 Ciss e Crss td(on) tf VDF	V(BR)DSS -20 — V(BR)GSS ±10 — I _{GSS} — — I _{DSS} — — E V _{GS} (off) —0.4 — e R _{DS} (on) — 0.046 R _{DS} (on) — 0.061 lyfs 5.0 8.0 Ciss — 970 Coss — 510 e Crss — 150 t _d (on) — 16 t _r — 100 t _d (off) — 245 t _f — 190 V _{DF} — —	V(BR)DSS -20 — — V(BR)GSS ±10 — — I _{GSS} — — ±10 I _{DSS} — — — E V _{GS} (off) — — — E R _{DS} (on) — 0.046 0.063 R _{DS} (on) — 0.061 0.090 Iyfs 5.0 8.0 — Ciss — 970 — Coss — 510 — e Crss — 150 — e Crss — 150 — t _d (on) — 16 — t _d (off) — 245 — t _f — — — — V _{DF} — — — —	$\begin{array}{cccccccccccccccccccccccccccccccccccc$


Note: 1. Pulse test

Main Characteristics

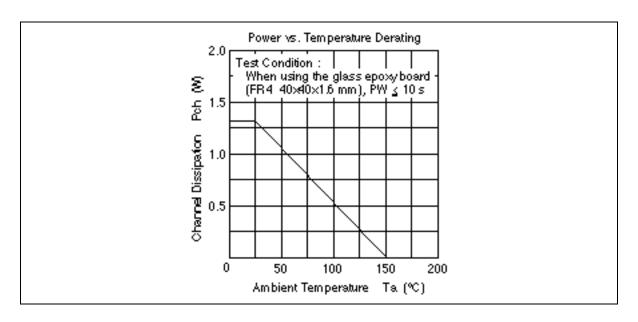

Package Dimensions

Unit: mm

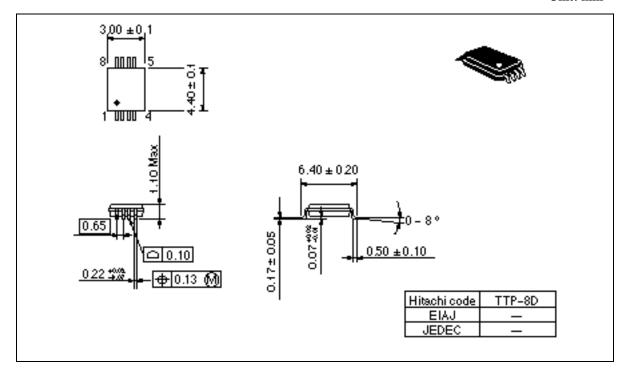

Cautions

- 1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
- 2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
- 3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
- 4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
- 5. This product is not designed to be radiation resistant.
- 6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
- 7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

ITACHI

Semiconductor & IC Div.

Seminorbidos, 25-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

http:semiconductor.hitachi.com/ http://www.hitachi-eu.com/hel/ecg North America

Burope Asia (Singapore) Asia (Taiwan) Asia (HongKong) http://www.has.hitachi.com.sg/grp3/sicd/index.htm http://www.hitachi.com.tw/B/Product/SICD_Frame.htm http://www.hitachi.com.hk/eng/bo/grp3/index.htm http://www.hitachi.co.jp/Sicdfindx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 2000 Stern Point Perlawy Briefen & Ol. 94005 1897 Tel: c15 (800) 285-1601 Fex: c15 (808) 287-0447 Hite chi Europe GmbH Bectronic components Group Domecher Streße S D85922 Feldkirchen, Munich Germany Tel: <40e (80) 9 9 180-0 Fex <40e (80) 9 29 50 00

Histori Europe Ltd. Bectronic C amponente Group. Whitebrook Park Lower Cooldham Road Meidenheed

Maid ennesd Berlahire SL68YM, United Kingdom Tel: c446 (1628) 585000 Fex: c446 (1628) 778322

His chi A de Pite Ltd. 15 Collyer Gray \$20-00 Hitechi Tower Singapor + 040018 Tel: 505-2 100 Fex 535-1533

Historia A de Ltd. 5F, Hung Kuo Beikling, No. 167, Tun-Hve North Roed, Teipei (105) Tel: c885c (2) 2713-3565 Fex: c885c (2) 2718-3585

Hillachi Alei (Hong Kong) Ltd. Group III (Bectronic Componente) 7/F., North Tower, World Finance Centre Tri, Rosen Fores, Maria Francis Centre, Herbour Oby, Ownbon Rosed, Teim She Teui, Kowloon, Hong Kong Tel: (2825) (2) 735 92 18 Fex (2825) (2) 730 0381 Telec 408 15 HITECHX

Copyright @Hitachi, Ltd., 1928. All rights reserved. Printed in Japan.