LA100P Semiconductor Fuses

1000 VAC ■ Very Fast-Acting ■ 15 - 1000 Amperes







Littelfuse's LA100P semiconductor protection fuses are rated 1000V, extending the range of protection for UPS systems, AC and DC drives, reduced voltage motor starters and similar applications where lower I²t and superior reliability are needed. With ratings from 15-1000 amperes, a wide range of high voltage applications can be served.

FEATURES

- Low I²t minimizes damage to protected components on short circuit.
- Controlled arc voltage reduces stress to circuit components during fuse clearing.

APPLICATIONS

Protection of UPS systems, AC/DC drives, reduced voltage motor starters and other 1000V or less semiconductor devices.

SPECIFICATIONS


Voltage Rating: AC: 1000 Volts

DC: 750 Volts

Interrupting Rating: 100,000 Amperes
Ampere Range: 15 – 1000 Amperes

Approvals: UL Recognized under the components

program.

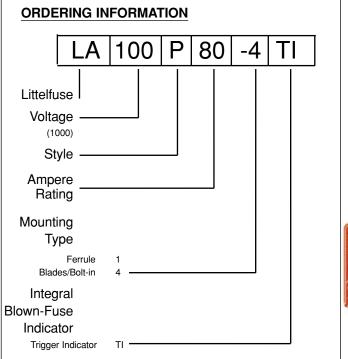



Note: Mounting types and integral blown fuse indicators are optional for specified ratings.

LA100P Semiconductor Fuses


1000 VAC ■ Very Fast-Acting ■ 15 – 1000 Amperes




Catalog Numbers & Technical Data


| Ampere Rating | Littelfuse Catalog Number | Catalog Type Clearing I | | Watts Loss @ Rated Current (W) | | |
|------------------|---------------------------------|-------------------------|-----|--------------------------------------|--|--|
| 15 | LA100P15-1 | 1 | 0.6 | 3.4 | | |
| 20 | LA100P20-1 | 1 | 0.8 | 5.9 | | |
| 25 | LA100P25-1 | 1 | 1,3 | 9 | | |
| 30 | LA100P30-1 | 1 | 1.5 | 12.8 | | |
| 35 | LA100P35-4 | 4 | 2.2 | 7.3 | | |
| 40 | LA100P40-4 | 4 | 2.9 | 8.3 | | |
| 50 | LA100P50-4 | 4 | 4.5 | 11 | | |
| 50 | LA100QP50-4TI | 4TI | 4.5 | 11 | | |
| 60 | LA100P60-4 | 4 | 6.5 | 13 | | |
| 60 | LA100P60-4TI | 4TI | 6.5 | 13 | | |
| 70 | LA100P70-4TI | 4TI | 8.8 | 13 | | |
| 80 | LA100P80-4 | 4 | 12 | 14 | | |
| 80 | LA100P80-4TI | 4TI | 12 | 14 | | |
| 100 | LA100P100-4 | 4 | 18 | 18 | | |
| 100 | LA100P100-4TI | 4TI | 18 | 18 | | |
| 125 | LA100P125-4 | 4 | 28 | 23 | | |
| 125 | LA100P125-4TI | 4TI | 28 | 23 | | |
| 150 | LA100P150-4 | 4 | 41 | 28 | | |
| 150 | LA100P150-4TI | 4TI | 41 | 28 | | |


| Ampere Rating | Littelfuse Catalog Number | Mounting Type | Maximum Clearing I ² t @1000 VAC (A ² S x 10 ³) | Watts Loss @ Rated Current (W) | | |
|------------------|---------------------------------|------------------|--|--------------------------------------|--|--|
| 200 | LA100P200-4 | 4 | 72 | 36 | | |
| 200 | LA100P200-4TI | 4TI | 72 | 36 | | |
| 225 | LA100P225-4 | 4 | 91 | 40 | | |
| 250 | LA100P250-4 | 4 | 110 | 46 | | |
| 300 | LA100P300-4 | 4 | 160 | 55 | | |
| 300 | LA100P300-4TI | 4TI | 160 | 55 | | |
| 350 | LA100P350-4 | 4 | 220 | 65 | | |
| 350 | LA100P350-4TI | 4TI | 220 | 65 | | |
| 400 | LA100P400-4 | 4 | 290 | 70 | | |
| 400 | LA100P400-4TI | 4TI | 290 | 70 | | |
| 500 | LA100P500-4 | 4 | 450 | 90 | | |
| 500 | LA100P500-4TI | 4TI | 450 | 90 | | |
| 600 | LA100P600-4 | 4 | 650 | 110 | | |
| 600 | LA100P600-4TI | 4TI | 650 | 110 | | |
| 650 | LA100P650-4 | 4 | 780 | 120 | | |
| 700 | LA100P700-4 | 4 | 880 | 125 | | |
| 800 | LA100P800-4 | 4 | 1200 | 140 | | |
| 800 | LA100P800-4TI | 4TI | 1200 | 140 | | |
| 1000 | LA100P1000-4 | 4 | 1900 | 190 | | |














| DIMENSIONS Dimensions for reference only. | | | | | | | | | | | |
|--|----------------|------|--|----------------|----------------|---------------|---------------|----------------|----------------|----------------|--------------------------|
| AMPERES | MOUNT. TYPE | FIG. | DIMENSIONS IN INCHES (mm in parentheses) | | | | | | | | |
| | | NO. | Α | В | С | D | E | F | G | Н | J |
| 15 – 30 | 1 | 1 | 2.53 (66.8) | 0.56 (14.2) | | - | - | | - | - | - |
| 35 – 60 | 4, 4TI | 2 | 5.00 (127) | 1.00 (25.4) | 3.50 (173) | 4.31 (109) | 4.19 (106) | 0.31 (7.9) | 0.75 (19.1) | 0.13 (3.3) | - |
| 65 – 100 | 4, 4TI | 2 | 5.00 (127) | 1.22 (31) | 3.50 (173) | 4.31 (109) | 4.19 (106) | 0.31 (7.9) | 1.00 (25.4) | 0.19 (4.8) | - |
| 125 – 200 | 4, 4TI | 2 | 5.72 (145) | 2.00 (38.1) | 3.47 (88.1) | 4.78 (121) | 4.16 (106) | 0.41 (10.4) | 1.00 (25.4) | 0.25 (6.4) | - |
| 225 – 400 | 4, 4TI | 2 | 5.72 (145) | 2.00 (50.8) | 3.47 (88.1) | 4.78 (121) | 4.16 (106) | 0.41 (10.4) | 1.50 (25.4) | 0.25 (6.4) | - |
| 500 – 600 | 4, 4TI | 2 | 7.72 (196) | 2.50 (63.5) | 3.47 (88.1) | 5.88 (149) | 5.56 (147) | 0.53 (13.5) | 2.00 (50.8) | 0.38 (9.7) | - |
| 650 - 800 | 4, 4TI | 3 | 7.44 (189) | 2.88 (73.2) | 3.94 (100) | 5.94 (151) | - | 0.63 (16) | 2.00 (50.8) | 0.38 (9.7) | 0.3 ⁻ (7.9 |
| 1000 | 4 | 4 | 8.22 (209) | 3.50 (88.9) | 4.47 (114) | 6.59 (167) | 5.84 (148) | 0.63 (16) | 2.75 (69.9) | 0.50 (12.7) | 1.38 |

Contact Littelfuse for characteristic curves.

