Features

- · Low-voltage and Standard-voltage Operation
 - $2.7 (V_{CC} = 2.7V \text{ to } 5.5V)$
 - $1.8 (V_{CC} = 1.8V \text{ to } 5.5V)$
- · User-selectable Internal Organization
 - 2K: 256 x 8 or 128 x 16
 - 4K: 512 x 8 or 256 x 16
- Three-wire Serial Interface
- Seguential Read Operation
- 2 MHz Clock Rate (5V)
- Self-timed Write Cycle (10 ms Max)
- High Reliability
 - Endurance: 1 Million Write Cycles
 - Data Retention: 100 Years
- Automotive Devices Available
- 8-lead JEDEC PDIP, 8-lead JEDEC SOIC, 8-lead EIAJ SOIC, 8-lead Ultra Thin mini-MAP (MLP 2x3), 8-lead TSSOP and 8-ball dBGA2 Packages

Description


The AT93C56A/66A provides 2048/4096 bits of serial electrically erasable programmable read-only memory (EEPROM) organized as 128/256 words of 16 bits each (when the ORG pin is connected to VCC) and 256/512 words of 8 bits each (when the ORG pin is tied to ground). The device is optimized for use in many industrial and commercial applications where low-power and low-voltage operations are essential. The AT93C56A/66A is available in space-saving 8-lead PDIP, 8-lead JEDEC SOIC, 8-lead EIAJ SOIC, 8-lead Ultra Thin mini-MAP (MLP 2x3), 8-lead TSSOP, and 8-ball dBGA2 packages.

The AT93C56A/66A is enabled through the Chip Select pin (CS) and accessed via a three-wire serial interface consisting of Data Input (DI), Data Output (DO), and Shift Clock (SK). Upon receiving a read instruction at DI, the address is decoded and the data is clocked out serially on the data output pin DO. The write cycle is completely self-timed and no separate erase cycle is required before write. The write cycle is only enabled when the part is in the Erase/Write Enable State. When CS is brought "high" following the initiation of a write cycle, the DO pin outputs the Ready/Busy status of the part.

The AT93C56A/66A is available in 2.7V to 5.5V and 1.8V to 5.5V versions.

Table 1. Pin Configurations

| Pin Name | Function |
|----------|-----------------------|
| CS | Chip Select |
| SK | Serial Data Clock |
| DI | Serial Data Input |
| DO | Serial Data Output |
| GND | Ground |
| VCC | Power Supply |
| ORG | Internal Organization |
| NC | No Connect |





Three-wire Serial EEPROM

2K (256 x 8 or 128 x 16)

4K (512 x 8 or 256 x 16)

AT93C56A AT93C66A

3378K-SEEPR-12/06






Absolute Maximum Ratings*

| Operating Temperature55°C to +125°C |
|--|
| Storage Temperature65°C to +150°C |
| Voltage on Any Pin with Respect to Ground1.0V to +7.0V |
| Maximum Operating Voltage 6.25V |
| DC Output Current |

*NOTICE:

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability

Figure 1. Block Diagram

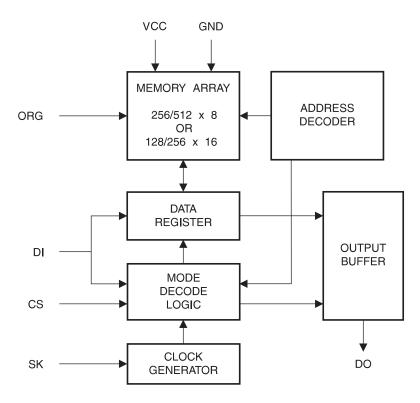

Note: When the ORG pin is connected to VCC, the x 16 organization is selected. When it is connected to ground, the x 8 organization is selected. If the ORG pin is left unconnected and the application does not load the input beyond the capability of the internal 1 Meg ohm pullup, then the x 16 organization is selected.

Table 2. Pin Capacitance⁽¹⁾

Applicable over recommended operating range from $T_A = 25^{\circ}C$, f = 1.0 MHz, $V_{CC} = +5.0$ V (unless otherwise noted)

| Symbol | nbol Test Conditions | | Units | Conditions |
|------------------|--------------------------------|---|-------|-----------------------|
| C _{OUT} | Output Capacitance (DO) | 5 | pF | V _{OUT} = 0V |
| C _{IN} | Input Capacitance (CS, SK, DI) | 5 | pF | V _{IN} = 0V |

Note: 1. This parameter is characterized and is not 100% tested.

Table 3. DC Characteristics

Applicable over recommended operating range from: T_{AI} = -40°C to +85°C, V_{CC} = +1.8V to +5.5V, V_{CC} = +1.8V to +5.5V (unless otherwise noted)

| Symbol | Parameter | Test Condition | | Min | Тур | Max | Unit |
|--|---|---|---------------------------|-------------------------------|-----|--|------|
| V _{CC1} | Supply Voltage | | | 1.8 | | 5.5 | V |
| V _{CC2} | Supply Voltage | | | 2.7 | | 5.5 | V |
| V _{CC3} | Supply Voltage | | | 4.5 | | 5.5 | V |
| | O O | | READ at 1.0 MHz | | 0.5 | 2.0 | mA |
| I _{CC} | Supply Current | V _{CC} = 5.0V | WRITE at 1.0 MHz | | 0.5 | 2.0 | mA |
| I _{SB1} | Standby Current | V _{CC} = 1.8V | CS = 0V | | 0 | 0.1 | μA |
| I _{SB2} | Standby Current | V _{CC} = 2.7V | CS = 0V | | 6.0 | 10.0 | μΑ |
| I _{SB3} | Standby Current | V _{CC} = 5.0V | CS = 0V | | 17 | 30 | μA |
| I _{IL} | Input Leakage | V _{IN} = 0V to V _{CC} | | | 0.1 | 3.0 | μΑ |
| I _{OL} | Output Leakage | V _{IN} = 0V to V _{CC} | | | 0.1 | 3.0 | μΑ |
| V _{IL1} ⁽¹⁾ V _{IH1} ⁽¹⁾ | Input Low Voltage Input High Voltage | $2.7V \le V_{CC} \le 5.5V$ | | -0.6 2.0 | | 0.8 V _{CC} + 1 | V |
| V _{IL2} ⁽¹⁾ V _{IH2} ⁽¹⁾ | Input Low Voltage Input High Voltage | $1.8V \le V_{CC} \le 2.7V$ | | -0.6 V _{CC} x 0.7 | | V _{CC} x 0.3 V _{CC} + 1 | V |
| V _{OL1} | Output Low Voltage | 0.7)/ ()/ (5.5)/ | I _{OL} = 2.1 mA | | | 0.4 | V |
| V _{OH1} | Output High Voltage | $2.7V \le V_{CC} \le 5.5V$ | I _{OH} = -0.4 mA | 2.4 | | | V |
| V _{OL2} | Output Low Voltage | 4.01/ 21/ 20.71/ | I _{OL} = 0.15 mA | | | 0.2 | V |
| V _{OH2} | Output High Voltage | $1.8V \le V_{CC} \le 2.7V$ | I _{OH} = -100 μA | V _{CC} - 0.2 | | | V |

Note: 1. V_{IL} min and V_{IH} max are reference only and are not tested.





Table 4. AC Characteristics

Applicable over recommended operating range from T_{Al} = -40° C to + 85°C, V_{CC} = As Specified, CL = 1 TTL Gate and 100 pF (unless otherwise noted)

| Symbol | Parameter | Test Condition | | Min | Тур | Max | Units |
|--------------------------|----------------------------|--|--|-------------|-----|----------------|--------------|
| f_{SK} | SK Clock Frequency | $ 4.5 \text{V} \le \text{V}_{\text{CC}} \le 5.5 \text{V} \\ 2.7 \text{V} \le \text{V}_{\text{CC}} \le 5.5 \text{V} \\ 1.8 \text{V} \le \text{V}_{\text{CC}} \le 5.5 \text{V} $ | | 0 0 0 | | 2 1 0.25 | MHz |
| t _{SKH} | SK High Time | $ \begin{array}{c} 2.7 \text{V} \leq \text{V}_{\text{CC}} \; \leq 5.5 \text{V} \\ 1.8 \text{V} \leq \text{V}_{\text{CC}} \; \leq 5.5 \text{V} \end{array} $ | | 250 1000 | | | ns |
| t _{SKL} | SK Low Time | $ \begin{array}{c} 2.7 \text{V} \leq \text{V}_{\text{CC}} \; \leq 5.5 \text{V} \\ 1.8 \text{V} \leq \text{V}_{\text{CC}} \; \leq 5.5 \text{V} \end{array} $ | | 250 1000 | | | ns |
| t _{CS} | Minimum CS Low Time | $2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$ | | 250 1000 | | | ns |
| t _{CSS} | CS Setup Time | Relative to SK | $2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$ | 50 200 | | | ns |
| t _{DIS} | DI Setup Time | Relative to SK | $2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$ | 100 400 | | | ns |
| t _{CSH} | CS Hold Time | Relative to SK | | 0 | | | ns |
| t _{DIH} | DI Hold Time | Relative to SK | $2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$ | 100 400 | | | ns |
| t _{PD1} | Output Delay to "1" | AC Test | $2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$ | | | 250 1000 | ns |
| t _{PD0} | Output Delay to "0" | AC Test | $2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$ | | | 250 1000 | ns |
| t _{sv} | CS to Status Valid | AC Test | $2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$ | | | 250 1000 | ns |
| t _{DF} | CS to DO in High Impedance | AC Test CS = V _{IL} | $2.7V \le V_{CC} \le 5.5V$ $1.8V \le V_{CC} \le 5.5V$ | | | 150 400 | ns |
| t _{WP} | Write Cycle Time | | $1.8V \le V_{CC} \le 5.5V$ | 0.1 | 3 | 10 | ms |
| Endurance ⁽¹⁾ | 5.0V, 25°C | | 1 | 1M | | | Write Cycles |

Note: 1. This parameter is characterized and is not 100% tested.

Table 5. Instruction Set for the AT93C56A and AT93C66A

| | | Ор | Addre | ess | Data | | |
|-------------|----|------|-------------|-------------|---------------------------------|----------------------------------|---|
| Instruction | SB | Code | x 8 | x 16 | x 8 | x 16 | Comments |
| READ | 1 | 10 | $A_8 - A_0$ | $A_7 - A_0$ | | | Reads data stored in memory, at specified address. |
| EWEN | 1 | 00 | 11XXXXXXX | 11XXXXXX | | | Write enable must precede all programming modes. |
| ERASE | 1 | 11 | $A_8 - A_0$ | $A_7 - A_0$ | | | Erases memory location $A_n - A_0$. |
| WRITE | 1 | 01 | $A_8 - A_0$ | $A_7 - A_0$ | $D_7 - D_0$ | D ₁₅ – D ₀ | Writes memory location $A_n - A_0$. |
| ERAL | 1 | 00 | 10XXXXXXX | 10XXXXXX | | | Erases all memory locations. Valid only at V_{CC} = 4.5V to 5.5V. |
| WRAL | 1 | 00 | 01XXXXXXX | 01XXXXXX | D ₇ – D ₀ | D ₁₅ – D ₀ | Writes all memory locations. Valid only at $V_{\rm CC}$ = 5.0V ±10% and Disable Register cleared. |
| EWDS | 1 | 00 | 00XXXXXXX | 00XXXXXX | | | Disables all programming instructions. |

Note: The X's in the address field represent don't care values and must be clocked.

Functional Description

The AT93C56A/66A is accessed via a simple and versatile three-wire serial communication interface. Device operation is controlled by seven instructions issued by the host processor. A valid instruction starts with a rising edge of CS and consists of a Start Bit (logic "1") followed by the appropriate Op Code and the desired memory address location.

READ (**READ**): The Read (READ) instruction contains the address code for the memory location to be read. After the instruction and address are decoded, data from the selected memory location is available at the serial output pin DO. Output data changes are synchronized with the rising edges of serial clock SK. It should be noted that a dummy bit (logic "0") precedes the 8- or 16-bit data output string. The AT93C56A/66A supports sequential read operations. The device will automatically increment the internal address pointer and clock out the next memory location as long as Chip Select (CS) is held high. In this case, the dummy bit (logic "0") will not be clocked out between memory locations, thus allowing for a continuous stream of data to be read.

ERASE/WRITE (EWEN): To assure data integrity, the part automatically goes into the Erase/Write Disable (EWDS) state when power is first applied. An Erase/Write Enable (EWEN) instruction must be executed first before any programming instructions can be carried out. Please note that once in the EWEN state, programming remains enabled until an EWDS instruction is executed or $V_{\rm CC}$ power is removed from the part.

ERASE (ERASE): The Erase instruction programs all bits in the specified memory location to the logical "1" state. The self-timed erase cycle starts once the ERASE instruction and address are decoded. The DO pin outputs the Ready/Busy status of the part if CS is brought high after being kept low for a minimum of 250 ns (t_{CS}). A logic "1" at pin DO indicates that the selected memory location has been erased, and the part is ready for another instruction.





WRITE (WRITE): The Write (WRITE) instruction contains the 8 or 16 bits of data to be written into the specified memory location. The self-timed programming cycle t_{WP} starts after the last bit of data is received at serial data input pin DI. The DO pin outputs the Ready/Busy status of the part if CS is brought high after being kept low for a minimum of 250 ns (t_{CS}). A logic "0" at DO indicates that programming is still in progress. A logic "1" indicates that the memory location at the specified address has been written with the data pattern contained in the instruction and the part is ready for further instructions. A READY/BUSY status cannot be obtained if the CS is brought high after the end of the self-timed programming cycle t_{WP} .


ERASE ALL (ERAL): The Erase All (ERAL) instruction programs every bit in the memory array to the logic "1" state and is primarily used for testing purposes. The DO pin outputs the Ready/Busy status of the part if CS is brought high after being kept low for a minimum of 250 ns (t_{CS}). The ERAL instruction is valid only at V_{CC} = 5.0V \pm 10%.

WRITE ALL (WRAL): The Write All (WRAL) instruction programs all memory locations with the data patterns specified in the instruction. The DO pin outputs the Ready/Busy status of the part if CS is brought high after being kept low for a minimum of 250 ns (t_{CS}). The WRAL instruction is valid only at V_{CC} = 5.0V ± 10%.

ERASE/WRITE DISABLE (EWDS): To protect against accidental data disturb, the Erase/Write Disable (EWDS) instruction disables all programming modes and should be executed after all programming operations. The operation of the READ instruction is independent of both the EWEN and EWDS instructions and can be executed at any time.

Timing Diagrams

Figure 2. Synchronous Data Timing

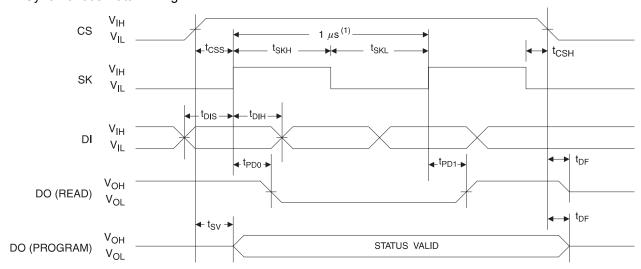

Note: 1. This is the minimum SK period.

Table 6. Organization Key for Timing Diagrams

| | AT93C56A (2K) | | AT93C6 | 66A (4K) |
|----------------|-------------------------------|-------------------------------|----------------|-----------------|
| I/O | x 8 | x 16 | x 8 | x 16 |
| A _N | A ₈ ⁽¹⁾ | A ₇ ⁽²⁾ | A ₈ | A ₇ |
| D _N | D ₇ | D ₁₅ | D ₇ | D ₁₅ |

 A₈ is a DON'T CARE value, but the extra clock is required.
 A₇ is a DON'T CARE value, but the extra clock is required. Notes:

Figure 3. READ Timing

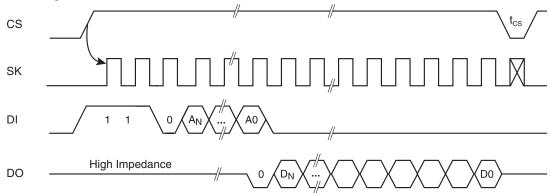


Figure 4. EWEN Timing

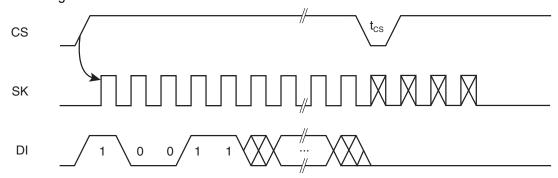


Figure 5. EWDS Timing

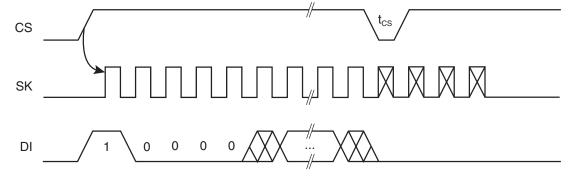




Figure 6. WRITE Timing


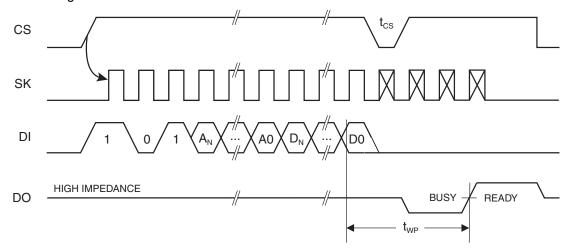


Figure 7. WRAL Timing⁽¹⁾

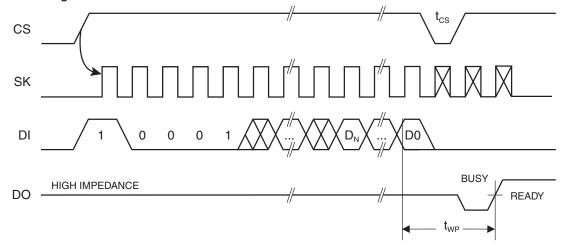

Note: 1. Valid only at $V_{CC} = 4.5V$ to 5.5V.

Figure 8. ERASE Timing


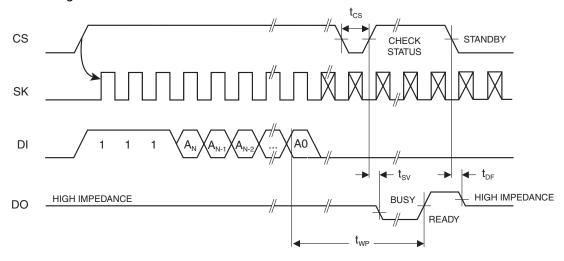


Figure 9. ERAL Timing⁽¹⁾



Note: 1. Valid only at $V_{CC} = 4.5V$ to 5.5V.



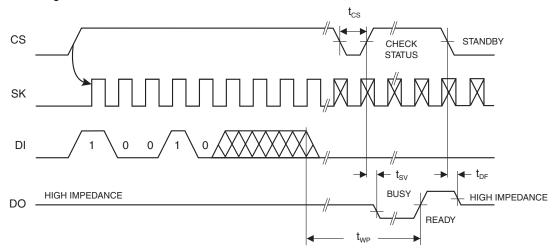

AT93C56A Ordering Information⁽¹⁾

| Ordering Code | Package | Operation Range |
|---|-----------|---|
| AT93C56A-10PU-2.7 ⁽²⁾ | 8P3 | |
| AT93C56A-10PU-1.8 ⁽²⁾ | 8P3 | |
| AT93C56A-10SU-2.7 ⁽²⁾ | 8S1 | |
| AT93C56A-10SU-1.8 ⁽²⁾ | 8S1 | |
| AT93C56AW-10SU-2.7 ⁽²⁾ | 8S2 | Lead-free/Halogen-free/ |
| AT93C56AW-10SU-1.8 ⁽²⁾ | 8S2 | Industrial Temperature |
| AT93C56A-10TU-2.7 ⁽²⁾ | 8A2 | (-40°C to 85°C) |
| AT93C56A-10TU-1.8 ⁽²⁾ | 8A2 | |
| AT93C56AU3-10UU-1.8 ⁽²⁾ | 8U3-1 | |
| AT93C56AY1-10YU-1.8 ⁽²⁾ (Not recommended for new design) | 8Y1 | |
| AT93C56AY6-10YH-1.8 ⁽³⁾ | 8Y6 | |
| AT93C56A-W1.8-11 ⁽⁴⁾ | Die Sales | Industrial Temperature (-40°C to 85°C) |

Notes: 1. For 2.7V devices used in the 4.5V to 5.5V range, please refer to performance values in the AC and DC characteristics table.

- 2. "U" designates Green package + RoHS compliant.
- 3. "H" designates Green package + RoHS compliant, with NiPdAu Lead Finish.
- 4. Available in waffle pack and wafer form; order as SL788 for inkless wafer form. Bumped die available upon request. Please contact Serial EEPROM Marketing.

| | Package Type | | | | | |
|-------|--|--|--|--|--|--|
| 8P3 | 8-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP) | | | | | |
| 8S1 | 8-lead, 0.150" Wide, Plastic Gull Wing Small Outline (JEDEC SOIC) | | | | | |
| 8S2 | 8-lead, 0.200" Wide, Plastic Gull Wing Small Outline (EIAJ SOIC) | | | | | |
| 8A2 | 8-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) | | | | | |
| 8U3-1 | 8-ball, die Ball Grid Array Package (dBGA2) | | | | | |
| 8Y1 | 8-lead, 4.90 mm x 3.00 mm Body, Dual Footprint, Non-leaded, Miniature Array Package (MAP) | | | | | |
| 8Y6 | 8-lead, 2.00 mm x 3.00 mm Body, 0.50 mm Pitch, Ultra Thin Mini-MAP, Dual No Lead package (DFN), (MLP 2x3 mm) | | | | | |
| | Options | | | | | |
| -2.7 | Low-voltage (2.7V to 5.5V) | | | | | |
| -1.8 | Low-voltage (1.8V to 5.5V) | | | | | |

AT93C66A Ordering Information⁽¹⁾

| Ordering Code | Package | Operation Range |
|---|----------|-------------------------|
| AT93C66A-10PU-2.7 ⁽²⁾ | 8P3 | |
| AT93C66A-10PU-1.8 ⁽²⁾ | 8P3 | |
| AT93C66A-10SU-2.7 ⁽²⁾ | 8S1 | |
| AT93C66A-10SU-1.8 ⁽²⁾ | 8S1 | |
| AT93C66AW-10SU-2.7 ⁽²⁾ | 8S2 | Lead-free/Halogen-free/ |
| AT93C66AW-10SU-1.8 ⁽²⁾ | 8S2 | Industrial Temperature |
| AT93C66A-10TU-2.7 ⁽²⁾ | 8A2 | (–40°C to 85°C) |
| AT93C66A-10TU-1.8 ⁽²⁾ | 8A2 | |
| AT93C66AU3-10UU-1.8 ⁽²⁾ | 8U3-1 | |
| AT93C66AY1-10YU-1.8 ⁽²⁾ (Not recommended for new design) | 8Y1 | |
| AT93C66AY6-10YH-1.8 ⁽³⁾ | 8Y6 | |
| AT93C66A-W1.8-11 ⁽⁴⁾ | Die Sale | Industrial Temperature |
| A100000A-W1.0-11 | Dic Sale | (-40°C to 85°C) |

- Notes: 1. For 2.7V devices used in the 4.5V to 5.5V range, please refer to performance values in the AC and DC characteristics table.
 - 2. "U" designates Green package + RoHS compliant.
 - 3. "H" designates Green package + RoHS compliant, with NiPdAu Lead Finish.
 - 4. Available in waffle pack and wafer form; order as SL788 for inkless wafer form. Bumped die available upon request. Please contact Serial EEPROM Marketing.


| | Package Type | | | | | |
|-------|--|--|--|--|--|--|
| 8P3 | 8-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP) | | | | | |
| 8S1 | 8-lead, 0.150" Wide, Plastic Gull Wing Small Outline (JEDEC SOIC) | | | | | |
| 8S2 | 8-lead, 0.200" Wide, Plastic Gull Wing Small Outline (EIAJ SOIC) | | | | | |
| 8A2 | 8-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) | | | | | |
| 8U3-1 | 8-ball, die Ball Grid Array Package (dBGA2) | | | | | |
| 8Y1 | 8-lead, 4.90 mm x 3.00 mm Body, Dual Footprint, Non-leaded, Miniature Array Package (MAP) | | | | | |
| 8Y6 | 8-lead, 2.00 mm x 3.00 mm Body, 0.50 mm Pitch, Ultra Thin Mini-MAP, Dual No Lead package (DFN), (MLP 2x3 mm) | | | | | |
| | Options | | | | | |
| -2.7 | Low-voltage (2.7V to 5.5V) | | | | | |
| -1.8 | Low-voltage (1.8V to 5.5V) | | | | | |






Packaging Information


8P3 - PDIP



Top View



End View



COMMON DIMENSIONS

(Unit of Measure = inches)

| SYMBOL | MIN | NOM | MAX | NOTE |
|--------|-------|-------|-------|------|
| Α | | | 0.210 | 2 |
| A2 | 0.115 | 0.130 | 0.195 | |
| b | 0.014 | 0.018 | 0.022 | 5 |
| b2 | 0.045 | 0.060 | 0.070 | 6 |
| b3 | 0.030 | 0.039 | 0.045 | 6 |
| С | 0.008 | 0.010 | 0.014 | |
| D | 0.355 | 0.365 | 0.400 | 3 |
| D1 | 0.005 | | | 3 |
| Е | 0.300 | 0.310 | 0.325 | 4 |
| E1 | 0.240 | 0.250 | 0.280 | 3 |
| е | (| | | |
| eA | (| 4 | | |
| L | 0.115 | 0.130 | 0.150 | 2 |


Notes:

- 1. This drawing is for general information only; refer to JEDEC Drawing MS-001, Variation BA for additional information.
- 2. Dimensions A and L are measured with the package seated in JEDEC seating plane Gauge GS-3.
- 3. D, D1 and E1 dimensions do not include mold Flash or protrusions. Mold Flash or protrusions shall not exceed 0.010 inch.
- 4. E and eA measured with the leads constrained to be perpendicular to datum.
- 5. Pointed or rounded lead tips are preferred to ease insertion.
- 6. b2 and b3 maximum dimensions do not include Dambar protrusions. Dambar protrusions shall not exceed 0.010 (0.25 mm).


01/09/02

| | | DRAWING NO. | REV. |
|--|--|-------------|------|
| 2325 Orchard Parkway San Jose, CA 95131 | 8P3 , 8-lead, 0.300" Wide Body, Plastic Dual In-line Package (PDIP) | 8P3 | В |


8S1 - JEDEC SOIC



Top View



Side View

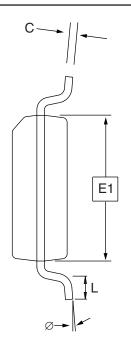

End View

COMMON DIMENSIONS

(Unit of Measure = mm)

| SYMBOL | MIN | NOM | MAX | NOTE |
|--------|----------|-----|------|------|
| А | 1.35 | - | 1.75 | |
| A1 | 0.10 | - | 0.25 | |
| b | 0.31 | _ | 0.51 | |
| С | 0.17 | - | 0.25 | |
| D | 4.80 | - | 5.00 | |
| E1 | 3.81 | _ | 3.99 | |
| Е | 5.79 | _ | 6.20 | |
| е | 1.27 BSC | | | |
| L | 0.40 | _ | 1.27 | |
| Ø | 0° | _ | 8° | |

Note: These drawings are for general information only. Refer to JEDEC Drawing MS-012, Variation AA for proper dimensions, tolerances, datums, etc.

10/7/03




1150 E. Cheyenne Mtn. Blvd. Colorado Springs, CO 80906 **TITLE 8S1**, 8-lead (0.150" Wide Body), Plastic Gull Wing Small Outline (JEDEC SOIC)


| DRAWING NO. | REV. |
|-------------|------|
| 8S1 | В |
| | |






8S2 - EIAJ SOIC





End View




COMMON DIMENSIONS (Unit of Measure = mm)

| SYMBOL | MIN | NOM | MAX | NOTE |
|--------|------|----------|------|------|
| Α | 1.70 | | 2.16 | |
| A1 | 0.05 | | 0.25 | |
| b | 0.35 | | 0.48 | 5 |
| С | 0.15 | | 0.35 | 5 |
| D | 5.13 | | 5.35 | |
| E1 | 5.18 | | 5.40 | 2, 3 |
| Е | 7.70 | | 8.26 | |
| L | 0.51 | | 0.85 | |
| Ø | 0° | | 8° | |
| е | | 1.27 BSC | | 4 |


- Notes: 1. This drawing is for general information only; refer to EIAJ Drawing EDR-7320 for additional information.
 2. Mismatch of the upper and lower dies and resin burrs are not included.

 - 3. It is recommended that upper and lower cavities be equal. If they are different, the larger dimension shall be regarded.
 - 4. Determines the true geometric position.
 - 5. Values b and C apply to pb/Sn solder plated terminal. The standard thickness of the solder layer shall be 0.010 +0.010/-0.005 mm.

10/7/03




8Y1 - MAP

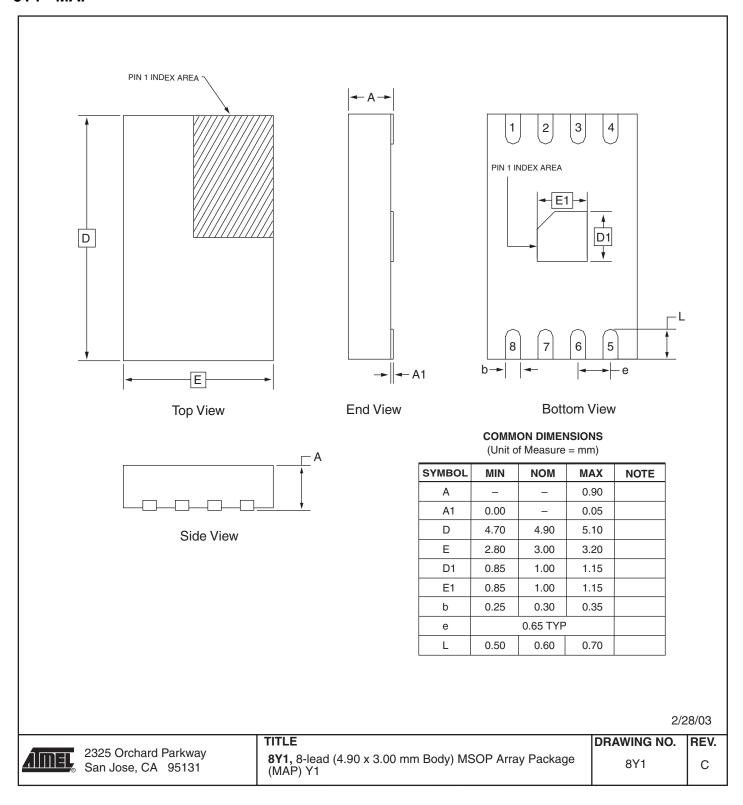



8Y6 - Mini-MAP (MLP 2x3)

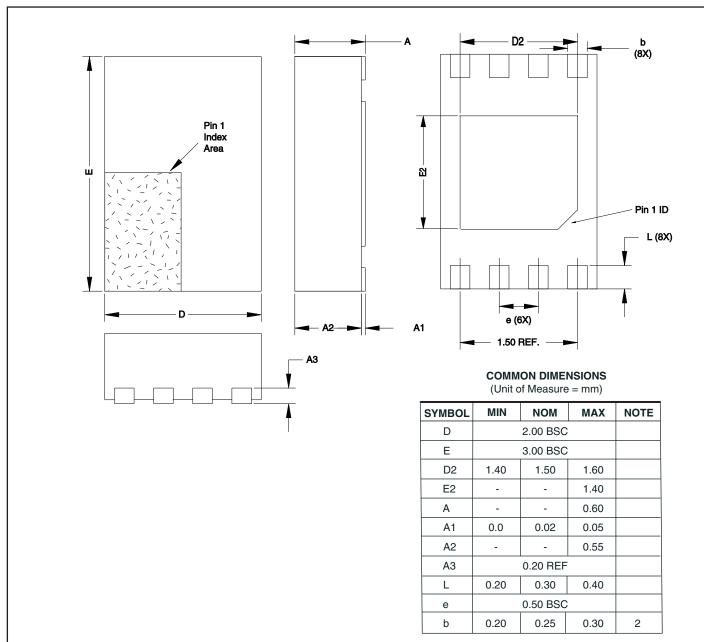


Notes:

- 1. This drawing is for general information only. Refer to JEDEC Drawing MO-229, for proper dimensions, tolerances, datums, etc.
- 2. Dimension b applies to metallized terminal and is measured between 0.15 mm and 0.30 mm from the terminal tip. If the terminal has the optional radius on the other end of the terminal, the dimension should not be measured in that radius area.


8/26/05

| I | | TITLE | DRAWING NO. | REV. |
|------------|--------------------|--|-------------|------|
| <u>Alm</u> | San Jose, CA 95131 | 8Y6 , 8-lead 2.0 x 3.0 mm Body, 0.50 mm Pitch, Utlra Thin Mini-Map, Dual No Lead Package (DFN) ,(MLP 2x3) | 8Y6 | С |

8A2 - TSSOP

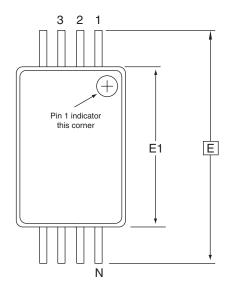

Top View



End View

COMMON DIMENSIONS

(Unit of Measure = mm) MOM

3.00

6.40 BSC

4.40

_

1.00

0.65 BSC

0.60

1.00 REF

NOTE

2, 5

3, 5

4

MAX

3.10


4.50

1.20


1.05

0.30

0.75



L1




Side View

Notes: 1. This drawing is for general information only. Refer to JEDEC Drawing MO-153, Variation AA, for proper dimensions, tolerances, datums, etc.

- 2. Dimension D does not include mold Flash, protrusions or gate burrs. Mold Flash, protrusions and gate burrs shall not exceed 0.15 mm (0.006 in) per side.
- 3. Dimension E1 does not include inter-lead Flash or protrusions. Inter-lead Flash and protrusions shall not exceed 0.25 mm (0.010 in) per side.
- 4. Dimension b does not include Dambar protrusion. Allowable Dambar protrusion shall be 0.08 mm total in excess of the b dimension at maximum material condition. Dambar cannot be located on the lower radius of the foot. Minimum space between protrusion and adjacent lead is 0.07 mm.
- 5. Dimension D and E1 to be determined at Datum Plane H.


5/30/02








8U3-1 - dBGA2




Top View



Bottom View 8 Solder Balls

- 1. This drawing is for general information only.
- 2. Dimension 'b' is measured at maximum solder ball diameter



Side View

COMMON DIMENSIONS (Unit of Measure = mm)

| MIN | NOM | MAX | NOTE |
|----------|-----------------------|---|---|
| 0.713 | 0.79 | 0.85 | |
| 0.09 | 0.14 | 0.19 | |
| 0.40 | 0.45 | 0.50 | |
| 0.20 | 0.25 | 0.30 | 2 |
| 1.50 BSC | | | |
| 2.00 BSC | | | |
| 0.50 BSC | | | |
| 0.25 REF | | | |
| 1.00 BSC | | | |
| 0.25 REF | | | |
| | 0.713 0.09 0.40 | 0.713 0.79 0.09 0.14 0.40 0.45 0.20 0.25 1.50 BS0 0.50 BS0 0.25 REI | 0.713 0.79 0.85 0.09 0.14 0.19 0.40 0.45 0.50 0.20 0.25 0.30 1.50 BSC 2.00 BSC 0.50 BSC 0.25 REF 1.00 BSC |

5/3/05



1150E Cheyenne Mt. Blvd Colorado Springs, CO 80906 TITLE

8U3-1,8-ball,1.50 x 2.00 mm Body, 0.50 mm pitch, Small Die Ball Grid Array Package (dBGA2)

DRAWING NO.

PO8U3-1

REV. b

Revision History

| Revision No. | Date | Comments |
|--------------|-------|---|
| 3378K | 12/06 | Removed DC/Don't Connect and replaced with NC/No Conenct |
| | | Adjusted size of Block diagram on pg. 2 |
| | | Made all diagrams on pages 6-9 consistently the same size |
| | | Corrected 8U3-1 |





Atmel Corporation

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311

Fax: 1(408) 487-2600

Regional Headquarters

Europe

Atmel Sarl Route des Arsenaux 41 Case Postale 80 CH-1705 Fribourg Switzerland

Tel: (41) 26-426-5555 Fax: (41) 26-426-5500

Asia

Room 1219 Chinachem Golden Plaza 77 Mody Road Tsimshatsui East Kowloon Hong Kong

Tel: (852) 2721-9778 Fax: (852) 2722-1369

Japan

9F, Tonetsu Shinkawa Bldg. 1-24-8 Shinkawa Chuo-ku, Tokyo 104-0033 Japan

Tel: (81) 3-3523-3551 Fax: (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311 Fax: 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311 Fax: 1(408) 436-4314

La Chantrerie BP 70602 44306 Nantes Cedex 3, France Tel: (33) 2-40-18-18-18 Fax: (33) 2-40-18-19-60

ASIC/ASSP/Smart Cards

Zone Industrielle 13106 Rousset Cedex, France Tel: (33) 4-42-53-60-00

Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd. Colorado Springs, CO 80906, USA

Tel: 1(719) 576-3300 Fax: 1(719) 540-1759

Scottish Enterprise Technology Park Maxwell Building East Kilbride G75 0QR, Scotland

Tel: (44) 1355-803-000 Fax: (44) 1355-242-743

RF/Automotive

Theresienstrasse 2 Postfach 3535 74025 Heilbronn, Germany Tel: (49) 71-31-67-0

Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd. Colorado Springs, CO 80906, USA

Tel: 1(719) 576-3300 Fax: 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine BP 123

38521 Saint-Egreve Cedex, France

Tel: (33) 4-76-58-30-00 Fax: (33) 4-76-58-34-80

Literature Requests www.atmel.com/literature

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDI-TIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDEN-TAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© 2006 Atmel Corporation. All rights reserved. Atmel®, logo and combinations thereof, Everywhere You Are® and others, are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.



Printed on recycled paper.