

ADVANCE INFORMATION

All information in this data sheet is preliminary and subject to change.

8/93

EVALUATION KIT AVAILABLE

3V/3.3V/5V/Adjustable-Output, Step-Up DC-DC Converters

General Description

The MAX777/MAX778/MAX779 are pulse-skipping, DC-DC converters that step-up from low-voltage inputs (1V, guaranteed). They require only three external components—an inductor (typically 22μH), and two capacitors. The MAX777 delivers a 5V output, the MAX778 generates pin-selectable voltages of 3.0V or 3.3V, and the MAX779 output can be adjusted from 1V to 6V via an external resistor divider.

The devices include an active rectifier that eliminates the need for an external catch diode. It also permits regulation even when the input is greater than the output. And, unlike other step-up converters, the MAX777/MAX778/MAX779's active rectifier is disabled in shutdown mode. When disabled, the active rectifier appears as a very high impedance in series with the input, inductor, and load. This high impedance effectively stops current drain associated with conventional step-up converters in the shutdown state.

The high-frequency operation of these devices (up to 300kHz) allows the use of small surface-mount inductors with values of 10μH or less. Supply current is 220μA under no load and only 20μA in the standby mode. Supply voltage can range from 1V to 6.2V (1 to 4 cells). With a 2V input, these devices can deliver 200mA at 5V or 300mA at 3V.

For step-up/step-down applications (where the input can be both above and below the output), refer to the MAX877/MAX878/MAX879 data sheet.

Applications

Single Battery-Cell (1V), Step-Up Voltage Conversion

Efficient, High-Power Step-Up Regulation from Low Input Voltages


Pagers

Portable Instruments & Handy-Terminals

Laptop and Palmtop Computers

Pin Configuration

TOP VIEW

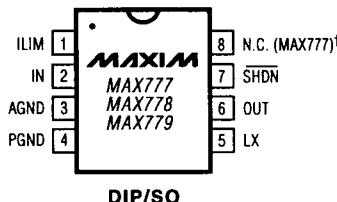

† 3/3.3 (MAX778), FB (MAX779)

MAXIM

Low-Voltage-Input,

Step-Up DC-DC Converters

Features

- ◆ 1V to 6.2V Input Guaranteed Start-Up Under Load
- ◆ Up to 240mA Outputs
- ◆ 85% Typical Efficiency
- ◆ Also Regulates When Input Voltage is Above the Output Voltage
- ◆ Internal 1A Power Switch
- ◆ Adjustable Current-Limit
- ◆ Internal 1A Active Rectifier with Input-to-Load Disconnect in Shutdown
- ◆ 220μA Quiescent Supply Current
- ◆ 20μA Shutdown Supply Current
- ◆ 3V/3.3V, 5V, and Adjustable Output-Voltage Versions


Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE
MAX777CPA	0°C to +70°C	8 Plastic DIP
MAX777CSA	0°C to +70°C	8 SO
MAX777C/D	0°C to +70°C	Dice*
MAX777EPA	-40°C to +86°C	8 Plastic DIP
MAX777ESA	-40°C to +85°C	8 SO
MAX777MJA	-55°C to +125°C	8 CERDIP

Ordering Information continued on last page.

* Contact factory for dice specifications.

Typical Operating Circuit

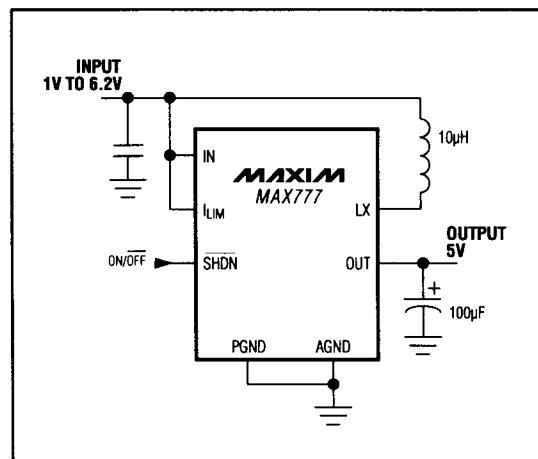

Low-Voltage-Input, 3V/3.3V/5V/Adjustable-Output, Step-Up DC-DC Converters

ELECTRICAL CHARACTERISTICS

($V_{IN} = 2.5V$, $I_{LOAD} = 0mA$, $L_X = 22\mu H$, $C_F = 100\mu F$, $\$HDN$ and I_{LIM} connected to IN, $T_A = +25^\circ C$, unless otherwise noted.)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	
Output Voltage MAX778	0mA < I_{LOAD} < 100mA	3V/3.3V = open: 1.0V < V_{IN} < 3V ($T_A = +25^\circ C$), 1.1V < V_{IN} < 3V (C temp range), 1.2V < V_{IN} < 3V (E temp range)	2.88	3.00	3.12	V
		3V/3.3V = 0V: 1.0V < V_{IN} < 3.3V ($T_A = +25^\circ C$), 1.1V < V_{IN} < 3.3V (C temp range), 1.2V < V_{IN} < 3.3V (E temp range)	3.17	3.30	3.43	
	0mA < I_{LOAD} < 240mA	3V/3.3V = open: 1.8V < V_{IN} < 3V ($T_A = T_{MIN}$ to T_{MAX})	2.88	3.00	3.12	
		3V/3.3V=0V: 1.8V < V_{IN} < 3V ($T_A = T_{MIN}$ to T_{MAX})	3.17	3.30	3.43	
	0mA < I_{LOAD} < 60mA	1.0V < V_{IN} < 5V ($T_A = +25^\circ C$), 1.1V < V_{IN} < 5V (C temp range), 1.2V < V_{IN} < 5V (E temp range)	4.8	5.0	5.2	
		0mA < I_{LOAD} < 150mA	1.8V < V_{IN} < 5V ($T_A = T_{MIN}$ to T_{MAX})	4.8	5.0	5.2
Efficiency	$I_{LOAD} = 100mA$, $V_{IN} = 2.5V$	86			%	
No-Load Supply Current	$T_A = T_{MIN}$ to T_{MAX} , $I_{LOAD} = 0mA$	220	310		μA	
Shutdown Supply Current	$T_A = T_{MIN}$ to T_{MAX} , $0V < \$HDN < V_{STH}$	0	20	30	μA	
$\$HDN$ Bias Current	$T_A = T_{MIN}$ to T_{MAX}	0V < $\$HDN < V_{STH}$	100		nA	
		$V_{STH} < \$HDN < 5V$	40		μA	
$\$HDN$ Threshold (V _{STH})	$T_A = T_{MIN}$ to T_{MAX}	$V_{IN} = 1V$	0.55	0.90	V	
		$V_{IN} = 2.5V$	1.20	1.60		
		$V_{IN} = 5V$	2.00	2.80		
SHDN Enable Delay			150		μs	
Current Limit			1.0		A	
Current Limit Tempco			-0.3		$^\circ C$	
Switch Saturation Voltage	$I_{SW} = 400mA$	0.275			V	
	$I_{SW} = 600mA$	0.350				
	$I_{SW} = 1000mA$	0.550				
Switch-Off Leakage Current	$T_A = T_{MIN}$ to T_{MAX} , $0V < \$HDN < V_{STH}$	0.4	2.0		μA	
Maximum Switch-On Time	$V_{IN} = 2.5V$	4.0			μs	
	$V_{IN} = 1.8V$	5.9				
	$V_{IN} = 1V$	12.6				
Minimum Switch-Off Time	MAX778	2.5			μs	
	MAX777	1.5				
Rectifier Forward Voltage Drop	$I_{OUT} = 400mA$	0.21			V	
	$I_{OUT} = 600mA$	0.31				
	$I_{OUT} = 1000mA$	0.50				

Low-Voltage-Input, 3V/3.3V/5V/Adjustable-Output, Step-Up DC-DC Converters

ELECTRICAL CHARACTERISTICS (continued)

(VIN = 2.5V, ILOAD = 0mA, LX = 22µH, CF = 100µF, SHDN and IN connected to VIN, TA = +25°C, unless otherwise noted.)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Output Current in Shutdown Output Current in Shutdown	0V < SHDN < VSTH, TA = TMIN to TMAX	MAX778, VOUT = 3V	10	20	µA
		MAX777, VOUT = 5V	10	20	
Reverse Leakage Current into LX	0V < SHDN < VSTH, TA = TMIN to TMAX	MAX778, VOUT = 3V	0.1	3.0	µA
		MAX777, VOUT = 5V	0.1	3.0	
Operating Input Voltage MAX778	3V/3.3V = open	TA = +25°C	1.0	6.2	V
		C temp. range	1.1	6.2	
		E temp. range	1.2	6.2	
	3V/3.3V = 0V	TA = +25°C	1.0	6.2	
		C temp. range	1.1	6.2	
		E temp. range	1.3	6.2	
Operating Input Voltage MAX777		TA = +25°C	1.0	6.2	V
		C temp. range	1.1	6.2	
		E temp. range	1.2	6.2	
Error Comparator Trip Point	Over operating input voltage, TA = TMIN to TMAX	0.195	0.200	0.205	V
FB Pin Bias Current	MAX779, TA = TMIN to TMAX	10	40	nA	

Ordering Information (continued)

PART	TEMP. RANGE	PIN-PACKAGE
MAX778CPA	0°C to +70°C	8 Plastic DIP
MAX778CSA	0°C to +70°C	8 SO
MAX778C/D	0°C to +70°C	Dice*
MAX778EPA	-40°C to +85°C	8 Plastic DIP
MAX778ESA	-40°C to +85°C	8 SO
MAX778MJA	-55°C to +125°C	8 CERDIP
MAX779CPA	0°C to +70°C	8 Plastic DIP
MAX779CSA	0°C to +70°C	8 SO
MAX779C/D	0°C to +70°C	Dice*
MAX779EPA	-40°C to +85°C	8 Plastic DIP
MAX779ESA	-40°C to +85°C	8 SO
MAX779MJA	-55°C to +125°C	8 CERDIP

* Contact factory for availability and dice specifications.