

DESCRIPTION

The SPE0572 are designed by TVS bi-direction device that is to protect sensitive electronics from damage or latch-up due to ESD. They are designed for use in applications where board space is at a premium. SPE0572 will protect single line, and may be used on line where the signal polarities swing above and below ground.

SPE0572 offer desirable characteristics for board level protection including fast response time, low operating and clamping voltage, and no device degradation.

SPE0572 may be used to meet the immunity requirements of IEC 61000-4-2, level 4. The small SOD-723 package makes them ideal for use in portable electronics such as cell phones, PDA's, notebook computers, and digital cameras.

APPLICATIONS

- Cellular Handsets and Accessories
- ◆ Cordless Phone
- ◆ PDA
- Notebooks and Handhelds
- Portable Instrumentation
- Digital Cameras
- ◆ MP3 Player


FEATURES

- ◆ Transient protection for data lines to IEC 61000-4-2 (ESD) ±15kV (air), ±8kV (contact) IEC 61000-4-4 (EFT) 40A (5/50ns)
- ◆ Protects single I/O lines
- Working voltage: 5V
- ♦ Low leakage current
- Low operating and clamping voltages

PIN CONFIGURATION (SOD-723)



PART MARKING



ORDERING INFORMATION

Part Number	Package	Part Marking
SPE0572D72RG	SOD-723	2

※ SPE0572D72RG: Tape Reel; Pb − Free

ABSOULTE MAXIMUM RATINGS

(Ta=25°C Unless otherwise noted)


Parameter	Symbol	Typical	Unit
Peak Pulse Power (tp = 8/20 μs)	Ppk	250	W
Maximum Peak Pulse Current (tp = 8/20 μs)	Ipp	7	A
ESD per ICE 61000 – 4 – 2 (Air)	Vpp	±15	KV
ESD per ICE 61000 – 4 – 2 (Contact)	Vpp	±8	KV
Operating Junction Temperature	Тл	- 55 ∼ 150	$^{\circ}\! \mathbb{C}$
Storage Temperature Range	Tstg	- 55 ∼ 150	$^{\circ}\!\mathbb{C}$
Lead Soldering Temperature	TL	260 (10sec)	$^{\circ}\!\mathbb{C}$


ELECTRICAL CHARACTERISTICS

(Ta=25°C Unless otherwise noted)


Parameter	Symbol	Conditions	Min.	Тур	Max.	Unit
Reverse Stand – Off Voltage	Vrwm				5	V
Reverse Breakdown Voltage	VBR	It = 1 mA	6		8.5	V
Reverse Leakage Current	Ir	$V_{RWM} = 5V$, $T=25^{\circ}C$		0.01	1	μΑ
Reverse Leakage Current	Ir	$V_{RWM} = 3V$, $T=25^{\circ}C$		0.01	0.5	μΑ
Clamping Voltage	Vc	Ipp = 1A, tp = $8/20 \mu s$			11.5	V
Clamping Voltage	Vc	$Ipp = 7A$, $tp = 8/20 \mu s$			15	V
Junction Capacitance	Cj	Between I/O Pin and GND $V_R = 0V$, $f = 1MHz$		5	10	pF

TYPICAL CHARACTERISTICS

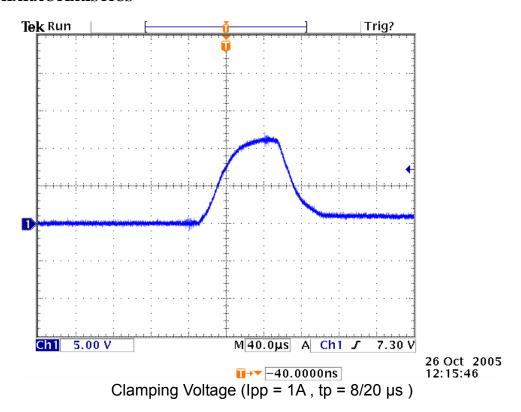

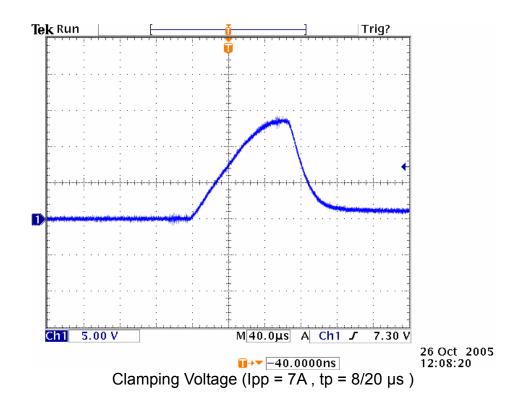

TYPICAL CHARACTERISTICS



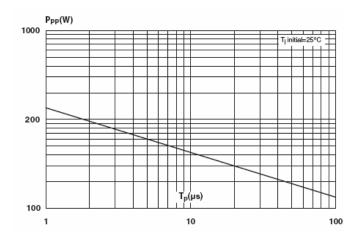


Fig 1: Junction Capacitance V.S Reverse Voltage Applied

Fig 2: Peak Plus Power V.S Exponential Plus Duration




Fig 3 : Relative Variation of Peal Plus Power V.S Initial Junction Temperature



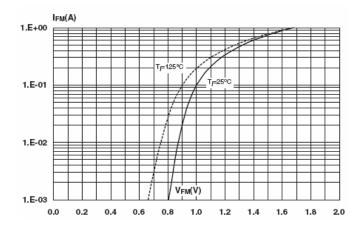


Fig 4: Forward Voltage Drop V.S Peak Forward Current



SOD-723 PACKAGE OUTLINE

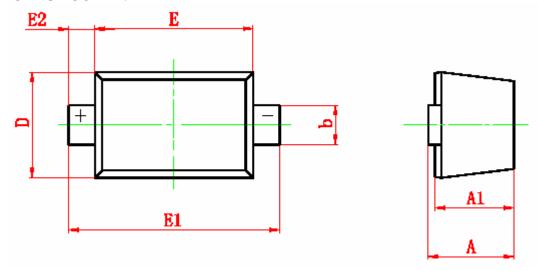



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
Α	0.525	0.650	0.021	0.026
A1	0.515	0.580	0.020	0.023
b	0.250	0.350	0.010	0.014
С	0.080	0.150	0.003	0.006
D	0.550	0.650	0.022	0.026
E	0.900	1.100	0.035	0.043
E1	1.300	1.500	0.051	0.059
E2	0.200 REF		0.008 REF	
L	0.010	0.070	0.001	0.003
θ	7° REF		7° REF	



Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties which may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

©The SYNC Power logo is a registered trademark of SYNC Power Corporation
©2004 SYNC Power Corporation – Printed in Taiwan – All Rights Reserved
SYNC Power Corporation
9F-5, No.3-2, Park Street
NanKang District (NKSP), Taipei, Taiwan, 115, R.O.C
Phone: 886-2-2655-8178

Fax: 886-2-2655-8468 ©http://www.syncpower.com