

## **SILENT POWER RELAY**


## 1 POLE—10 A LOW PROFILE TYPE

# FTR-H3 SERIES

RoHS compliant

### **■** FEATURES

- Pin compatible with widely used VS and FTR-H1 series power relays
- Ultra silent relay with patented unique U-shape spring. Noise level is about 50dB at 5cm.
- Low profile (height 16.5 mm)/ cadmium free contacts
- High isolation in small package
  - —Insulation distance : 8 mm (between coil and contacts)
  - —Dielectric strength : 5,000 VAC—Surge strength :10,000 V
- An electric life of 100,000 operations at rated load (10A, 250VAC, cos Phi 1) and satisfy at TV-5 standard.
- Plastic materials —UL94 flame class V-0
- UL (conforms to UL508, 873), CSA (conforms to CSA22.2 No.14), VDE (conforms to VDE 0435, 0631, 0700, 0860)
- Conforms to FIMKO, DEMKO
- Lead free and cadmium free contacts
- Sealed type relay

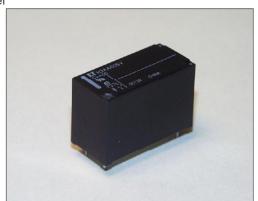

#### ORDERING INFORMATION

 $[Example] \qquad \frac{FTR-H3}{(a)} \quad \frac{A}{(b)} \quad \frac{A}{(c)} \quad \frac{012}{(d)} \quad \frac{V}{(e)}$ 

(a)	Series Name	FTR-H3: FTR-H3 Series
(b)	Contact Arrangement	A : 1 form A
(c)	Coil Type	A : Standard type
(d)	Nominal Voltage	005 : 5 VDC
(e)	Contact Material/TV TypeT	V : Gold overlay silver alloy

Ordering Code Actual Marking FTR-H3AA05V H3AA05V

1

### ■ SPECIFICATIONS


ltem			FTR-H3AA ( )( )		
	Arrangement		1 Form A		
	Material		Silver alloy		
	Style		Single		
	Resistance (initial)		Max. 100 ohms (at 1A 6 VDC)		
Contact	Rating		10A 250 VAC / 30 VDC		
Comaci	Max. carrying current		14A		
	Max. switching power		2,500VA/300W		
	Max. switching voltage		400VAC/300VDC		
	Min. switching load		10mA 5VDC		
	Max. inrush current		78A 120VAC (at lamp load)		
	Nominal power (at 20°C)		530mW		
Coil	Operate power (at 20°C)		260mW		
	Operating temperature		-40° C to +75° C (no frost)		
Time value	Operate (without diode)		Max. 10ms (at nominal voltage, without bounce)		
Tillie value	Release (without diode)		Max. 5ms (at nominal voltage, without bounce)		
	Resistance	(at 500VDC)	Min. 1,000 Mohms		
Insulation	Dielectric	B/T contacts	1,000VAC, 1 minute		
insulation	Strength	B/T coil and contacts	5,000VAC, 1 minute		
	Surge strength		Standard 10,000V (at1.2x50 µsec.)		
	Mechanical		2x10 <sup>7</sup> operations minimum		
Life	Electrical (resistive load)		1x10 <sup>5</sup> operations min. (10A 250VAC/30VDC) 2.5x10 <sup>4</sup> operations min. (TV-5 rating)		
Vibration	Misoperation		10 to 55 Hz at double amplitude of 1.65mm		
resistance	Endurance		10 to 55 Hz at double amplitude of 3.3mm		
Shock	Misoperation		Min. 100m/s² (11±1ms)		
resistance	Endurance		Min. 1,000m/s² (6±1ms)		
Weight			Approx. 12g		
Average sour	nd pressure		Approx. 50dB at 5cm		

### ■ COIL DATA CHART


Coil Number	Nominal Voltage	Coil Resistance (±10%)	Operate Voltage	Release Voltage	Nominal Power (±10%)
005	5	47 Ω	3.5 VDC	0.5 VDC	- 530mW
009	9	155 Ω	6.3 VDC	0.9 VDC	
012	12	270 Ω	8.4 VDC	1.2 VDC	
024	24	1,100Ω	16.8 VDC	2.4 VDC	

Note: All values in the table are measured at 20°C.


### **■** DIMENSIONS

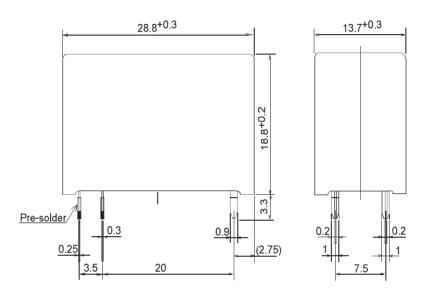

Schematics (BOTTOM VIEW)



 PC board mounting hole layout (BOTTOM VIEW)

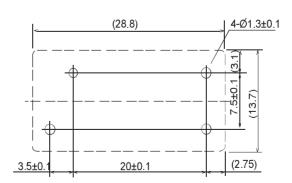

Unit: mm

## **RoHS Compliance and Lead Free Relay Information**

### 1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free
  now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info.
  (http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and most power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

### 2. Recommended Lead Free Solder Profile

• Recommended solder paste Sn-3.0Ag-0.5Cu.

#### **Reflow Solder condtion**

#### Flow Solder condtion:

Pre-heating: maximum 120°C dip within 5 sec. at 260°C soler bath

### Solder by Soldering Iron:

Soldering Iron

Temperature: maximum 360°C Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

### 3. Moisture Sensitivity

Moisture Sensitivity Level standard is not applicable to electromechanical realys.

#### 4. Tin Whisker

• Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

### Fujitsu Components International Headquarter Offices

Fujitsu Component Limited Gotanda-Chuo Building

3-5, Higashigotanda 2-chome, Shinagawa-ku Tokyo 141, Japan Tel: (81-3) 5449-7010

Fax: (81-3) 5449-2626 Email: promothq@ft.ed.fujitsu.com Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc. 250 E. Caribbean Drive 200 E. Carlibbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: marcom@fcai.fujitsu.com

Web: http://www.fujitsu.com/us/services/edevices/components/

**Europe**Fujitsu Components Europe B.V.

Diamantlaan 25 2132 WV Hoofddorp Netherlands

Tel: (31-23) 5560910 Fax: (31-23) 5560950

Email: info@fceu.fujitsu.com
Web: http://www.fujitsu.com/emea/services/components/

Asia Pacific

Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #04-01 Citilink Warehouse Complex

Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@fcal.fujitsu.com

Web: http://www.fujitsu.com/sg/services/micro/components/

©2005 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property off their respective

Fujitsu Components America does not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. reserves the right to change specifications/datasheets without prior notice. Rev. 11/18/2005.