JRC SAW FILTER NSVA339

Application

PAGER 155MHz

Electrical Specification: (Table 1)

The device characteristics are measured in the circuit shown in Fig.1.

Table 1. Electrical Specifications

Item		Spec.
Input and Output Impedance		210Ω//-7.5pF
Nominal Center Frequency (f0)		155MHz
Insertion Loss	150.5~159.5MHz	7.0dB max.
Response Variation	150.5~159.5MHz	2.5dB max.
Out of Band Rejection	193.8MHz	42.0dB min.
(Relative to Through Level)	116.2MHz	50.0dB min.

(Operating Temperature Range: -10~+60°C)

Maximum Rating: (Table 2)

Table 2. Maximum Ratings

Item	Rating
Maximum Input Power	0dBm
Maximum DC Voltage	7.5V
Operating Temperature Range	-10~+60°C
Storage Temperature	-30~+85°C

Mechanical Specifications: (Fig.2)

Package is designed as small as 5.2x4.5x1.5[mm³] for SMD (Surface Mount Device) type.

Notice:


This part is electrostatic discharge sensitive and may be damaged by improper handling.

Communications Equipment Division
Communications Equipment Marketing Department

Japan Radio Co., Ltd.

17-22 Akasaka 2-chome minato-ku, Tokyo. 107-0052 Japan Tel. +81 3-3584-8811 Fax. +81 3-3584-8876

http://www.jrc.co.jp/product/comm/deveice/saw/saw_top.html (Japanese) http://www.jrc.co.jp/product/comm/device/saw/saw_top_e.html (English)

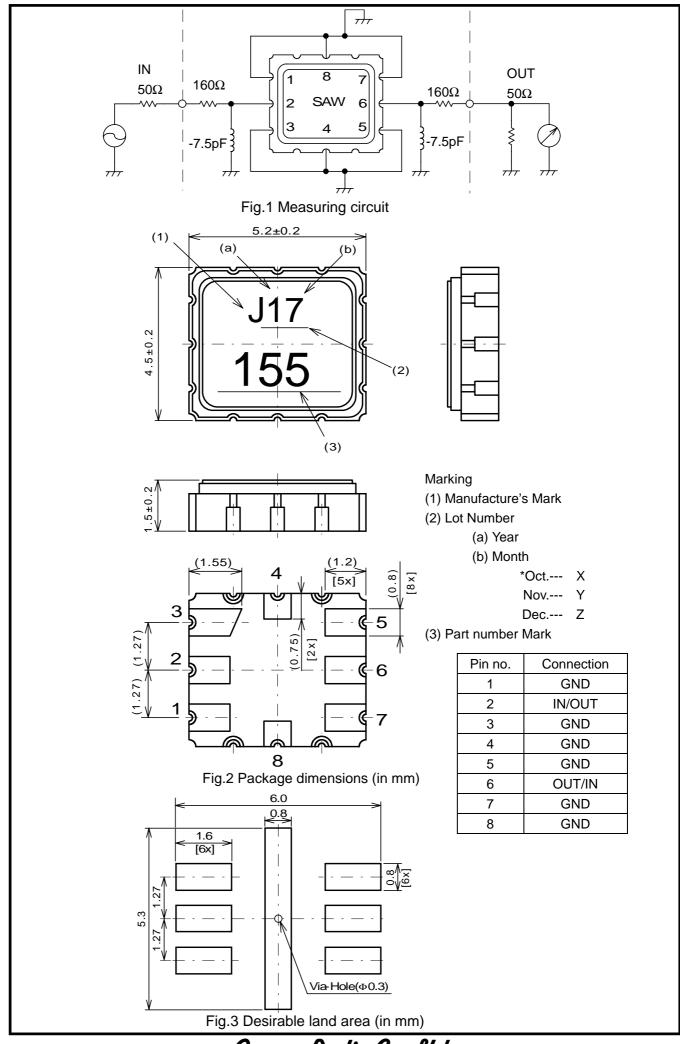

Japan Radio Co., Ltd.

Notice

- Use this component within operating temperature range. It might not be satisfied with electrical specification without operating temperature range. When it is used less than -10°C or more than +60°C, it might be a cause of degradation or destruction of the component. Even if it endures during a short time, it causes degradation of qualification.
- 2. When soldering iron is used, solder with the temperature at the tip of soldering iron: 350°C max., the time of soldering: 10 seconds max., the power of soldering iron: 30W max..
- 3. Notice that the allowed time of soldering with soldering iron is accumulated time, when soldering is repeated.
- 4. As rapid temperature change for cleaning after reflow soldering might be a cause of destruction clean this component after confirming that temperature of this component goes down to room temperature.
- 5. Confirm that there are not any influence for qualification to this component in mounting on PCB when this component is cleaned.
- As it might be a cause of degradation of destruction to apply static electricity to this component, do not apply static electricity or excessive voltage while assembling and measuring. And do not transport this component with bare hand.
- 7. As it might be a cause of degradation or destruction to apply D.C. voltage between each terminal, apply D.C. voltage 7.5V max. in actual circuit.

Note

 This specification specifies the quality of this component as a single unit. Make sure that this component is evaluated and confirmed against this specification when it is mounted to your products.