# Si photodiode **\$2592/\$3477** series

Thermoelectrically cooled photodiode for low-light-level detection in UV to near IR



S2592/S3477 series sensors combine a UV to near infrared Si photodiode with a thermoelectric cooler. A thermistor is also included in the same package to sense the Si photodiode chip temperature. This allows stable operation over long periods of time, making these sensors suitable for low-light-level detection where a high S/N is required.

S2592 series is hermetically sealed in a TO-8 package, and S3477 series in a TO-66 package. A dedicated temperature controller (C1103-04) and heatsink (A3179 series) are also available as options (sold separately).

#### Features

- High S/N
- High UV sensitivity
- Built-in thermistor allows stable operation

#### Applications

Low-light-level detection

■ General ratings

= Contoral ratingo					
Parameter	S2592-03	S3477-03	S2592-04	S3477-04	Unit
Built-in photodiode	S1336 series				-
Window material	Sapphire glass				-
Active area	2.4 × 2.4		5.8 × 5.8		mm
Package	TO-8	TO-66	TO-8	TO-66	

■ Absolute maximum ratings

Parameter	Symbol	Value	Unit
Reverse voltage	VR	5	V
Operating temperature	Topr	-40 to +70	°C
Storage temperature	Tstg	-55 to +85	°C
Allowable current for thermoelectric cooler	Ite	1.5	Α
Thermistor power dissipation	Pth	0.2	mW


■ Electrical and optical characteristics (Tvp. Ta=25 °C)

Electrical and optical characteristics (Typ. 1a-25 C)							
Parameter	Symbol	Condition	S2592-03	S3477-03	S2592-04	S3477-04	Unit
Spectral response range	λ			190 to	1100		nm
Peak sensitivity wavelength	λр		960		nm		
Photo sensitivity	S	λ=λρ	0.5		A/W		
Short circuit current	Isc	100 lx, 2856 K	5 28		28	μA	
Dark current	ID	VR=10 mV	10 25		pА		
Temperature coefficient of dark current	TCID		1.15		times/°C		
Rise time	tr	$VR=0 V, RL=1 k\Omega$	0	.2		1	μs
Terminal capacitance	Ct	VR=0 V	6	5	3	80	pF
Shunt resistance	Rsh	VR=10 mV	•	1	0	.4	GΩ
Noise equivalent power	NEP	VR=0 V, λ=λp	8.1 ×	10 <sup>-15</sup>	1.3 ×	: 10 <sup>-14</sup>	W/Hz <sup>1/2</sup>
Cooling temperature	ΔΤ		35		°C		




# Si photodiode S2592/S3477 series

#### ■ Spectral response

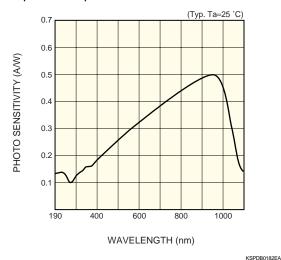


#### ■ Photo sensitivity temperature characteristic




KSPDB0053EB

#### ■ Shunt resistance vs. element temperature

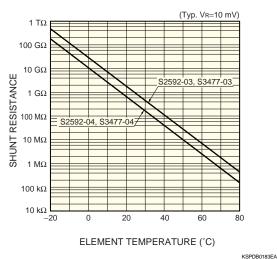


■ Cooling characteristics of TE-cooler

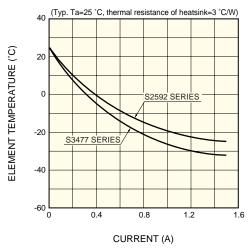


KSPDB0184EA

#### ■ Current vs. voltage characteristic of TE-cooler

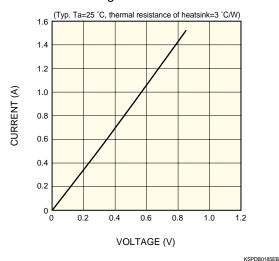


■ Thermistor temperature characteristic

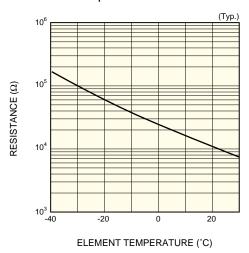

KIRDB0116EA


#### ■ Dimensional outlines (unit: mm)

#### S2592 series

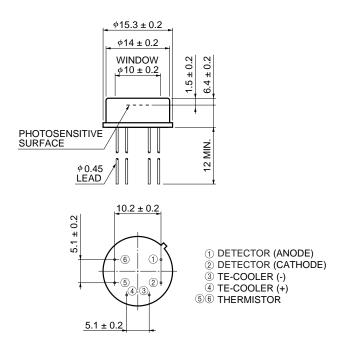

KSPDA0133EA

#### S3477 series

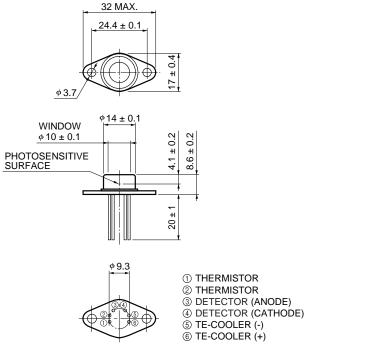

KSPDA0134EC

# Temperature controller for TE-cooled detector

C1103-04



By adjusting the current flowing through the thermoelectric cooler in a onestage or two-stage thermoelectrically cooled detector, C1103-04 maintains the detector element at a constant temperature. The cooling temperature can be easily set by using the control knob on the front panel.

#### Accessories

Instruction manual 4-conductor cable (with a connector)


A4372-05

■ Specifications (common)

	- /			
Setting element temperature	-30 to +20 °C			
Applicable detectors	One-stage or two-stage thermoelectrically cooled detectors			
Temperature stability	Within ±0.1 °C			
Temperature control output current	1.2 A Max.			
Power supply	100 V ± 10 % · 50/60 Hz *			
Power consumption	30 VA			
Dimensions and weight	108 (W) × 87 (H) × 190 (D) mm/1.9 kg approx.			
Operating temperature	+10 to +40 °C			
Operating humidity	Equal to or less than 90 %			
Storage temperature	+10 to +40 °C			

<sup>\*</sup> Power requirement (AC line voltage) can be selected from among 100 V, 115 V and 230 V at the factory prior to shipping.

#### ■ Block diagram

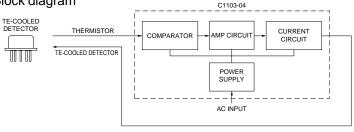



KACCC0143FA

C1103-04 conforms to European EMC directives (89/336/EEC) and LVD (73/23/EEC).


KOTHC0005EA

# Heatsink for TE-cooled detector (TO-8 package)

A3179

A3179 series heatsinks are designed for thermoelectrically cooled detectors having a 6-pin TO-8 package. Heat dissipation capacity for A3179 is about 35 °C versus the ambient temperature 25 °C.

#### ■ Dimensional outlines (unit: mm)

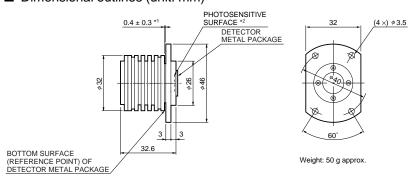

\*1: When detector element is installed.

\*2: The position of the photosensitive surface differs according to the detector element used. Refer to the dimensional outline for the detector.

KIRDA0018E

# HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions.

Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2006 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184, www.hamamatsu.com
U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218
Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658
France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 00
United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Carden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777
North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01
Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741