# Technical Data Sheet Side Emitting POWER LED

#### Features

- . High Flux Output.
- . Designed for High Current Operation.
- . Low Profile.
- . Packaged in Tubes for Use with Automatic Insertion Equipment.
- .The product itself will remain within RoHS compliant version.
- . Viewing angle 180 degree
- . ESD-withstand voltage: up to 4KV



39-06/G4C-APRB

#### Descriptions

This revolutionary package design allows the light designer to reduce the number of LEDs required and provide a more uniform and unique illuminated appearance than with other LED solutions. This is possible through the efficient optical package design and high-current capabilities.

The low profile package can be easily coupled with reflectors or lenses to efficiently distribute light and provide the desired light appearance.

## Applications

- . Automotive Lighting
- . Electronic Signs and Signals
- . Special Lighting application

### **Device Selection Guide**


PART NO.	C		
	Material	<b>Emitted</b> Color	Lens Color
39-06/G4C-APRB	InGaN	Brilliant Green	Water Clear


http://www.everlight.com Established date: 05-18-2007


# Technical Data Sheet Side Emitting POWER LED


# 39-06/G4C-APRB

### **Package Dimensions**









#### Notes: 1.All dim

2.An epoxy meniscus may extend about 1.5mm(0.059") down the leads

3. Tolerances unless dimensions  $\pm 0.25$  mm

## Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Units
Continuous Forward Current	$I_{\rm F}$	30	mA
Peak Forward Current(Duty 1/10 @ 1KHZ)	I <sub>FP</sub>	100	mA
Reverse Voltage	V <sub>R</sub>	5	V
Operating Temperature	T <sub>opr</sub>	-40 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +100	°C
Soldering Temperature(T=5 sec)	T <sub>sol</sub>	$260 \pm 5$	°C
LED Junction Temperature	Tj	125	°C
Power Dissipation	P <sub>d</sub>	100	mW
Zener Reverse Current	Iz	100	mA
Electrostatic Discharge	ESD	4000	V

Everlight Electronics Co., Ltd. Device number: DLE-309-003 http://www.everlight.com Established date: 05-18-2007 Rev. 1 Page: 2 of 7 Established by: Jim Lin

# Technical Data Sheet Side Emitting POWER LED

# 39-06/G4C-APRB

Electro-Optical Characteristics (Ta=25°C)						
Parameter	Symbol	Min.	Тур.	Max.	Condition	Unit
Total Flux	Φv	2850	4200	5650	IF=30mA	mlm
Viewing Angle	$2 \theta 1/2$		180		IF=30mA	deg
Peak Wavelength	λp		518		IF=30mA	nm
Dominant Wavelength	λd	520	525	532	IF=30mA	nm
Spectrum Radiation Bandwidth	$ riangle \lambda$		36		IF=30mA	nm
Forward Voltage	VF	3.0	3.5	4.0	IF=30mA	V
Zener Reverse Voltage	Vz			10	Iz=5mA	V
Reverse Current	IR			10	VR=5V	uA

### Rank

39-06/G4C-APRB

(1) (2)

(3)

	(1) VF(V)	)	(2) $\lambda d(nm)$		$(3)\Phi v(mlm)$			
Bin	Min	Max	Bin	Min	Max	Bin	Min	Max
1	3.00	3.20	3	520	524	Р	2850	3600
2	3.20	3.40	4	524	528	Q	3600	4500
3	3.40	3.60	5	528	532	R	4500	5650
4	3.60	3.80						
5	3.80	4.00						

\*Measurement Uncertainty of Forward Voltage :  $\pm 0.1V$ 

\*Measurement Uncertainty of Luminous Intensity: ±15%

\*Measurement Uncertainty of Dominant Wavelength ±1.0nm

http:\\www.everlight.com Established date: 05-18-2007




# Technical Data Sheet Side Emitting POWER LED


## 39-06/G4C-APRB

# **Typical Electro-Optical Characteristics Curves**


**Relative Intensity vs. Wavelength** 



**Relative Intensity vs. Forward Current** 




**Relative Intensity vs. Angle Displacement** 




Everlight Electronics Co., Ltd. Device number: DLE-309-003 http://www.everlight.com Established date: 05-18-2007


Forward Current vs. Forward Voltage



#### Forward Current vs. Ambient Temp.



**Relative Intensity vs. Off Axis Angle** 



Rev. 1 Page: 4 of 7 Established by: Jim Lin

# Technical Data Sheet Side Emitting POWER LED


## 39-06/G4C-APRB

## **Packing Quantity Specification**


- (1) 60 pcs/1 tube, 30 tubes/1 small inside box, 12 small inside boxes/1 outside box.
- (2) 60 pcs/1 tube, 105 tubes/1 big inside box, 8 big inside boxes/1 outside box.

### Label Form Specification

(1)Tube Label Form



(2)Box Label Form



PART NO: Everlgiht's Production Number

QTY: Packing Quantity LOT NO: Lot Number

CAT: Ranks of Forward Voltage, Dominant Wavelength and Total Flux

CPN: Customer's Production Number

P/N : Production Number

HUE: Reference

**REF:** Reference

MADE IN TAIWAN: Production Place


http://www.everlight.com Established date: 05-18-2007

# Technical Data Sheet Side Emitting POWER LED

## 39-06/G4C-APRB

#### Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. Below the zener reference voltage Vz, all the current flows through LED and as the voltage rises to Vz, the zener diode "breakdown." If the voltage tries to rise above Vz current flows through the zener branch to keep the voltage at exactly Vz.
- 5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode. if either piece of LED is no light up but current can flow through causing others to light.

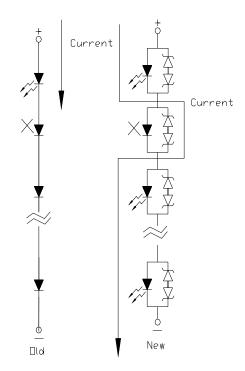

http://www.everlight.com Established date: 05-18-2007 Rev. 1 Page: 6 of 7 Established by: Jim Lin

# Technical Data Sheet Side Emitting POWER LED

## 39-06/G4C-APRB

#### 6. Soldering Condition

Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

Hand Soldering		DIP Soldering		
Temp. at tip of iron	400°C Max. (30W Max.)	Preheat temp.	100°C Max. (60 sec Max.)	
Soldering time	3 sec Max.	Bath temp.	265 Max.	
Distance	3mm Min.(From solder joint	Bath time.	5 sec Max.	
	to case)			
		Distance	3mm Min.	

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http:*\\www.everlight.com

Everlight Electronics Co., Ltd. Device number: DLE-309-003 http://www.everlight.com Established date: 05-18-2007 Rev. 1 Page: 7 of 7 Established by: Jim Lin