# SPECIFICATIONS FOR NICHIA CHIP TYPE $\mathbf{RED}$ LED $\mathsf{MODEL}: \mathbf{NSSR064T}$

NICHIA CORPORATION

### 1.SPECIFICATIONS

(1) Absolute Maximum Ratings

 $(Ta=25^{\circ}C)$ 

Item	Symbol	Absolute Maximum Rating Un	
Forward Current	IF	40	mA
Pulse Forward Current	IFP	160	mA
Allowable Reverse Current	Ir	85	mA
Power Dissipation	PD	100	mW
Operating Temperature	Topr	-40 ∼ +100	
Storage Temperature	Tstg	-40 ~ +100	
Dice Temperature	Tj	110	°C
Soldering Temperature	Tsld	Reflow Soldering: 260°C f	for 10sec.
		Hand Soldering : 350°C	for 3sec.

IFP Conditions : Pulse Width  $\leq 10$ msec. and Duty  $\leq 1/10$ 

(2) Thermal Characteristics

 $(Ta=25^{\circ}C)$ 

Item	Symbol	Тур.	Unit
II 4 : - 4	Rja	300	°C/W
Heat resistance	Rjs	120	°C/W

<sup>\*</sup> Rja = Heat resistance from Dice to Ambient temperature (Ta)

Rjs = Heat resistance from Dice to Solder temperature of Cathode Side (Ts)

(3) Initial Electrical/Optical Characteristics

 $(Ta=25^{\circ}C)$ 

) = Firem Cimentonia						
Item		Symbol	Condition	Тур.	Max.	Unit
Forward Voltage		VF	I <sub>F</sub> =20[mA]	(2.1)	2.5	V
Luminous Intensity		Iv	IF=20[mA]	(640)	-	mcd
C1	X	-	IF=20[mA]	0.700	-	-
Chromaticity Coordinate*	у	-	IF=20[mA]	0.299	-	-

<sup>\*</sup> Please refer to CIE 1931 chromaticity diagram.

(4) Ranking

(Ta=25°C)

Item		Symbol	Condition	Min.	Max.	Unit
	Rank T	Iv	IF=20[mA]	720	1000	mcd
Luminous Intensity	Rank S	Iv	I <sub>F</sub> =20[mA]	500	720	mcd
	Rank R	Iv	I <sub>F</sub> =20[mA]	360	500	mcd

<sup>\*</sup> Luminous Intensity Measurement allowance is  $\pm$  10%.

<sup>\*</sup> Using Nichia standard circuit board FR4, t=1.6mm, Copper foil, t=35μm

(	Color R	ank	(I	$(I_F=20\text{mA},T_a=25^{\circ}C)$		
			Ran	ık R		
	X	0.67	0.67	0.73	0.73	
	у	0.27	0.33	0.33	0.27	

- \* Color Coordinates Measurement allowance is  $\pm 0.01$ .
- \* Basically, a shipment shall consist of the LEDs of a combination of the above ranks.

The percentage of each rank in the shipment shall be determined by Nichia.

#### 2. INITIAL OPTICAL/ELECTRICAL CHARACTERISTICS

Please refer to "CHARACTERISTICS" on the following pages.

#### 3.OUTLINE DIMENSIONS AND MATERIALS

Please refer to "OUTLINE DIMENSIONS" on the following page.

Material as follows; Package : Heat-Resistant Polymer

Encapsulating Resin : Silicone Resin (with Diffused)
Electrodes : Ag Plating Copper Alloy

#### 4.PACKAGING

· The LEDs are packed in cardboard boxes after taping.

Please refer to "TAPING DIMENSIONS" and "PACKING" on the following pages.

The label on the minimum packing unit shows; Part Number, Lot Number, Ranking, Quantity

- · In order to protect the LEDs from mechanical shock, we pack them in cardboard boxes for transportation.
- The LEDs may be damaged if the boxes are dropped or receive a strong impact against them, so precautions must be taken to prevent any damage.
- · The boxes are not water resistant and therefore must be kept away from water and moisture.
- · When the LEDs are transported, we recommend that you use the same packing method as Nichia.

#### 5.LOT NUMBER

The first six digits number shows **lot number**.

The lot number is composed of the following characters;

 $\bigcirc \square \times \times \times \times - \triangle \blacksquare$ 

O - Year (7 for 2007, 8 for 2008)

☐ - Month (1 for Jan., 9 for Sep., A for Oct., B for Nov.)

×××× - Nichia's Product Number

 $\triangle$  - Ranking by Color Coordinates

Ranking by Luminous Intensity

# **6.RELIABILITY**

# (1) TEST ITEMS AND RESULTS

) IEOI IIENIO III VOI KEN	Standard			Number of
Test Item	Test Method	Test Conditions	Note	Damaged
Resistance to Soldering Heat (Reflow Soldering)	JEITA ED-4701 300 301	Tsld=260°C, 10sec. (Pre treatment 30°C,70%,168hrs.)	2 times	0/22
Solderability (Reflow Soldering)	JEITA ED-4701 300 303	Tsld=215 ± 5°C, 3sec. (using flux, Lead Solder)	1 time over 95%	0/22
Thermal Shock	JEITA ED-4701 300 307	-40°C ~ 100°C 1min. (10sec.) 1min. (Pre treatment 30°C,70%,168hrs.)	100 cycles	0/100
Temperature Cycle	JEITA ED-4701 100 105	-40°C ~ 25°C ~ 100°C ~ 25°C 30min. 5min. 30min. 5min.	100 cycles	0/100
Moisture Resistance Cyclic	JEITA ED-4701 200 203	25°C ~ 65°C ~ -10°C 90%RH 24hrs./1cycle	10 cycles	0/100
High Temperature Storage	JEITA ED-4701 200 201	Ta=100°C	1000 hrs.	0/100
Temperature Humidity Storage	JEITA ED-4701 100 103	Ta=60°C, RH=90%	1000 hrs.	0/100
Low Temperature Storage	JEITA ED-4701 200 202	Ta=-40°C	1000 hrs.	0/100
Steady State Operating Life **		Ta=25°C, IF=40mA	1000 hrs.	0/100
Steady State Operating Life of High Temperature **		Ta=85°C, IF=30mA	1000 hrs.	0/100
Steady State Operating Life of High Humidity Heat **		60°C, RH=90%, IF=20mA	1000 hrs.	0/100
Steady State Operating Life of Low Temperature **		Ta=-40°C, IF=20mA	1000 hrs.	0/100
Permanence of Marking	JEITA ED-4701 500 501	Solvent : Isopropyl Alcohol Solvent Temperature : 20 ~ 25°C Dipping Time : 5 min.	1 time	0/22
Vibration	JEITA ED-4701 400 403	$100 \sim 2000 \sim 100$ Hz Sweep 4min. 200m/s <sup>2</sup> 3directions, 4cycles	48min.	0/10
Drop		75cm	3 times	0/10
Electrostatic Discharge	JEITA ED-4701 300 304	R=1.5kΩ, C=100pF Test Voltage=2kV	3 times Negative/Positive	0/22

# (2) CRITERIA FOR JUDGING DAMAGE

			Criteria for .	Judgement
Item	Symbol	Test Conditions	Min.	Max.
Forward Voltage	VF	IF=20mA	-	U.S.L.*)× 1.1
Luminous Intensity Condition 1	Iv	IF=20mA	L.S.L.**)× 0.7	-
Luminous Intensity Condition 2 **	Iv	IF=20mA	L.S.L.**)× 0.5	-

<sup>\*)</sup> U.S.L.: Upper Standard Level

<sup>\*\*)</sup> L.S.L.: Lower Standard Level

<sup>\*\*</sup> These test items are judged by the criteria of Luminous Intensity Condition 2.

#### 7.CAUTIONS

#### (1) Moisture Proof Package

- · When moisture is absorbed into the SMT package it may vaporize and expand during soldering. There is a possibility that this can cause exfoliation of the contacts and damage to the optical characteristics of the LEDs. For this reason, the moisture proof package is used to keep moisture to a minimum in the package.
- The moisture proof package is made of an aluminum moisture proof bag. A package of a moisture absorbent material (silica gel) is inserted into the aluminum moisture proof bag. The silica gel changes its color from blue to pink as it absorbs moisture.

# (2) Storage

· Storage Conditions

Before opening the package:

The LEDs should be kept at 30°C or less and 90%RH or less. The LEDs should be used within a year. When storing the LEDs, moisture proof packaging with absorbent material (silica gel) is recommended.

# After opening the package:

The LEDs should be kept at 30°C or less and 70%RH or less. The LEDs should be soldered within 168 hours (7days) after opening the package. If unused LEDs remain, they should be stored in moisture proof packages, such as sealed containers with packages of moisture absorbent material (silica gel). It is also recommended to return the LEDs to the original moisture proof bag and to reseal the moisture proof bag again.


· If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : more than 24 hours at  $65 \pm 5$ °C

- This product has silver plated metal parts that are inside and/or outside the package body. The silver plating becomes tarnished when being exposed to an environment which contains corrosive gases. Any LED with tarnished leads may lead to poor solderability and deterioration of optical characteristics. Please do not expose the LEDs to corrosive atmosphere during storage.
- · After assembly and during use, silver plating can be affected by the corrosive gases emitted by components and materials in close proximity of the LEDs within an end product, and the gases entering into the product from the external atmosphere. The above should be taken into consideration when designing.
- · Please avoid rapid transitions in ambient temperature, especially in high humidity environments where condensation can occur.

#### (3) Recommended circuit

· In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. It is recommended to use Circuit B which regulates the current flowing through each LED. In the meanwhile, when driving LEDs with a constant voltage in Circuit A, the current through the LEDs may vary due to the variation in forward voltage (V<sub>F</sub>) of the LEDs. In the worst case, some LED may be subjected to stresses in excess of the absolute maximum rating.



• This product should be operated in forward bias. A driving circuit must be designed so that the product is not subjected to either forward or reverse voltage while it is off. In particular, if a reverse voltage is continuously applied to the product, such operation can cause migration resulting in LED damage.

# (4) Heat Generation

- Thermal design of the end product is of paramount importance. Please consider the heat generation of the LED when making the system design. The coefficient of temperature increase per input electric power is affected by the thermal resistance of the circuit board and density of LED placement on the board, as well as other components. It is necessary to avoid intense heat generation and operate within the maximum ratings given in this specification.
- · The operating current should be decided after considering the ambient maximum temperature of LEDs.

#### (5) Soldering Conditions

• The LEDs can be soldered in place using the reflow soldering method. Nichia cannot make a guarantee on the LEDs after they have been assembled using the dip soldering method.

· Recommended soldering conditions

	Reflow Soldering			oldering
	Lead Solder	Lead-free Solder		
Pre-heat	120 ∼ 150°C	180 ~ 200°C	Temperature	350°C Max.
Pre-heat time	120 sec. Max.	120 sec. Max.	Soldering time	3 sec. Max.
Peak	240°C Max.	260°C Max.		(one time only)
temperature				
Soldering time	10 sec. Max.	10 sec. Max.		
Condition	refer to	refer to		
	Temperature - profile ①.	Temperature - profile ②.		
		$(N_2 \text{ reflow is recommended.})$		


- \* Although the recommended soldering conditions are specified in the above table, reflow or hand soldering at the lowest possible temperature is desirable for the LEDs.
- \* A rapid-rate process is not recommended for cooling the LEDs down from the peak temperature.

[Temperature-profile (Surface of circuit board)] Use the conditions shown to the under figure.

Calculate Solder So

[Recommended soldering pad design]

Use the following conditions shown in the figure.



(Unit: mm)

- · Occasionally there is a brightness decrease caused by the influence of heat or ambient atmosphere during air reflow. It is recommended that the User use the nitrogen reflow method.
- The encapsulated material of the LEDs is silicone. Therefore the LEDs have a soft surface on the top of package. The pressure to the top surface will be influence to the reliability of the LEDs. Precautions should be taken to avoid the strong pressure on the encapsulated part. So when using the chip mounter, the picking up nozzle that does not affect the silicone resin should be used.
- · Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.
- · Reflow soldering should not be done more than two times.
- · When soldering, do not put stress on the LEDs during heating.
- · After soldering, do not warp the circuit board.

#### (6) Cleaning

- · It is recommended that isopropyl alcohol be used as a solvent for cleaning the LEDs. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not. Freon solvents should not be used to clean the LEDs because of worldwide regulations.
- · Do not clean the LEDs by the ultrasonic. When it is absolutely necessary, the influence of ultrasonic cleaning on the LEDs depends on factors such as ultrasonic power and the assembled condition. Before cleaning, a pre-test should be done to confirm whether any damage to the LEDs will occur.


# (7) Static Electricity

- · Static electricity or surge voltage damages the LEDs.

  It is recommended that a wrist band or an anti-electrostatic glove be used when handling the LEDs.
- · All devices, equipment and machinery must be properly grounded. It is recommended that precautions be taken against surge voltage to the equipment that mounts the LEDs.


#### (8) Others

- · NSSR064 complies with RoHS Directive.
- The LED light output is strong enough to injure human eyes. Precautions must be taken to prevent looking directly at the LEDs with unaided eyes for more than a few seconds.
- · Flashing lights have been known to cause discomfort in people; you can prevent this by taking precautions during use. Also, people should be cautious when using equipment that has had LEDs incorporated into it.
- The LEDs described in this brochure are intended to be used for ordinary electronic equipment (such as office equipment, communications equipment, measurement instruments and household appliances). Consult Nichia's sales staff in advance for information on the applications in which exceptional quality and reliability are required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as for airplanes, aerospace, submersible repeaters, nuclear reactor control systems, automobiles, traffic control equipment, life support systems and safety devices).
- · User shall not reverse engineer by disassembling or analysis of the LEDs without having prior written consent from Nichia. When defective LEDs are found, the User shall inform Nichia directly before disassembling or analysis.
- · The formal specifications must be exchanged and signed by both parties before large volume purchase begins.
- The appearance and specifications of the product may be modified for improvement without notice.

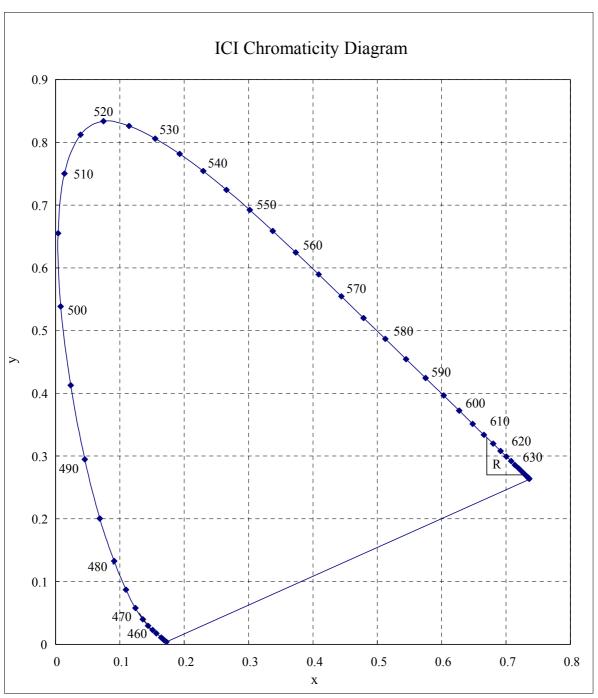


\* Color Coordinates Measurement allowance is  $\pm 0.01$ .


■ Forward Voltage vs. Forward Current




■ Ambient Temperature vs. Forward Voltage




■ Forward Current vs. Relative Luminosity




■ Ambient Temperature vs. Relative Luminosity



Duty Ratio vs.Allowable Forward Current




■ Ambient Temperature vs. Allowable Forward Current




NICHIA CORPORATION	١,	_
	1	

Model	NSSR064	
Title	CHARACTERISTICS	
No.	080616819581	


■ Ambient Temperature vs. Chromaticity Coordinate (λD)



■ Ambient Temperature vs. Dominant Wavelength




■ Spectrum




■ Forward Current vs.

Dominant Wavelength



■ Directivity

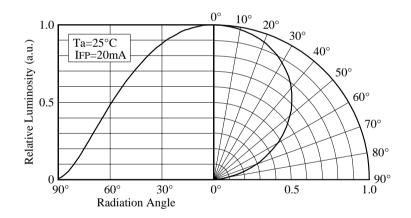


NICHIA CORPORATION Title


Model NSSR064

Title CHARACTERISTICS

No. 080616819591

Nichia STS-DA1-0293 <Cat.No.080620>

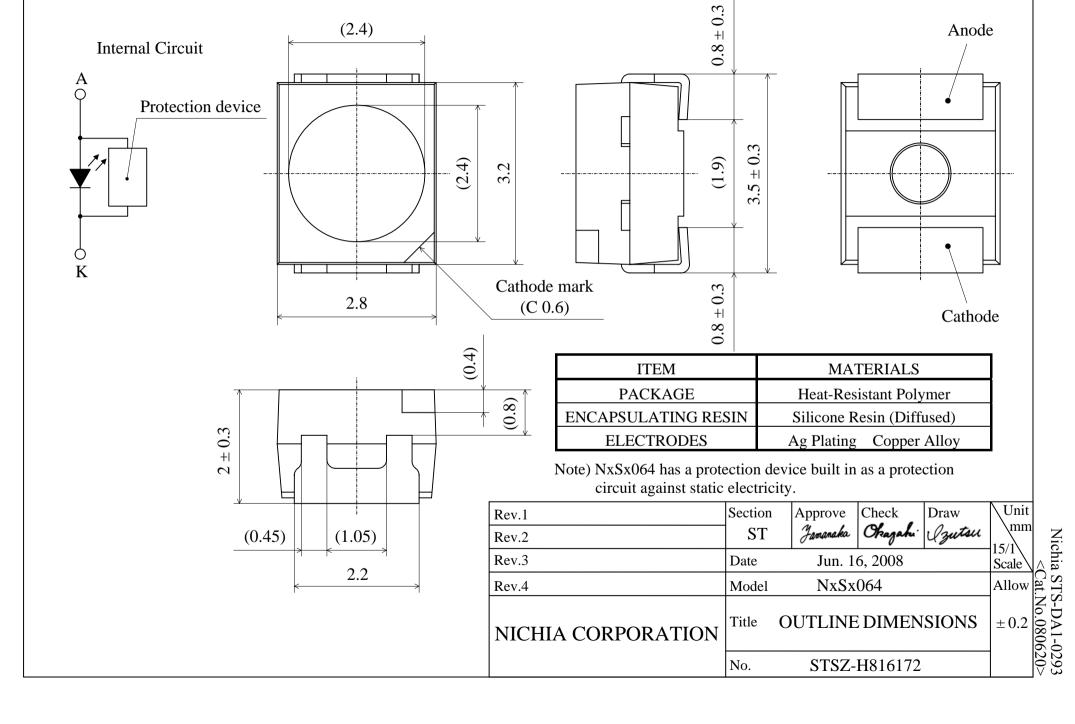

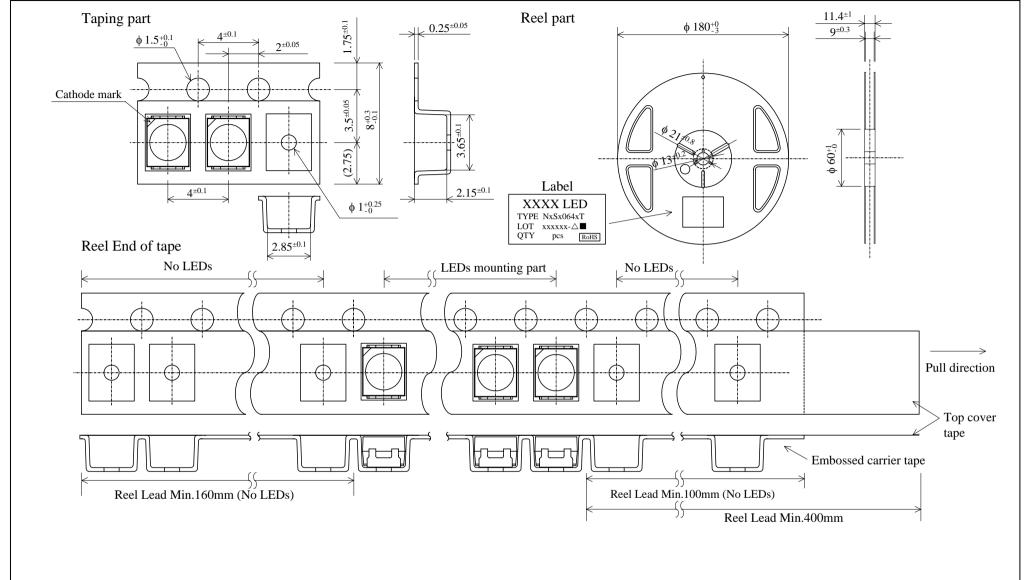


Taping is based on the **JIS C 0806**: Packaging of Electronic Components on Continuous Tapes.

2,000pcs/Reel

NICHIA CORPORATION

		Nichia
Model	NxSx064xT	Unit Cart ST
Title	TAPING DIMENSIONS	No.0806   Scale   Sc
No.	080510816181	Allow 52073

The reel and moisture absorbent material are put in the moisture proof foil bag and then heat sealed.

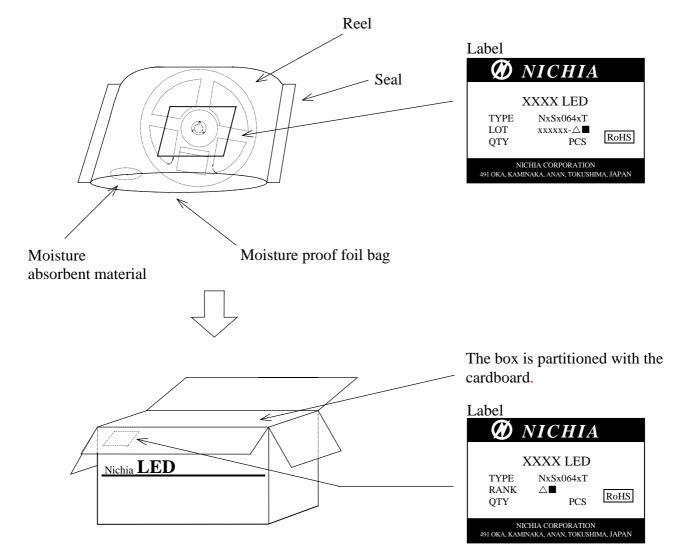

Packing unit

	Reel/bag	Quantity/bag (pcs)
Moisture proof foil bag	1reel	2,000 MAX.

Cardboard box	Dimensions (mm)	Reel/box	Quantity/box (pcs)
Cardboard box S	291×237×120×8t	7reel MAX.	14,000 MAX.
Cardboard box M	259×247×243×5t	15reel MAX.	30,000 MAX.
Cardboard box L	444×262×259×8t	30reel MAX.	60,000 MAX.

	Model	NxSx064xT	
NICHIA CORPORATION	Title	PACKING	
	No.	070802651612	