SPECIFICATIONS FOR NICHIA CHIP TYPE **RED** LED MODEL : **NSSR426CT**

NICHIA CORPORATION

 $(Ta=25^{\circ}C)$

1.SPECIFICATIONS

|) Absolute Maximum Ratings | | | (Ta=25°C) |
|----------------------------|--------|--------------------------|------------|
| Item | Symbol | Absolute Maximum Rating | Unit |
| Forward Current | IF | 50 | mA |
| Pulse Forward Current | IFP | 200 | mA |
| Reverse Voltage | VR | 5 | V |
| Power Dissipation | Pd | 120 | mW |
| Operating Temperature | Topr | $-30 \sim + 85$ | °C |
| Storage Temperature | Tstg | $-40 \sim +100$ | °C |
| Soldering Temperature | Tsld | Reflow Soldering : 260°C | for 10sec. |
| | | Hand Soldering : 350°C | for 3sec. |

IFP Conditions : Pulse Width ≤ 10 msec. and Duty $\leq 1/10$

(2) Initial Electrical/Optical Characteristics

| (14 20 C | | | | | | | |
|-------------------------|---|--------|-----------|-------|------|------|--|
| Item | | Symbol | Condition | Тур. | Max. | Unit | |
| Forward Voltage | | VF | IF=20[mA] | (1.9) | 2.4 | V | |
| Reverse Current | | Ir | VR=5[V] | - | 50 | μΑ | |
| Luminous Intensity | | Iv | IF=20[mA] | (250) | - | mcd | |
| | | - | IF=20[mA] | 0.691 | - | - | |
| Chromaticity Coordinate | у | - | IF=20[mA] | 0.308 | - | - | |

* Please refer to CIE 1931 chromaticity diagram.

| (3 |) Ranking | | | | | Γ) | Ca=25°C) |
|----|--------------------|--------|--------|-----------|------|------|----------|
| | Item | | Symbol | Condition | Min. | Max. | Unit |
| | | Rank T | Iv | IF=20[mA] | 300 | 420 | mcd |
| | Luminous Intensity | Rank S | Iv | IF=20[mA] | 210 | 300 | mcd |
| | | Rank R | Iv | IF=20[mA] | 150 | 210 | mcd |

* Luminous Intensity Measurement allowance is $\pm 10\%$.

| Col | or R | ank | (I | =20mA,Ta=25°C) | | |
|-----|------|--------|------|----------------|------|--|
| | | Rank R | | | | |
| 2 | X | 0.67 | 0.67 | 0.73 | 0.73 | |
| | у | 0.27 | 0.33 | 0.33 | 0.27 | |

* Color Coordinates Measurement allowance is ± 0.01 .

* One delivery will include up to one color rank and three luminous intensity ranks of the products. The quantity-ratio of the ranks is decided by Nichia.

2.TYPICAL INITIAL OPTICAL/ELECTRICAL CHARACTERISTICS Please refer to figure's page.

3.OUTLINE DIMENSIONS AND MATERIALS

Please refer to figure's page.

| 0 - F | 0 | | |
|-----------------------|-----------------------------|---|-------------------------|
| Material as follows ; | Package | : | Heat-Resistant Polymer |
| | Package Upper Surface Color | : | Black |
| | Encapsulating Resin | : | Epoxy Resin (Diffused) |
| | Resin Color | : | Red (Diffused) |
| | Electrodes | : | Ag Plating Copper Alloy |
| | | | |

4.PACKAGING

· The LEDs are packed in cardboard boxes after taping.

Please refer to figure's page.

The label on the minimum packing unit shows ; Part Number, Lot Number, Ranking, Quantity

- \cdot In order to protect the LEDs from mechanical shock, we pack them in cardboard boxes for transportation.
- The LEDs may be damaged if the boxes are dropped or receive a strong impact against them, so precautions must be taken to prevent any damage.
- · The boxes are not water resistant and therefore must be kept away from water and moisture.
- \cdot When the LEDs are transported, we recommend that you use the same packing method as Nichia.

5.LOT NUMBER

The first six digits number shows lot number.

The lot number is composed of the following characters;

 $\bigcirc \Box \times \times \times \times \text{ - } \bigtriangleup \blacksquare$

O - Year (4 for 2004, 5 for 2005)

- \Box Month (1 for Jan., 9 for Sep., A for Oct., B for Nov.)
- $\times \times \times \times$ Nichia's Product Number
 - \triangle Ranking by Color Coordinates
 - Ranking by Luminous Intensity

6.RELIABILITY (1) TEST ITEMS AND RESULTS

| | Standard | | | Number of |
|-----------------------------|---------------|--|------------|-----------|
| Test Item | Test Method | Test Conditions | Note | Damaged |
| Resistance to | JEITA ED-4701 | Tsld=260°C, 10sec. | 2 times | 0/100 |
| Soldering Heat | 300 301 | (Pre treatment 30°C,70%,168hrs.) | | |
| (Reflow Soldering) | | | | |
| Thermal Shock | JEITA ED-4701 | $0^{\circ}C \sim 100^{\circ}C$ | 100 cycles | 0/100 |
| | 300 307 | 15sec. 15sec. | | |
| Temperature Cycle | JEITA ED-4701 | $-40^{\circ}\mathrm{C} \sim 25^{\circ}\mathrm{C} \sim 100^{\circ}\mathrm{C} \sim 25^{\circ}\mathrm{C}$ | 100 cycles | 0/100 |
| | 100 105 | 30min. 5min. 30min. 5min. | | |
| Moisture Resistance Cyclic | JEITA ED-4701 | $25^{\circ}C \sim 65^{\circ}C \sim -10^{\circ}C$ | 10 cycles | 0/100 |
| | 200 203 | 90%RH 24hrs./1cycle | | |
| High Temperature Storage | JEITA ED-4701 | Ta=100°C | 1000 hrs. | 0/100 |
| | 200 201 | | | |
| Temperature Humidity | JEITA ED-4701 | Ta=60°C, RH=90% | 1000 hrs. | 0/100 |
| Storage | 100 103 | | | |
| Low Temperature Storage | JEITA ED-4701 | Ta=-40°C | 1000 hrs. | 0/100 |
| | 200 202 | | | |
| Steady State Operating Life | | Ta=25°C, IF=50mA | 1000 hrs. | 0/100 |
| | | | | |
| Steady State Operating Life | | 60°C, RH=90%, IF=20mA | 500 hrs. | 0/100 |
| of High Humidity Heat | | | | |
| Steady State Operating Life | | Ta=-30°C, IF=20mA | 1000 hrs. | 0/100 |
| of Low Temperature | | | | |

(2) CRITERIA FOR JUDGING THE DAMAGE

| | | | Criteria for Judgement | | | |
|--------------------|--------|--------------------|------------------------|-----------------------|--|--|
| Item | Symbol | Test Conditions | Min. | Max. | | |
| Forward Voltage | VF | IF=20mA | - | U.S.L.*)× 1.1 | | |
| Reverse Current | Ir | V _R =5V | - | U.S.L.*) \times 2.0 | | |
| Luminous Intensity | Iv | IF=20mA | L.S.L.**) \times 0.7 | - | | |
| | | | | | | |

*) U.S.L.: Upper Standard Level **) L.S.L.: Lower Standard Level

7.CAUTIONS

(1) Moisture Proof Package

• When moisture is absorbed into the SMT package it may vaporize and expand during soldering. There is a possibility that this can cause exfoliation of the contacts and damage to the optical characteristics of the LEDs. For this reason, the moisture proof package is used to keep moisture to a minimum in the package.

• The moisture proof package is made of an aluminum moisture proof bag with a zipper. A package of a moisture absorbent material (silica gel) is inserted into the aluminum moisture proof bag. The silica gel changes its color from blue to pink as it absorbs moisture.

(2) Storage

· Storage Conditions

Before opening the package :

The LEDs should be kept at 30°C or less and 90%RH or less. The LEDs should be used within a year. When storing the LEDs, moisture proof packaging with absorbent material (silica gel) is recommended.

After opening the package :

The LEDs should be kept at 30°C or less and 70%RH or less. The LEDs should be soldered within 168 hours (7days) after opening the package. If unused LEDs remain, they should be stored in moisture proof packages, such as sealed containers with packages of moisture absorbent material (silica gel). It is also recommended to return the LEDs to the original moisture proof bag and to reseal the moisture proof bag again.

• If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : more than 24 hours at $65 \pm 5^{\circ}$ C

- Nichia LED electrode sections are comprised of a silver plated copper alloy. The silver surface may be affected by environments which contain corrosive gases and so on. Please avoid conditions which may cause the LED to corrode, tarnish or discolor. This corrosion or discoloration may cause difficulty during soldering operations. It is recommended that the User use the LEDs as soon as possible.
- Please avoid rapid transitions in ambient temperature, especially in high humidity environments where condensation can occur.

(3) Heat Generation

• Thermal design of the end product is of paramount importance. Please consider the heat generation of the LED when making the system design. The coefficient of temperature increase per input electric power is affected by the thermal resistance of the circuit board and density of LED placement on the board, as well as other components. It is necessary to avoid intense heat generation and operate within the maximum ratings given in this specification.

 \cdot The operating current should be decided after considering the ambient maximum temperature of LEDs.

(4) Soldering Conditions

• The LEDs can be soldered in place using the reflow soldering method. Nichia cannot make a guarantee on the LEDs after they have been assembled using the dip soldering method.


· Recommended soldering conditions


| Reflow Soldering | | | Hand Soldering | |
|-----------------------------|--|---|----------------|-----------------|
| | Lead Solder | Lead-free Solder | | |
| Pre-heat | 120 ~ 150°C | 180 ~ 200°C | Temperature | 350°C Max. |
| Pre-heat time | 120 sec. Max. | 120 sec. Max. | Soldering time | 3 sec. Max. |
| Peak temperature | 240°C Max. | 260°C Max. | | (one time only) |
| Soldering time Condition | 10 sec. Max. refer to Temperature - profile ①. | 10 sec. Max. refer to Temperature - profile ②. (N ₂ reflow is recommended.) | | |

* After reflow soldering rapid cooling should be avoided.

[Temperature-profile (Surface of circuit board)]


Use the following conditions shown to the under figure.

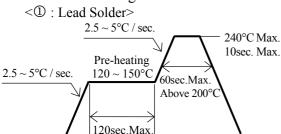

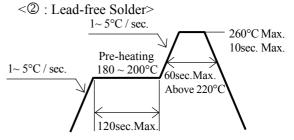

[Recommended soldering pad design]

Use the following conditions shown in the figure.

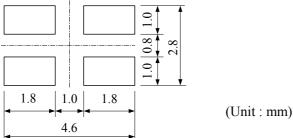


• Occasionally there is a brightness decrease caused by the influence of heat or ambient atmosphere during air reflow. It is recommended that the User use the nitrogen reflow method.


- Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.
- \cdot Reflow soldering should not be done more than two times.
- \cdot When soldering, do not put stress on the LEDs during heating.
- · After soldering, do not warp the circuit board.
- (5) Cleaning
 - It is recommended that isopropyl alcohol be used as a solvent for cleaning the LEDs. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not. Freon solvents should not be used to clean the LEDs because of worldwide regulations.
 - Do not clean the LEDs by the ultrasonic. When it is absolutely necessary, the influence of ultrasonic cleaning on the LEDs depends on factors such as ultrasonic power and the assembled condition. Before cleaning, a pre-test should be done to confirm whether any damage to the LEDs will occur.

(6) Others

- \cdot Care must be taken to ensure that the reverse voltage will not exceed the absolute maximum rating when using the LEDs with matrix drive.
- \cdot The LED light output is strong enough to injure human eyes. Precautions must be taken to prevent looking directly at the LEDs with unaided eyes for more than a few seconds.
- Flashing lights have been known to cause discomfort in people; you can prevent this by taking precautions during use. Also, people should be cautious when using equipment that has had LEDs incorporated into it.
- The LEDs described in this brochure are intended to be used for ordinary electronic equipment (such as office equipment, communications equipment, measurement instruments and household appliances). Consult Nichia's sales staff in advance for information on the applications in which exceptional quality and reliability are required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as for airplanes, aerospace, submersible repeaters, nuclear reactor control systems, automobiles, traffic control equipment, life support systems and safety devices).
- User shall not reverse engineer by disassembling or analysis of the LEDs without having prior written consent from Nichia. When defective LEDs are found, the User shall inform Nichia directly before disassembling or analysis.
- · The formal specifications must be exchanged and signed by both parties before large volume purchase begins.
- · The appearance and specifications of the product may be modified for improvement without notice.

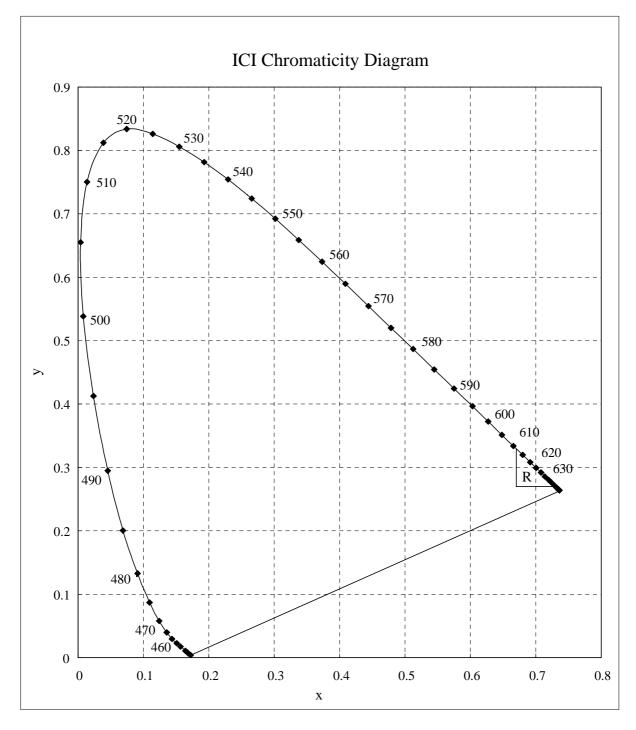


* Color Coordinates Measurement allowance is ± 0.01 .

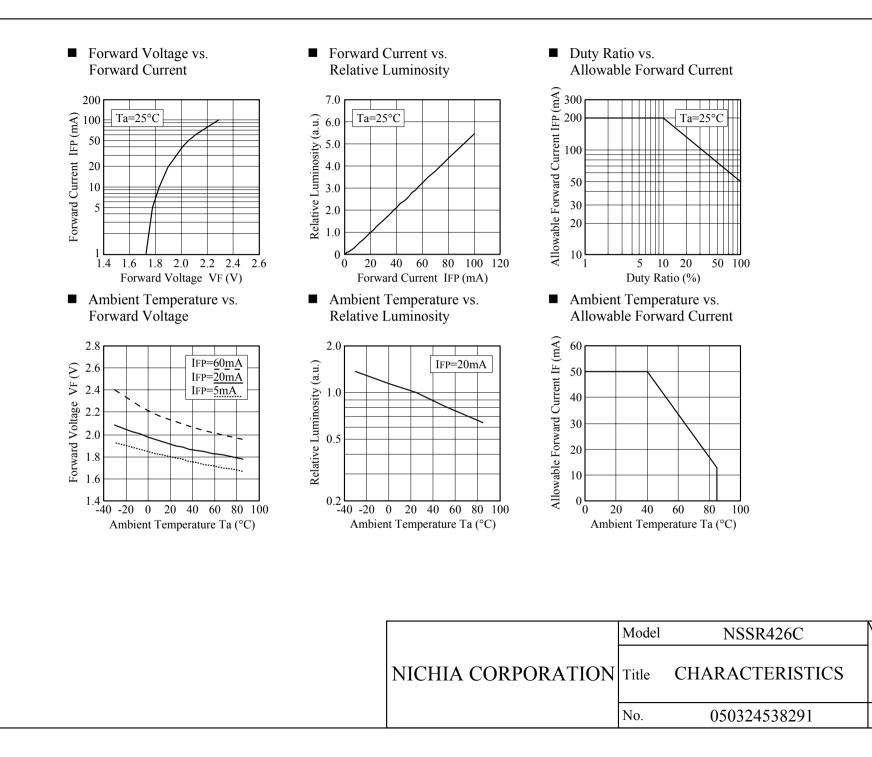

 Ambient Temperature vs. Chromaticity Coordinate (λD)


■ Spectrum

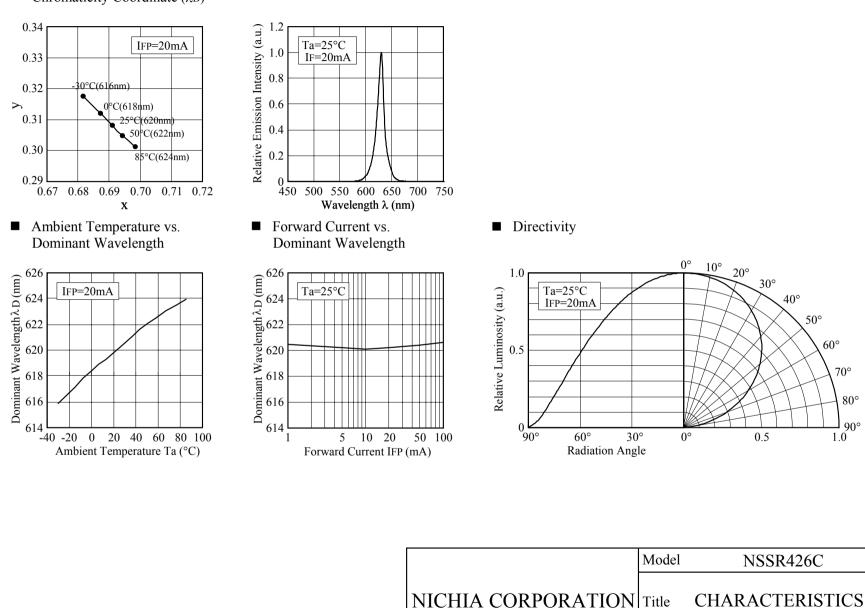

Nichia STSE-CC5043A <Cat.No.050408>


050324538301

No.

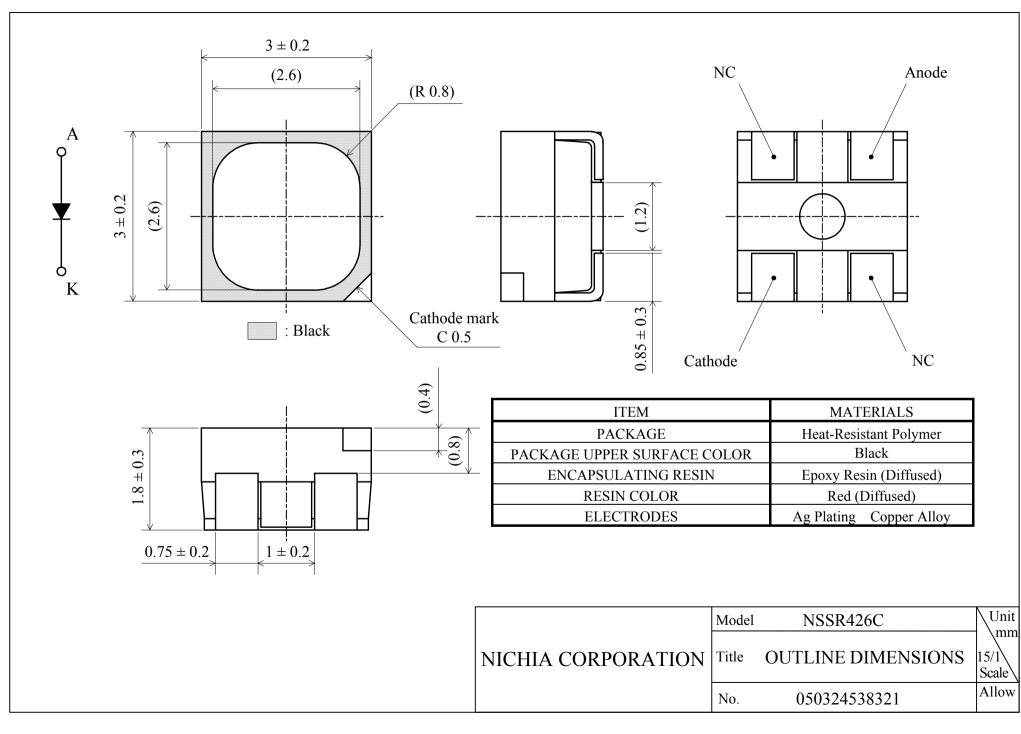

Nichia STSE-CC5043A <Cat.No.050408>

-10-

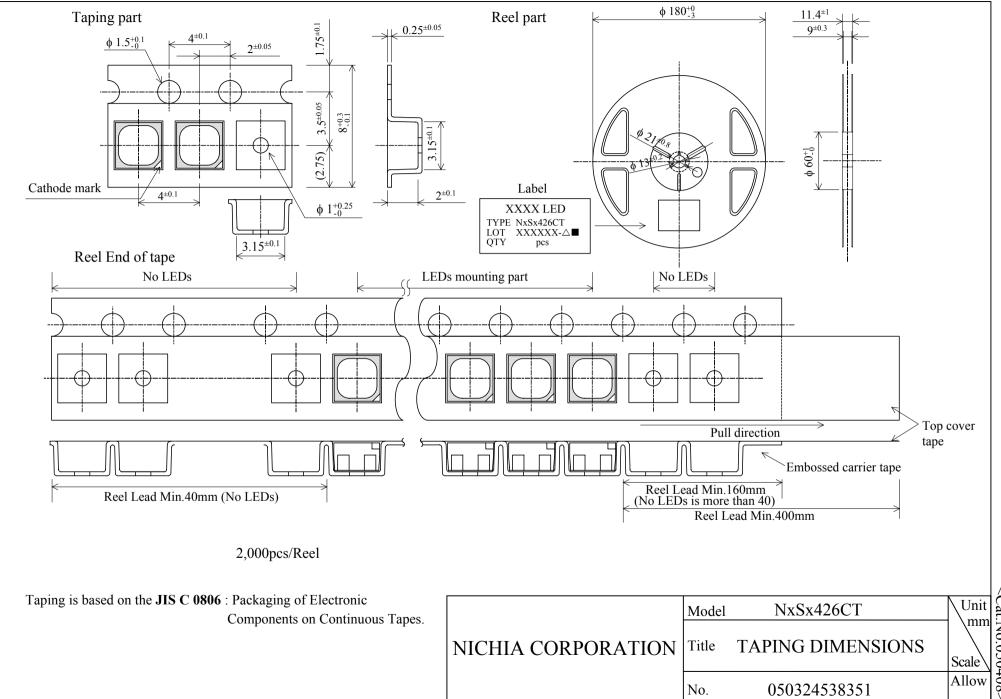

-11-

Nichia STSE-CC5043A <Cat.No.050408>

