

Cooled Large Area 5mm Blue Enhanced Silicon APD Module SD 197-70-74-661



FEATURES Low noise

Small size

· High sensitivity

DESCRIPTION

The SD 197-70-74-661 module Incorporates a Blue Enhanced 5mm cooled APD, TEC controller, HV supply, and two stage preamplifier, in a small package.

APPLICATIONS

- Industrial
- Medical

ABSOLUT	SOLUTE MAXIMUM RATING* (TA)= 23°C UNLESS OTHERWISE NOTED						
SYMBOL	PARAMETER	MIN	MAX	UNITS		WIRE	
+/- 12 V _S	Voltago Supplico	+/-11	+/-13	v			
+5 V _S	Voltage Supplies	+4.75	+5.25	v		Ģ	
T _{STG}	Storage Temperature	-40	+70	°C		E	
To	Operating Temperature	0	+40	°C		E	
J		1		II		0	

*All specifications apply when APD is at 0°C with a gain of 300 and a load resistance of 50 ohms.

Typical HV divider Ratio and voltage gain is 404. Recommended load on amplifier output is from 50ohms to 1Mohm.

Devices must be mounted to a heat sink with TEC on.

**To activate the external bias control (blue wire), turn the gain adjust fully counter clockwise and place a jumper across J1 the external bias select connector. Input voltage on blue wire 0 to 5 volts. The module must be operated with a heat sink.

ELECTRIC WIRING TABLE


WIRE COLOR	ITEM				
Red	+12V				
Green	GND				
Black	-12V				
Blue**	External Bias Adjust Input				
Orange	HV Monitor				
Violet	Temperature Monitor				
Gray	Temperature Monitor GND				
Yellow	+5V				
White	GND for +5V Supply				

*ELECTRO-OPTICAL CHARACTERISTICS RATING (TA)= 23°C UNLESS OTHERWISE NOTED

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	ТҮР	MAX	UNITS	
١ _s	Current Supply	+12V supply	120		220	mA	
		-12V supply	30		50		
		+5V supply	0.8		1.9		
V _{os}	Output Offset			±1	±5	mV	
λ range	Spectral Application Range	Spot Scan	350		1050	nm	
S	Sensitivity	f = 1MHz, λ = 500nm		9.5		10 ⁵ V/W	
NEP	Noise Equivalent Power	f = 1MHz, λ = 500nm		7.1 x10 ⁻¹⁵		W/ $\sqrt{_{\rm Hz}}$	
Ro	Output resistance			50		ohms	
f _{cut}	High Cutoff Frequency	λ = 675 nm	12	14		MHz	

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.



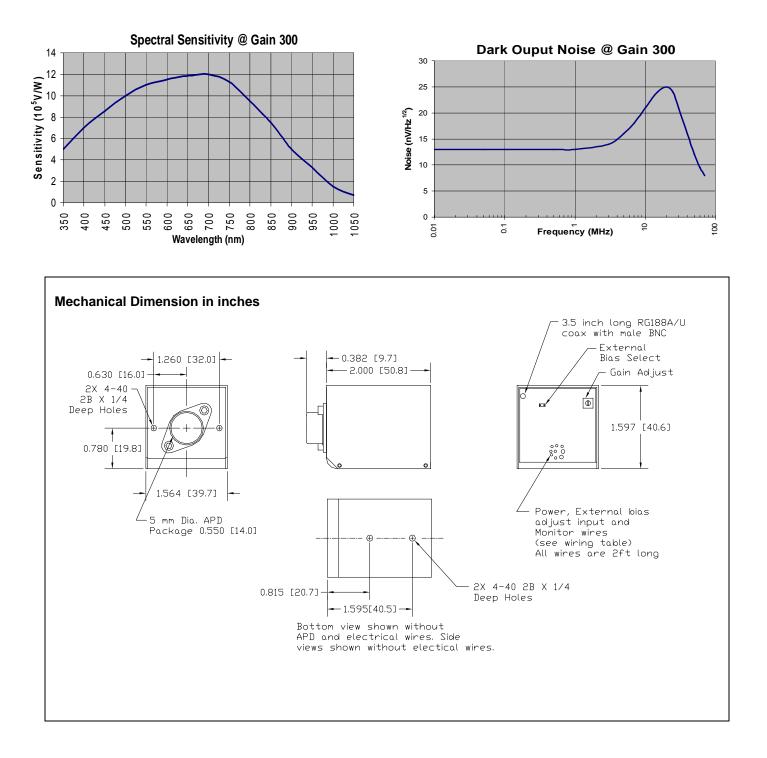

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.