

SEMICONDUCTOR

200mW SOD-523 SURFACE MOUNT Very Small Outline Flat Lead Plastic Package General Purpose Application Fast Switching Diode

Absolute Maximum Ratings T_A = 25°C unless otherwise noted

Absolute Maximum Natings 14 - 25 C unless otherwise noted							
Symbol	Parameter	Value	Units				
P _D	Power Dissipation	200	mW				
T _{STG}	Storage Temperature Range	-55 to +150	°C				
TJ	Operating Junction Temperature	+150	°C				
V_{RSM}	Non-Repetitive Peak Reverse Voltage	100	٧				
V_{RRM}	Repetitive Peak Reverse Voltage	75	٧				
I _{FRM}	Repetitive Peak Forward Current	300	mA				
lo	Continuous Forward Current	150	mA				

These ratings are limiting values above which the serviceability of the diode may be impaired.

SOD-523 Flat Lead Cathode Anode

Specification Features:

- Fast Switching Device (T_{RR} < 4.0 nS)
- General Purpose Diodes
- Extremely Small SOD-523 Package
- Flat Lead SOD-523 Small Outline Plastic Package
- Surface Device Type Mounting
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish
- Band Indicates Cathode

DEVICE MARKING CODE:

Device Type		Device Marking	
	TC1N4148WT	E1	
	TC1N4448WT	E2	
	TC1N914BWT	E3	


Electrical Characteristics T_A = 25°C unless otherwise noted

Symbol	Parameter		Test Condition	Limits		Unit	
				Min	Max	Unit	
B _V	Breakdown Voltage		I _R =100μA	100		Volto	
			I _R =5µA	75		Volts	
I _R	Reverse Leakage Current		V _R =20V		25	nA	
			V _R =75V		5	μΑ	
V _F	Forward Voltage	TC1N4448WT, TC1N914BWT	I _F =5mA	0.62	0.72		
		TC1N4148WT	I _F =10mA		1.0	Volts	
		TC1N4448WT, TC1N914BWT	I _F =100mA		1.0		
T _{RR}	Reverse Recovery Tim	e	I _F =10mA				
			I _R =60mA		4 -0		
			R _L =100Ω		4	nS	
			I _{RR} =1mA				
С	Capacitance		V _R =0V, f=1M _{HZ}		4	pF	




Typical Performance Characteristics


Total Capacitance

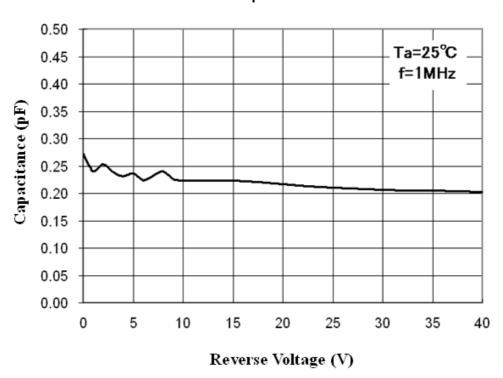


Forward Voltage vs Ambient Temperature

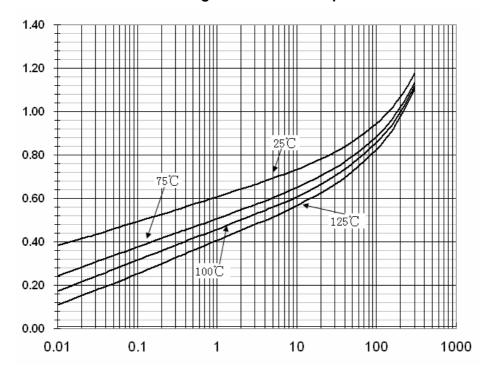



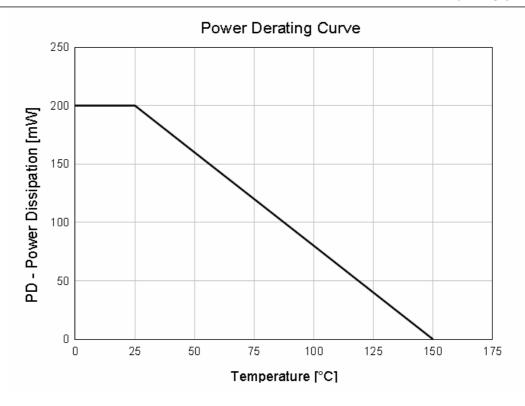


Reverse Current vs Reverse VoltageReverse

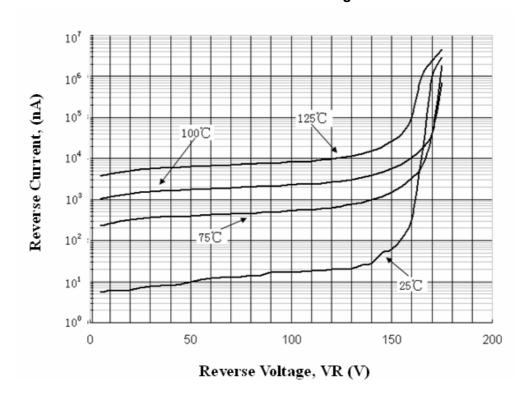



Flat Lead SOD-523 Package Outline

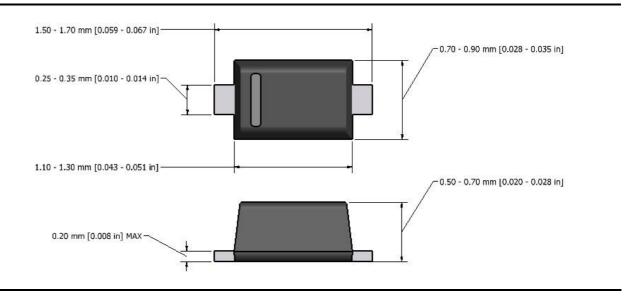

This datasheet presents technical data of Tak Cheong's Switching Diodes. Complete specifications for the individual devices are provided in the form of datasheets. A comprehensive Selector Guide is included to simplify the task of choosing the best set of components required for a specific application. For additional information, please visit our website http://www.takcheong.com.

Although information in this datasheet has been carefully checked, no responsibility for the inaccuracies can be assumed by Tak Cheong. Please consult your nearest Tak Cheong's sales office for further assistance.

Tak Cheong reserves the right to make changes without further notice to any products herein to further improve reliability, function or design, cost and productivity.

TAK CHEONG and are registered trademarks of Tak Cheong Electronics (Holdings) Co., Ltd.