

Technical Data Sheet

TOP View LEDs With Black Surface

67-01/YSC-HT2U1B/2T

Features

- P-LCC-2 package.
- White package with black top surface.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions

• The 67-01 series is available in soft orange, green,blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- OA Equipment
- Backlighting of Full Color LCD
- Automotive Equipment
- Replacement of Conventional Light Bulbs and Fluorescent Lamps

Device Selection Guide

	Resin Color	
Material	Emitted Color	Resili Color
AlGalnP	Brilliant Yellow	Water Clear




Everlight Electronics Co., Ltd. Device No. :DES-671-B13 http://www.everlight.com prepared date:16-Feb-2007 Rev. 1 Page: 1 of 10 Prepared by: Josh Chou



67-01/YSC-HT2U1B/2T

Package Outline Dimensions

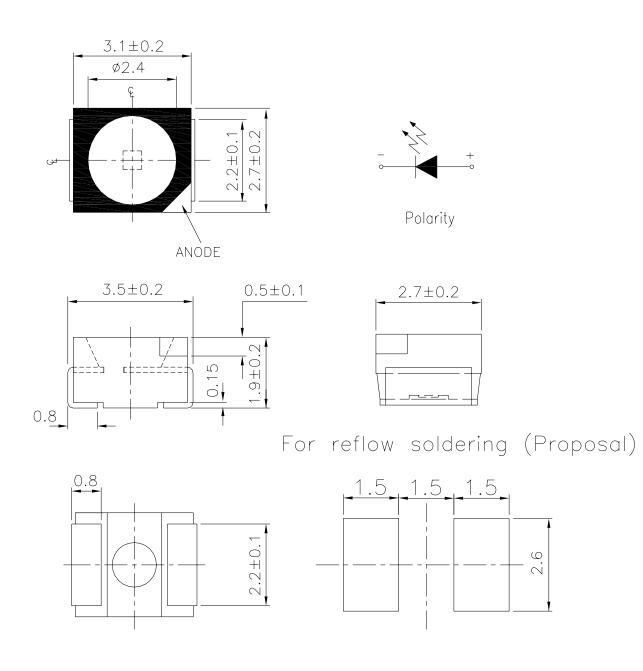

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Everlight Electronics Co., Ltd. Device No. :DES-671-B13 http://www.everlight.com prepared date:16-Feb-2007 Rev. 1 Page: 2 of 10 Prepared by: Josh Chou

67-01/YSC-HT2U1B/2T

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	IF	50	mA
Peak Forward Current (Duty 1/10 @ 1KHz)	Ifp	100	mA
Power Dissipation	Pd	120	mW
Electrostatic Discharge(HBM)	ESD	2000	V
Operating Temperature	Topr	-40 ~ +100	°C
Storage Temperature	Tstg	-40~ +110	°C
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.	

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	360		565	mcd	IF=20mA
Viewing Angle	201/2		120		deg	IF=20mA
Peak Wavelength	λp		591		nm	IF=20mA
Dominant Wavelength	λd	588		594	nm	IF=20mA
Spectrum Radiation Bandwidth	Δλ		20		nm	IF=20mA
Forward Voltage	\mathbf{V}_{F}	1.75		2.35	V	IF=20mA
Reverse Current	Ir			10	μΑ	V _R =5V

Notes:

1. Tolerance of Luminous Intensity $\pm 11\%$

2.Tolerance of Dominant Wavelength ±1nm

3. Tolerance of Forward Voltage $\pm 0.1 V$



67-01/YSC-HT2U1B/2T

Bin Range Of Dominant Wavelength

Group	Bin Code	Min.	Max.	Unit	Condition
Н	DD2	588	590		IF=20mA
	DD3	590	592	nm	
	DD4	592	594		

Bin Rang Of Luminous Intensity

8				
Bin	Min	Max	Unit	Condition
Τ2	360	450		IF=20mA
U1	450	565	mcd	

Bin Rang Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition
В	0	1.75	1.95		IF=20mA
	1	1.95	2.15	V	
	2	2.15	2.35		

Notes:

1. Tolerance of Luminous Intensity $\pm 11\%$

2. Tolerance of Dominant Wavelength ± 1 nm


3.Tolerance of Forward Voltage $\pm 0.1V$

EVERLIGHT

EVERLIGHT ELECTRONICS CO.,LTD.

67-01/YSC-HT2U1B/2T

Typical Electro-Optical Characteristics Curves

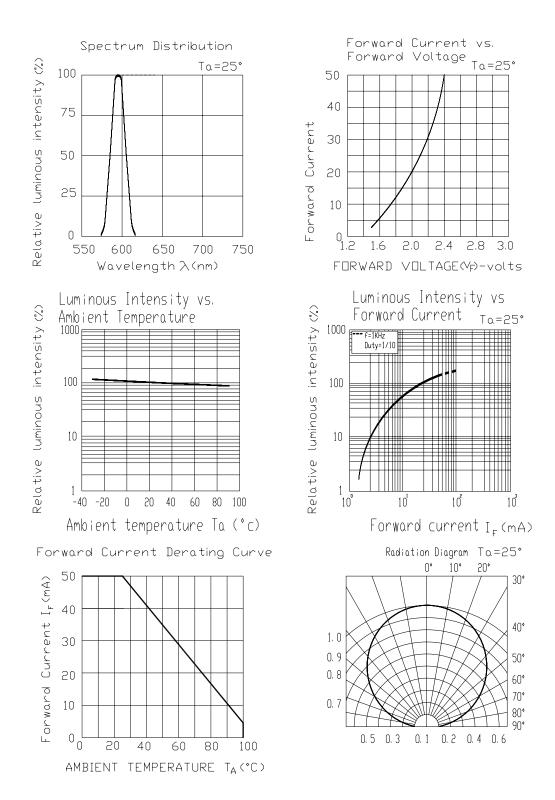

Everlight Electronics Co., Ltd. Device No. :DES-671-B13 http://www.everlight.com prepared date:16-Feb-2007 Rev. 1 Page: 5 of 10 Prepared by: Josh Chou




67-01/YSC-HT2U1B/2T


Label explanation

CAT: Luminous Intensity Rank

- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



Reel Dimensions

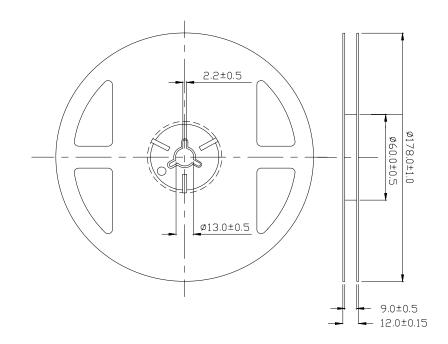


Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Everlight Electronics Co., Ltd. Device No. :DES-671-B13 http://www.everlight.com prepared date:16-Feb-2007 Rev. 1 Page: 6 of 10 Prepared by: Josh Chou

67-01/YSC-HT2U1B/2T


Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

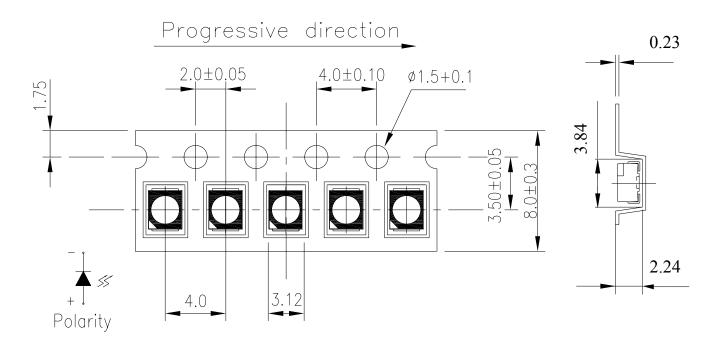

Note: The tolerances unless mentioned is ± 0.1 mm Unit = mm

Moisture Resistant Packaging

EVERLIGH

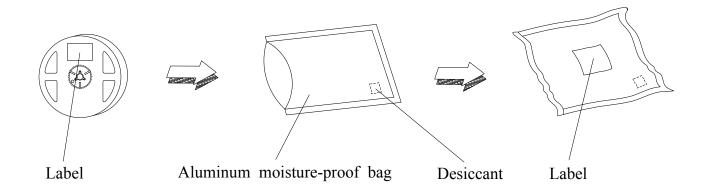

Everlight Electronics Co., Ltd. Device No. :DES-671-B13 http://www.everlight.com prepared date:16-Feb-2007 Rev. 1 Page: 7 of 10 Prepared by: Josh Chou

EVERLIGHT

EVERLIGHT ELECTRONICS CO.,LTD.

67-01/YSC-HT2U1B/2T

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_{\rm F} = 20 \text{ mA} / 25 ^{\circ}{\rm C}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 PCS.	0/1

EVERLIGHT ELECTRONICS CO.,LTD. 67-01/YSC-HT2U1B/2T


Precautions For Use

1. Over-current-proof

ERLIG

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile

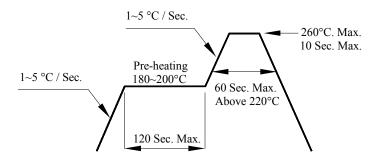

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.


4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

EVERLIGHT EVERLIGHT ELECTRONICS CO.,LTD. <u>67-01/YSC-HT2U1B/2T</u>

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

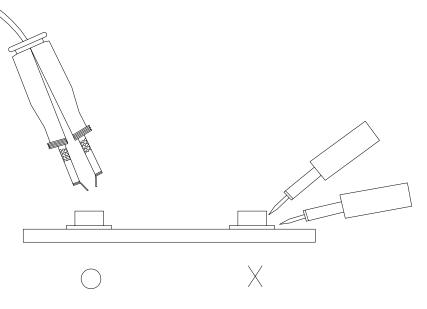

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. :DES-671-B13 http://www.everlight.com prepared date:16-Feb-2007 Rev. 1 Page: 10 of 10 Prepared by: Josh Chou