



## ■ Features :


- Meet 1U rack mount system
- Universal AC input / Full range
- Active power factor ≥94%
- Protections:Short circuit/Overload/Over voltage
- Forced air cooling by built-in DC fan
- With power good and fail signal output
- Built-in remote ON-OFF control
- Remote DC sense +5V and +3.3V
- With +5VSB:0 ~ 2.0A max.
- 100% full load burn-in test
- High efficiency
- 2 years warranty



MODEL		IPC-200						
	OUTPUT NUMBER	CH1	CH2	CH3	CH4	CH5	STANDBY	
	DC VOLTAGE	3.3V	5V	12V	-5V	-12V	5VSB	
OUTPUT	RATED CURRENT	15A	25A	13A	0.5A	1A	2A	
	CURRENT RANGE	0 ~ 15A	1 ~ 25A	1 ~ 13A	0 ~ 0.5A	0.1 ~ 1A	0 ~ 2A	
	RATED POWER		1	1		1		
		200W continue. Combine power max.:+5V,+3.3V,+12V output shall not exceed 180W max. (The +5 & +3.3Volt combine total output shall not exceed 15 (The -5 & -12Volt combine total output shall not exceed 12W)						
	RIPPLE & NOISE (max.) Note.2	,	50mVp-p	120mVp-p	100mVp-p	120mVp-p	50mVp-p	
	VOLTAGE ADJ. RANGE	CH2: 5.05 ~ 5.5V					, , ,	
	VOLTAGE TOLERANCE Note.3	CH1:±5.0%	±5.0%	±7.0%	±8.0%	±10%	±5.0%	
	LINE REGULATION	±1.0%	±1.0%	±1.0%	±2.0%	±2.0%	±1.0%	
	LOAD REGULATION	±5.0%	±5.0%	±7.0%	±8.0%	±10%	±5.0%	
	SETUP, RISE TIME	800ms, 20ms/230VAC 2500ms, 20ms/115VAC at full load						
	HOLD TIME (Typ.)	16ms/230VAC 16ms/115VAC at full load						
INPUT	VOLTAGE RANGE	90 ~ 264VAC						
	FREQUENCY RANGE	47 ~ 63Hz						
	EFFICIENCY (Typ.)	75%						
	AC CURRENT (Typ.)	3.5A/115VAC 1.7A/230VAC						
	INRUSH CURRENT (Typ.)	40A/115VAC 80A/230VAC						
	LEAKAGE CURRENT(max.)	3mA/240VAC						
PROTECTION	,	105 ~ 150% rated output power						
	OVER LOAD	Protection type: Shut down o/p voltage, re-power on to recover						
	OVED VOLTAGE	+3.3V, +5V: 110% ~ 140% of rated voltage; +12V:13.2V ~ 16V						
	OVER VOLTAGE	Protection type : Shut down o/p voltage, re-power on to recover						
	CHORT CIRCUIT	All output equipped with short circuit						
	SHORT CIRCUIT	Protection type : Shut down o/p voltage, re-power on to recover						
FUNCTION	POWER GOOD SIGNAL	The TTL compatible signal out with 100ms to 500ms delay after power set up						
	POWER FAIL SIGNAL	The TTL compatible signal will go down at least 1ms before +5V below 4.75V						
	PS-ON INPUT SIGNAL	Power off: PS-ON = "Hi" or ">2V"; Power on: PS-ON = "Low" or "<0.5V"						
ENVIRONMENT	WORKING TEMP.	-10 ~ +60°C (Refer to output load derating curve)						
	WORKING HUMIDITY	20 ~ 90% RH non-condensing						
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C 10 ~ 95% RH						
	TEMP. COEFFICIENT	±0.05% / °C (0 ~ 50°C)						
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes						
	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved						
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-FG:1.5KVAC						
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:50M Ohms/500VDC						
EMC (Note 4)	EMI CONDUCTION & RADIATION							
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3						
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024, EN61000-6-2 (EN50082-2), heavy industry level, criteria A						
	MTBF	94.1K hrs min. MIL-HDBK-217F (25℃)						
	CONNECTOR	ATX main power connector * 1ea; +12V power connector * 1ea						
		Peripheral power connector * 3ea; Floppy drive power connector * 1ea						
	COOLING		Forced air ventilation by 4cm DC fan					
	DIMENSION		240*83*40mm (L*W*H)					
	PACKING		1.44Kg; 10pcs/15.4Kg/0.89CUFT					
NOTE	<ul><li>2. Ripple &amp; noise are measure</li><li>3. Load regulation is measure</li></ul>	ully mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  ed at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  ed from 20% to 100% max. Load.  dered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets						

- The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.
- 5. Derating may be needed under low input voltages. Please check the derating curve for more details.




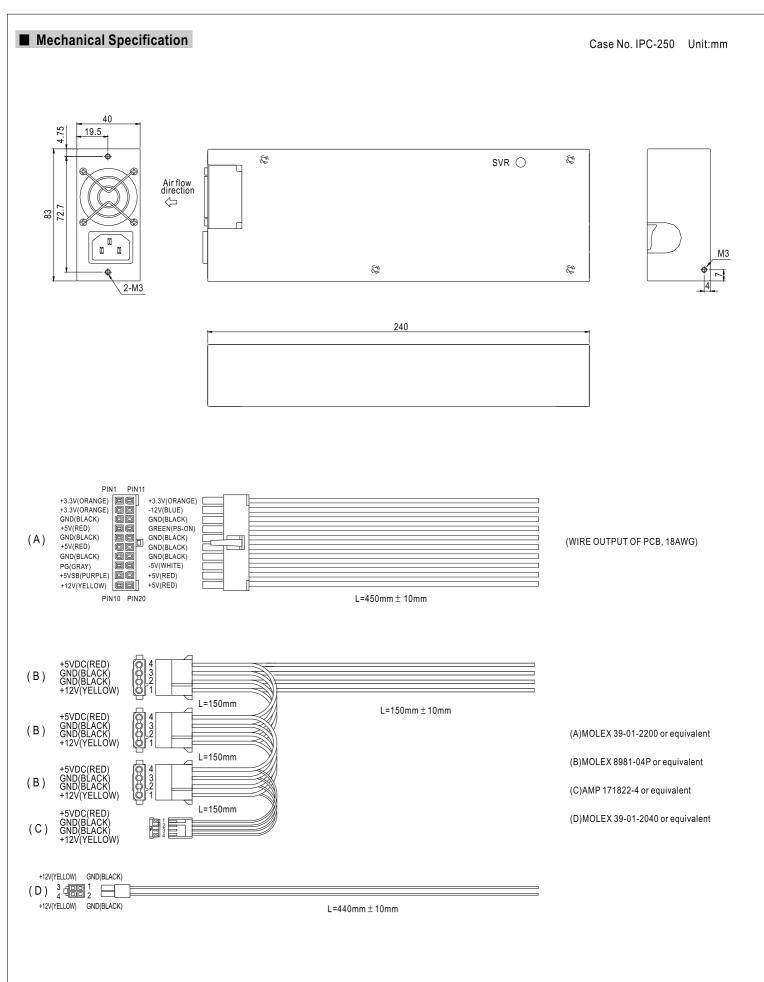



## **■** Block Diagram

fosc: 100KHz

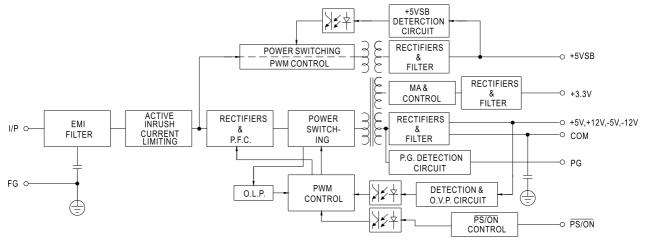

## ■ Derating Curve

## ■ Output Derating VS Input Voltage

