


# Lowpass Filter

KR Model  
2370


## Overall Amplitude

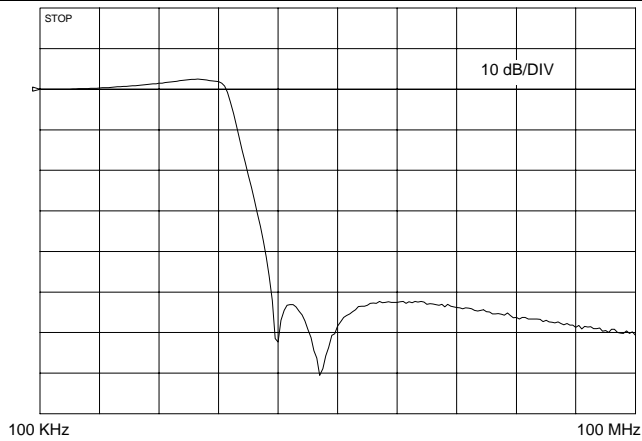

## Specifications

<b>KR Part Number</b>	<b>2370</b>
<b>Filter Type</b>	Lowpass with Sin(x)/x
<b>Insertion Loss</b>	< 4 dB
<b>End of Passband</b>	25 MHz
<b>Passband Ripple</b>	< 0.20 dB p-p
<b>Attenuation at 39 MHz</b>	> 47 dB
<b>Sampling Frequency</b>	64 MHz
<b>Source and Load Impedance</b>	50 $\Omega$

## Outline Drawing

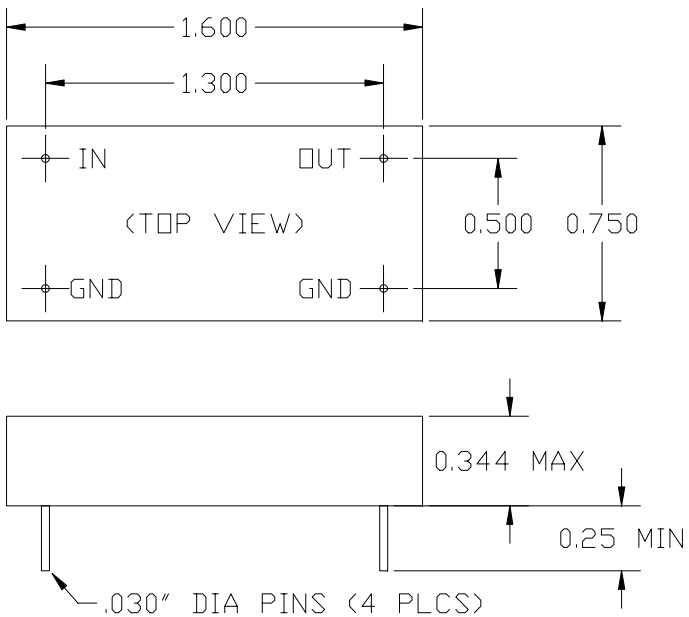

**KR Electronics**  
[www.krfilters.com](http://www.krfilters.com)  
 91 Avenel Street  
 Avenel, NJ 07001  
 732-636-1900

All dimensions in inches  
Metal Case