


Video Filter

KR Model
2396


Effective Passband & Group Delay

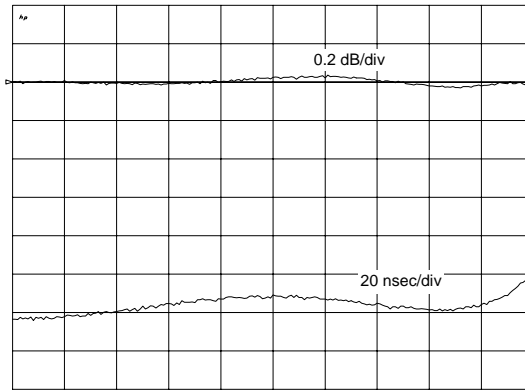

100 KHz

7 MHz

Overall Amplitude

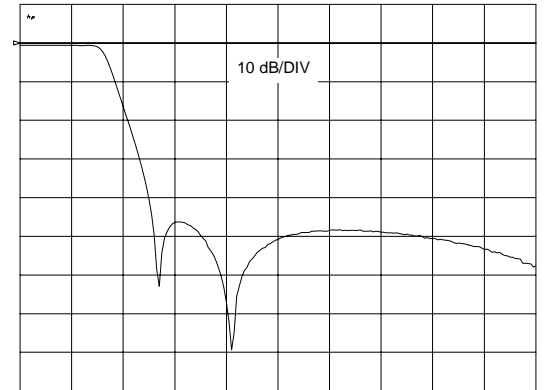


100 KHz

50 MHz

Specifications

KR Part Number	2396
Filter Type	Video Filter
Insertion Loss	< 1 dB
End of Passband	6.75 MHz
Passband Ripple	< 0.20 dB
Attenuation at 13.5 MHz	> 50 dB
Attenuation above 13.5 MHz	> 40 dB
Group Delay Ripple to 6.75 MHz	< 20 nsec
Insertion Delay	Approx 150 nsec
Source and Load Impedance	75 Ω

Outline Drawing

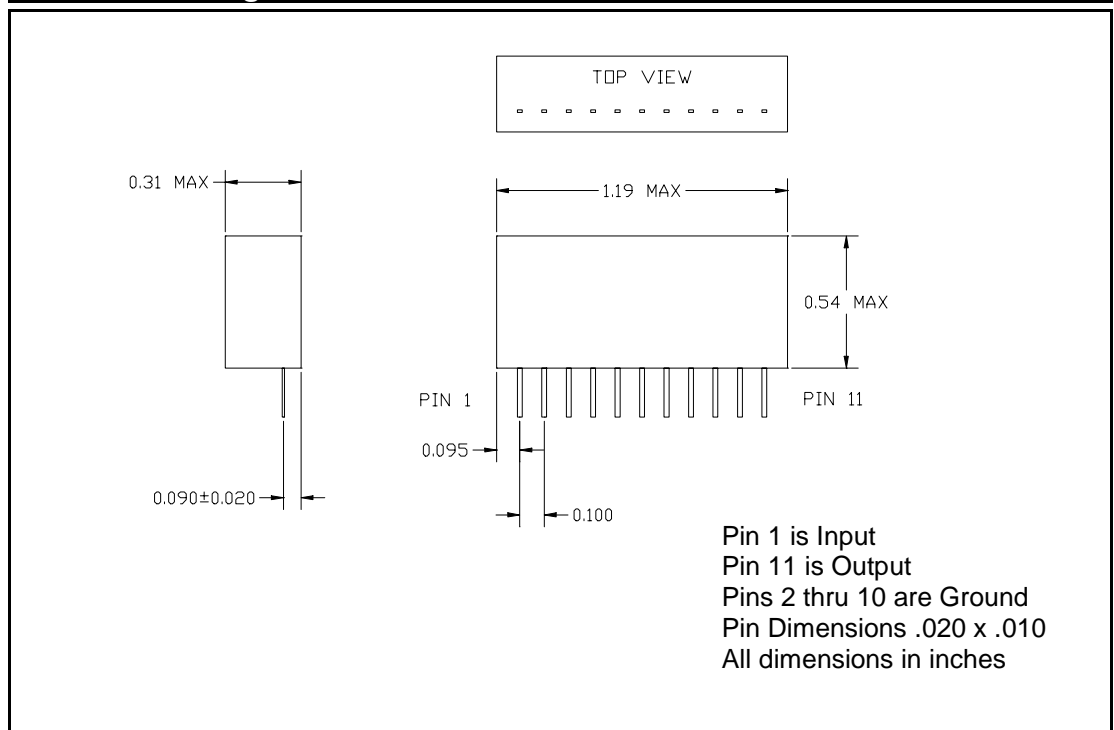

KR Electronics
91 Avenel Street
Avenel, NJ 07001