74LVC2G17

Dual non-inverting Schmitt trigger with 5 V tolerant input Rev. 04 — 9 October 2006 Product data

Product data sheet

1. **General description**

The 74LVC2G17 is a high-performance, low-power, low-voltage, Si-gate CMOS device and superior to most advanced CMOS compatible TTL families.

Inputs can be driven from either 3.3 V or 5 V devices. This feature allows the use of these devices as translators in a mixed 3.3 V and 5 V environment.

This device is fully specified for partial power-down applications using I_{OFF}. The I_{OFF} circuitry disables the output, preventing the damaging backflow current through the device when it is powered down.

The 74LVC2G17 provides two non-inverting buffers with Schmitt trigger action. It is capable of transforming slowly changing input signals into sharply defined, jitter-free output signals.

2. **Features**

- Wide supply voltage range from 1.65 V to 5.5 V
- 5 V tolerant input/output for interfacing with 5 V logic
- High noise immunity
- Complies with JEDEC standard:
 - JESD8-7 (1.65 V to 1.95 V)
 - ◆ JESD8-5 (2.3 V to 2.7 V)
 - ◆ JESD-8B/JESD36 (2.7 V to 3.6 V)
- ESD protection:
 - ◆ HBM JESD22-A114-D exceeds 2000 V
 - MM JESD22-A115-A exceeds 200 V
- \pm 24 mA output drive (V_{CC} = 3.0 V)
- CMOS low-power consumption
- Latch-up performance exceeds 250 mA
- Direct interface with TTL levels
- Multiple package options
- Specified from -40 °C to +85 °C and -40 °C to +125 °C

Applications

Wave and pulse shapers for highly noisy environments



Dual non-inverting Schmitt trigger with 5 V tolerant input

4. Ordering information

Table 1. Ordering information


Type number	Package						
	Temperature range	Name	Description	Version			
74LVC2G17GW	–40 °C to +125 °C	SC-88	plastic surface-mounted package; 6 leads	SOT363			
74LVC2G17GV	–40 °C to +125 °C	SC-74	plastic surface-mounted package (TSOP6); 6 leads	SOT457			
74LVC2G17GM	–40 °C to +125 °C	XSON6	plastic extremely thin small outline package; no leads; 6 terminals; body 1 \times 1.45 \times 0.5 mm	SOT886			
74LVC2G17GF	–40 °C to +125 °C	XSON6	plastic extremely thin small outline package; no leads; 6 terminals; body $1 \times 1 \times 0.5$ mm	SOT891			

5. Marking

Table 2. Marking codes

Type number	Marking code
74LVC2G17GW	VV
74LVC2G17GV	VV
74LVC2G17GM	VV
74LVC2G17GF	VV


6. Functional diagram

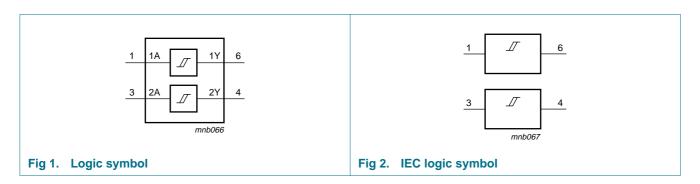

Dual non-inverting Schmitt trigger with 5 V tolerant input

7. Pinning information

7.1 Pinning

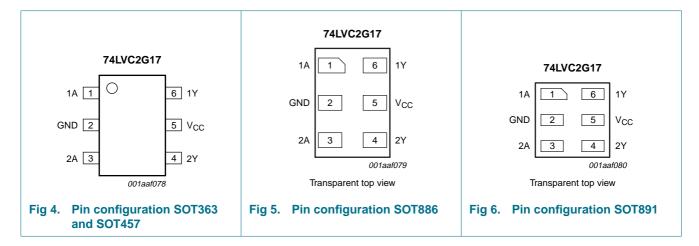

7.2 Pin description

Table 3. Pin description

Symbol	Pin	Description
1A	1	data input
GND	2	ground (0 V)
2A	3	data input
2Y	4	data output
V_{CC}	5	supply voltage
1Y	6	data input

8. Functional description

Table 4. Function table[1]

Input	Output
nA	nY
L	L
Н	Н

^[1] H = HIGH voltage level;

L = LOW voltage level.

Dual non-inverting Schmitt trigger with 5 V tolerant input

9. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		-0.5	+6.5	V
I _{IK}	input clamping current	V _I < 0 V	-	-50	mA
V_{I}	input voltage		[1] -0.5	+6.5	V
I _{OK}	output clamping current	V _O < 0 V	-	-50	mA
Vo	output voltage	Active mode	[1][2] -0.5	$V_{CC} + 0.5$	V
		Power-down mode	[1][2] -0.5	+6.5	V
lo	output current	$V_O = 0 V to V_{CC}$	-	±50	mA
I _{CC}	supply current		-	100	mA
I_{GND}	ground current		-	-100	mA
T _{stg}	storage temperature		-65	+150	°C
P _{tot}	total power dissipation	$T_{amb} = -40 ^{\circ}\text{C} \text{ to } +125 ^{\circ}\text{C}$	<u>[3]</u> -	300	mW

^[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

10. Recommended operating conditions

Table 6. Recommended operating conditions

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V_{CC}	supply voltage		1.65	-	5.5	V
V_{I}	input voltage		0	-	5.5	V
Vo	output voltage		0	-	V_{CC}	V
T _{amb}	ambient temperature		-40	-	+125	°C

11. Static characteristics

Table 7. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
T _{amb} = -	-40 °C to +85 °C <u>[1]</u>					
V _{OL}	LOW-level output voltage	$V_I = V_{IH}$ or V_{IL}				
		I_O = 100 $\mu A;~V_{CC}$ = 1.65 V to 5.5 V	-	-	0.1	V
		$I_O = 4 \text{ mA}; V_{CC} = 1.65 \text{ V}$	-	-	0.45	V
		$I_O = 8 \text{ mA}; V_{CC} = 2.3 \text{ V}$	-	-	0.3	V
		$I_O = 12 \text{ mA}; V_{CC} = 2.7 \text{ V}$	-	-	0.4	V
		$I_O = 24 \text{ mA}; V_{CC} = 3.0 \text{ V}$	-	-	0.55	V
		$I_O = 32 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	-	0.55	V

^[2] When $V_{CC} = 0 \text{ V}$ (Power-down mode), the output voltage can be 5.5 V in normal operation.

^[3] For SC-88 and SC-74 packages: above 87.5 °C the value of P_{tot} derates linearly with 4.0 mW/K. For XSON6 packages: above 45 °C the value of P_{tot} derates linearly with 2.4 mW/K.

Dual non-inverting Schmitt trigger with 5 V tolerant input

Table 7. Static characteristics ...continued
At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Тур	Max	Uni
V _{OH}	HIGH-level output voltage	$V_I = V_{IH}$ or V_{IL}				
		$I_{O} = -100 \mu A$; $V_{CC} = 1.65 \text{ V to } 5.5 \text{ V}$	V _{CC} - 0.1	-	-	V
		$I_O = -4 \text{ mA}; V_{CC} = 1.65 \text{ V}$	1.2	-	-	V
		$I_{O} = -8 \text{ mA}; V_{CC} = 2.3 \text{ V}$	1.9	-	-	V
		$I_{O} = -12 \text{ mA}; V_{CC} = 2.7 \text{ V}$	2.2	-	-	V
		$I_{O} = -24 \text{ mA}; V_{CC} = 3.0 \text{ V}$	2.3	-	-	V
		$I_{O} = -32 \text{ mA}; V_{CC} = 4.5 \text{ V}$	3.8	-	-	V
l _l	input leakage current	$V_{I} = 5.5 \text{ V or GND}; V_{CC} = 5.5 \text{ V}$	-	±0.1	±5	μΑ
I _{OFF}	power-off leakage current	V_{I} or $V_{O} = 5.5 \text{ V}$; $V_{CC} = 0 \text{ V}$	-	±0.1	±10	μΑ
I _{CC}	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5 \text{ V}$	-	0.1	10	μΑ
ΔI_{CC}	additional supply current	$V_I = V_{CC} - 0.6 \text{ V}; I_O = 0 \text{ A};$ $V_{CC} = 2.3 \text{ V} \text{ to } 5.5 \text{ V}$	-	5	500	μΑ
Cı	input capacitance		-	3.5	-	pF
T _{amb} = -	40 °C to +125 °C					
V _{OL}	LOW-level output voltage	$V_I = V_{IH}$ or V_{IL}				
		$I_O = 100 \mu A$; $V_{CC} = 1.65 \text{ V}$ to 5.5 V	-	-	0.1	V
		$I_O = 4 \text{ mA}; V_{CC} = 1.65 \text{ V}$	-		0.70	V
		$I_O = 8 \text{ mA}; V_{CC} = 2.3 \text{ V}$	-	-	0.70 0.45 0.60	V
		$I_O = 12 \text{ mA}; V_{CC} = 2.7 \text{ V}$	-	-		V
		$I_O = 24 \text{ mA}; V_{CC} = 3.0 \text{ V}$	-	-	0.80	V
		$I_O = 32 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	-	0.80	V
V _{OH}	HIGH-level output voltage	$V_I = V_{IH}$ or V_{IL}			0.1 V 0.70 V 0.45 V 0.60 V 0.80 V - V - V	
		$I_O = -100 \mu A$; $V_{CC} = 1.65 \text{ V to } 5.5 \text{ V}$	V _{CC} - 0.1	-	-	V
		$I_O = -4 \text{ mA}; V_{CC} = 1.65 \text{ V}$	0.95	-	-	V
		$I_{O} = -8 \text{ mA}; V_{CC} = 2.3 \text{ V}$	1.7	-	-	V
		$I_{O} = -12 \text{ mA}; V_{CC} = 2.7 \text{ V}$	1.9	-	-	V
		$I_{O} = -24 \text{ mA}; V_{CC} = 3.0 \text{ V}$	2.0	-	-	V
		$I_{O} = -32 \text{ mA}; V_{CC} = 4.5 \text{ V}$	3.4	-	-	V
l _l	input leakage current	$V_{I} = 5.5 \text{ V or GND}; V_{CC} = 5.5 \text{ V}$	-	±0.1	±20	μΑ
I _{OFF}	power-off leakage current	V_{I} or $V_{O} = 5.5 \text{ V}; V_{CC} = 0 \text{ V}$	-	-	±20	μΑ
I _{CC}	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5 \text{ V}$	-	-	40	μΑ
ΔI_{CC}	additional supply current	$V_1 = V_{CC} - 0.6 \text{ V}; I_O = 0 \text{ A};$ $V_{CC} = 2.3 \text{ V} \text{ to } 5.5 \text{ V}$	-	-	5	mA

^[1] All typical values are measured at V_{CC} = 3.3 V and T_{amb} = 25 $^{\circ}C.$

Dual non-inverting Schmitt trigger with 5 V tolerant input

12. Dynamic characteristics

Table 8. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V); for test circuit see Figure 8.

Symbol	Parameter	Conditions		–40 °C to +85 °C			-40 °C to +125 °C		Unit
				Min	Typ[1]	Max	Min	Max	
t _{pd}	propagation delay	nA to nY; see Figure 7	[2]						
		$V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$		1.5	5.6	10.5	1.5	13.1	ns
		$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		1.0	3.7	6.5	1.0	8.5	ns
		$V_{CC} = 2.7 \text{ V}$		1.0	3.8	6.5	1.0	8.5	ns
		$V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$		1.0	3.6	5.7	1.0	7.1	ns
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$		1.0	2.7	4.3	1.0	5.4	ns
C_{PD}	power dissipation capacitance	per buffer; $V_{CC} = 3.3 \text{ V}$; $V_I = \text{GND to } V_{CC}$	[3]	-	16.3	-	-	-	pF

^[1] Typical values are measured at $T_{amb} = 25$ °C and $V_{CC} = 1.8$ V, 2.5 V, 2.7 V, 3.3 V and 5.0 V respectively.

[3] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

 $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum (C_L \times V_{CC}^2 \times f_o)$ where:

 f_i = input frequency in MHz;

f_o = output frequency in MHz;


C_L = output load capacitance in pF;

V_{CC} = supply voltage in V;

N = number of inputs switching;

 $\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.

13. Waveforms

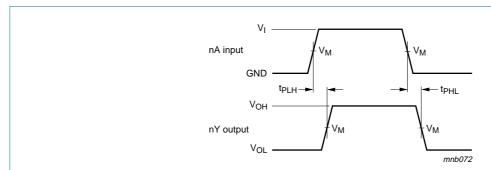

Measurement points are given in Table 9.

V_{OL} and V_{OH} are typical output voltage drop that occur with the output load.


Fig 7. The input (nA) to output (nY) propagation delays and the output transition times

^[2] t_{pd} is the same as t_{PLH} and t_{PHL}.

Dual non-inverting Schmitt trigger with 5 V tolerant input

Table 9. Measurement points

Supply voltage	Input	Output
V _{CC}	V _M	V _M
1.65 V to 1.95 V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
2.3 V to 2.7 V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
2.7 V	1.5 V	1.5 V
3.0 V to 3.6 V	1.5 V	1.5 V
4.5 V to 5.5 V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$



Measurement points are given in Table 10.

Definitions for test circuit:

R_L = Load resistance.

 C_L = Load capacitance including jig and probe capacitance.

 R_T = Termination resistance should be equal to output impedance Z_0 of the pulse generator.

 V_{EXT} = External voltage for measuring switching times.

Fig 8. Load circuitry for switching times

Table 10. Test data

Supply voltage	Input		Load	V _{EXT}	
V _{CC}	V _I	t _r , t _f	CL	R _L	t _{PLH} , t _{PHL}
1.65 V to 1.95 V	V_{CC}	≤ 2.0 ns	30 pF	1 kΩ	open
2.3 V to 2.7 V	V_{CC}	≤ 2.0 ns	30 pF	$500~\Omega$	open
2.7 V	2.7 V	≤ 2.5 ns	50 pF	$500~\Omega$	open
3.0 V to 3.6 V	2.7 V	≤ 2.5 ns	50 pF	$500~\Omega$	open
4.5 V to 5.5 V	V_{CC}	≤ 2.5 ns	50 pF	500 Ω	open

Dual non-inverting Schmitt trigger with 5 V tolerant input

14. Transfer characteristics


Table 11. Transfer characteristics

At recommended operating conditions. Voltages are referenced to GND (ground = 0 V).


Symbol	Parameter	Conditions	-40	–40 °C to +85 °C			-40 °C to +125 °C	
			Min	Typ[1]	Max	Min	Max	
V_{T+}	positive-going	see Figure 9 and Figure 10	'			'		
	threshold voltage	V _{CC} = 1.8 V	0.70	1.10	1.50	0.70	1.70	V
		V _{CC} = 2.3 V	1.00	1.40	1.80	1.00	2.00	V
		V _{CC} = 3.0 V	1.30	1.76	2.20	1.30	2.40	V
		V _{CC} = 4.5 V	1.90	2.47	3.10	1.90	3.30	V
		V _{CC} = 5.5 V	2.20	2.91	3.60	2.20	3.80	V
V_{T-}	negative-going threshold voltage	see Figure 9 and Figure 10						
		V _{CC} = 1.8 V	0.25	0.61	0.90	0.25	1.10	V
		$V_{CC} = 2.3 \text{ V}$	0.40	0.80	1.15	0.40	1.35	V
		$V_{CC} = 3.0 \text{ V}$	0.60	1.04	1.50	0.60	1.70	V
		V _{CC} = 4.5 V	1.00	1.55	2.00	1.00	2.20	V
		V _{CC} = 5.5 V	1.20	1.86	2.30	1.20	2.50	V
V_{H}	hysteresis voltage	(V _{T+} – V _T –); see <u>Figure 9</u> , <u>Figure 10</u> and <u>Figure 11</u>						
		V _{CC} = 1.8 V	0.15	0.49	1.00	0.15	1.20	V
		$V_{CC} = 2.3 \text{ V}$	0.25	0.60	1.10	0.25	1.30	V
		$V_{CC} = 3.0 \text{ V}$	0.40	0.73	1.20	0.40	1.40	V
		$V_{CC} = 4.5 \text{ V}$	0.60	0.92	1.50	0.60	1.70	V
		V _{CC} = 5.5 V	0.70	1.02	1.70	0.70	1.90	V

^[1] All typical values are measured at T_{amb} = 25 °C.

15. Waveforms transfer characteristics

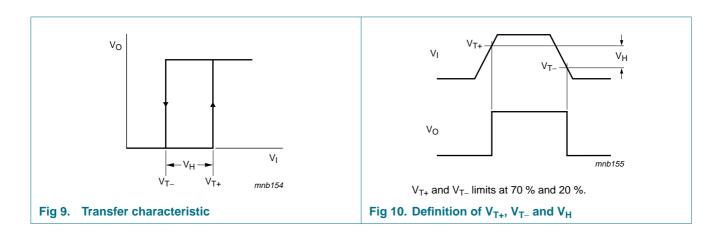


Dual non-inverting Schmitt trigger with 5 V tolerant input



 $V_{CC} = 3.0 \text{ V}.$

Fig 11. Typical transfer characteristic



- (1) Positive-going edge
- (2) Negative-going edge
 Linear change of V_I between 0.8 V to 2.0 V. All values given are typical unless otherwise specified.

Fig 12. Average I_{CC} as a function of V_{CC}

Dual non-inverting Schmitt trigger with 5 V tolerant input

16. Package outline

Plastic surface-mounted package; 6 leads

SOT363

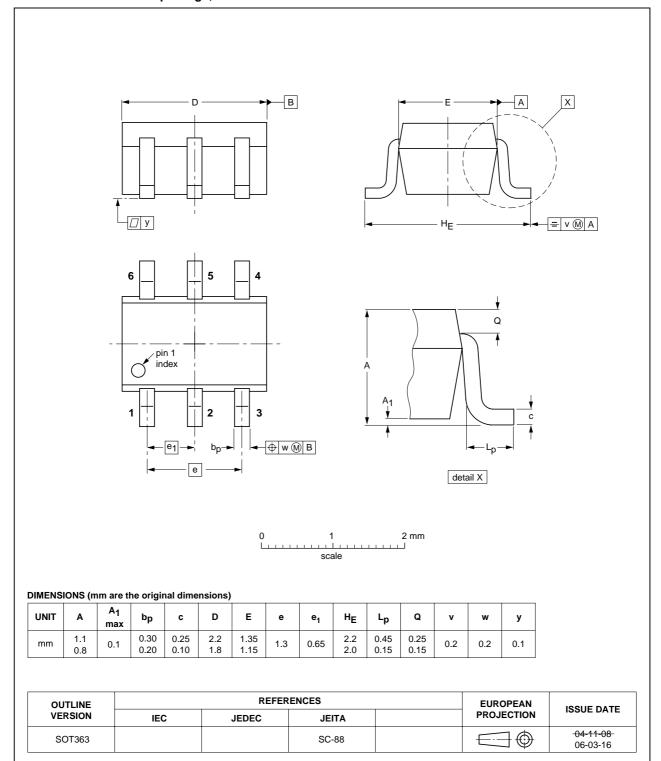


Fig 13. Package outline SOT363 (SC-88)

Dual non-inverting Schmitt trigger with 5 V tolerant input

Plastic surface-mounted package (TSOP6); 6 leads

SOT457

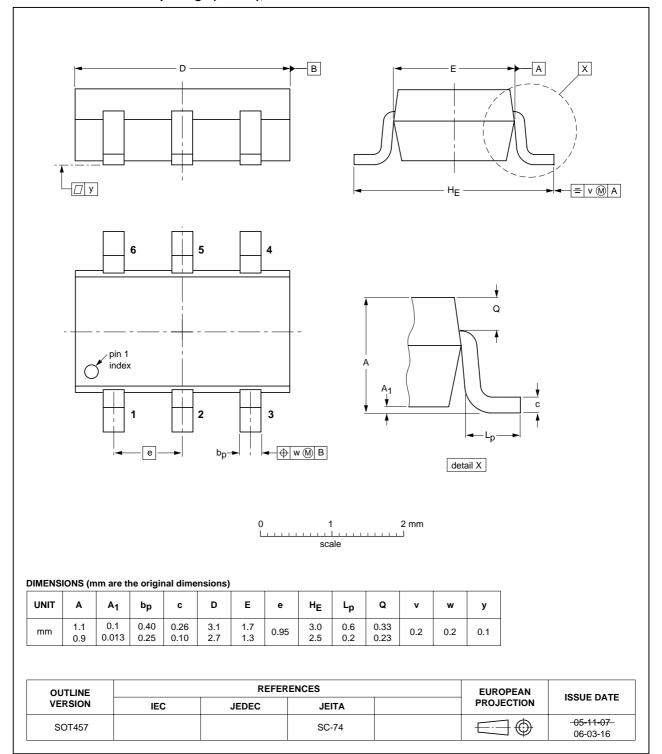


Fig 14. Package outline SOT457 (SC-74)

Dual non-inverting Schmitt trigger with 5 V tolerant input

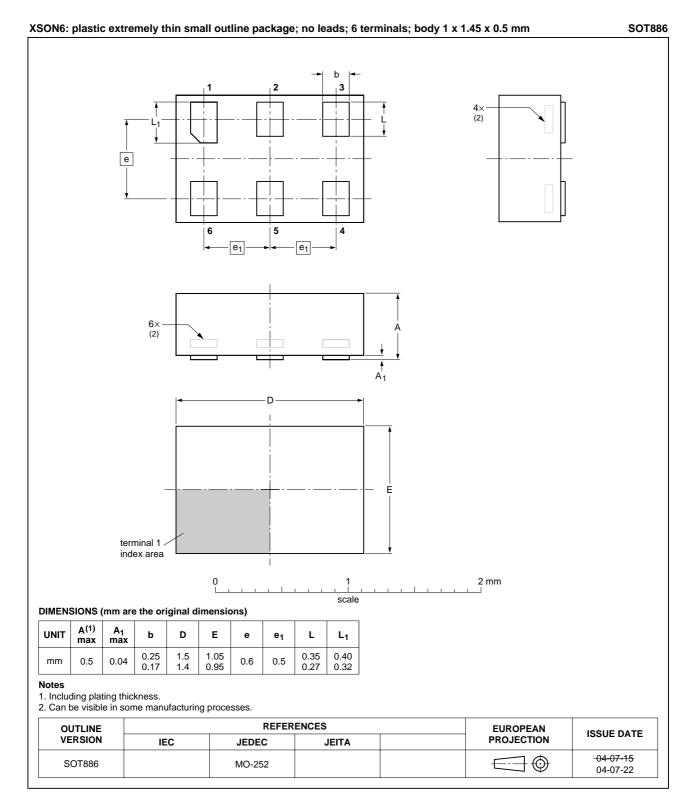


Fig 15. Package outline SOT886 (XSON6)

Dual non-inverting Schmitt trigger with 5 V tolerant input

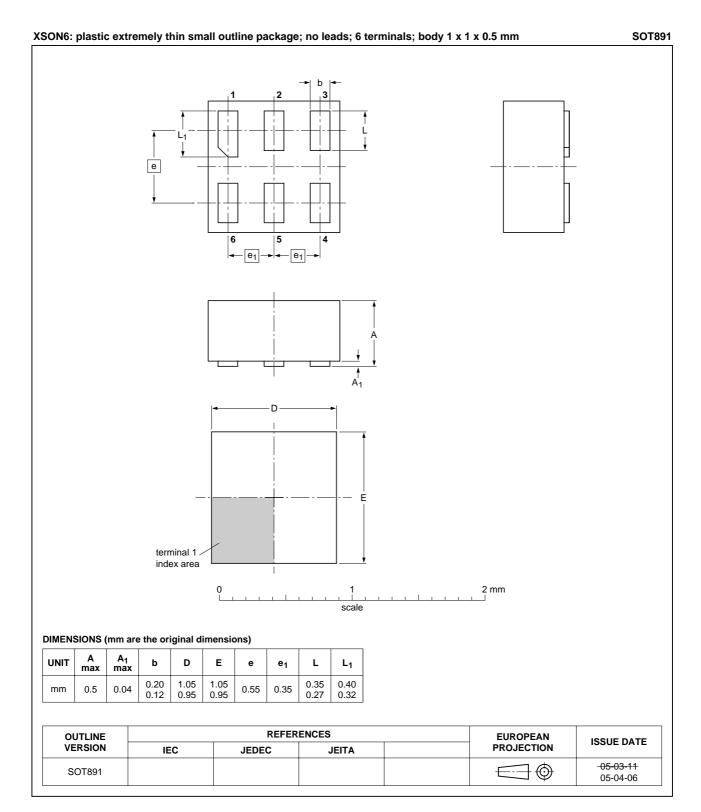


Fig 16. Package outline SOT891 (XSON6)

Dual non-inverting Schmitt trigger with 5 V tolerant input

17. Abbreviations

Table 12. Abbreviations

Acronym	Description
CMOS	Complementary Metal Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
НВМ	Human Body Model
MM	Machine Model
TTL	Transistor-Transistor Logic

18. Revision history

Table 13. Revision history

	•				
Document ID	Release date	Data sheet status	Change notice	Supersedes	
74LVC2G17_4	20061009	Product data sheet	-	74LVC2G17_3	
Modifications:	 The format of this data sheet has been redesigned to comply with the new identity guidelines of NXP Semiconductors. Legal texts have been adapted to the new company name where appropriate. Added type number 74LVC2G17GF (SOT891 package). 				
74LVC2G17_3	20050926	Product data sheet	-	74LVC2G17_2	
74LVC2G17_2	20040908	Product specification	-	74LVC2G17_1	
74LVC2G17_1	20030813	Product specification	-	-	

Dual non-inverting Schmitt trigger with 5 V tolerant input

19. Legal information

19.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

19.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

19.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfunction of a NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

19.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

20. Contact information

For additional information, please visit: http://www.nxp.com

For sales office addresses, send an email to: salesaddresses@nxp.com

Dual non-inverting Schmitt trigger with 5 V tolerant input

21. Contents

1	General description 1
2	Features
3	Applications
4	Ordering information 2
5	Marking 2
6	Functional diagram 2
7	Pinning information 3
7.1	Pinning
7.2	Pin description
8	Functional description 3
9	Limiting values 4
10	Recommended operating conditions 4
11	Static characteristics 4
12	Dynamic characteristics 6
13	Waveforms 6
14	Transfer characteristics 8
15	Waveforms transfer characteristics 8
16	Package outline
17	Abbreviations
18	Revision history
19	Legal information
19.1	Data sheet status
19.2	Definitions
19.3	Disclaimers
19.4	Trademarks15
20	Contact information
21	Contents 16

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



© NXP B.V. 2006.

All rights reserved.