
## Active Lowpass Filter

KR Model 2195


## **Overall Response**

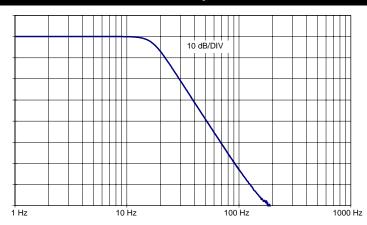

## Specifications

KR Part Number	2195
Filter Type	16 Hz Active Lowpass Filter
Approximate -3 dB Frequency	16 Hz
Attenuation at 60 Hz and above	>40 dB
Gain	0 dB ± 0.1 dB
Supply Voltage	± 15 V
Supply Current	7 mA max
Operating Temperature	0° C to 70° C
Storage Temperature	0° C to 70° C

## Outline Drawing

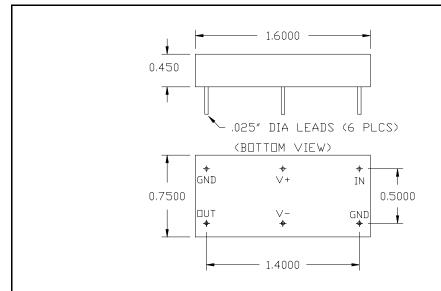

KR Electronics www.krfilters.com 91 Avenel Street Avenel, NJ 07001 732-636-1900

All Dimensions inches

**Epoxy Package** 

Connect both ground pins to ground plane