

# KR Electronics 2507 Notch Filter

## General Description


KR 2507 is a 12 KHz notch filter. Please consult the factory for other frequencies.

### Features

- Notch filter
- 12 KHz
- >60 dB Notch
- 5000  $\Omega$

## Typical Performance

*Overall Response*  
(10 dB/div)

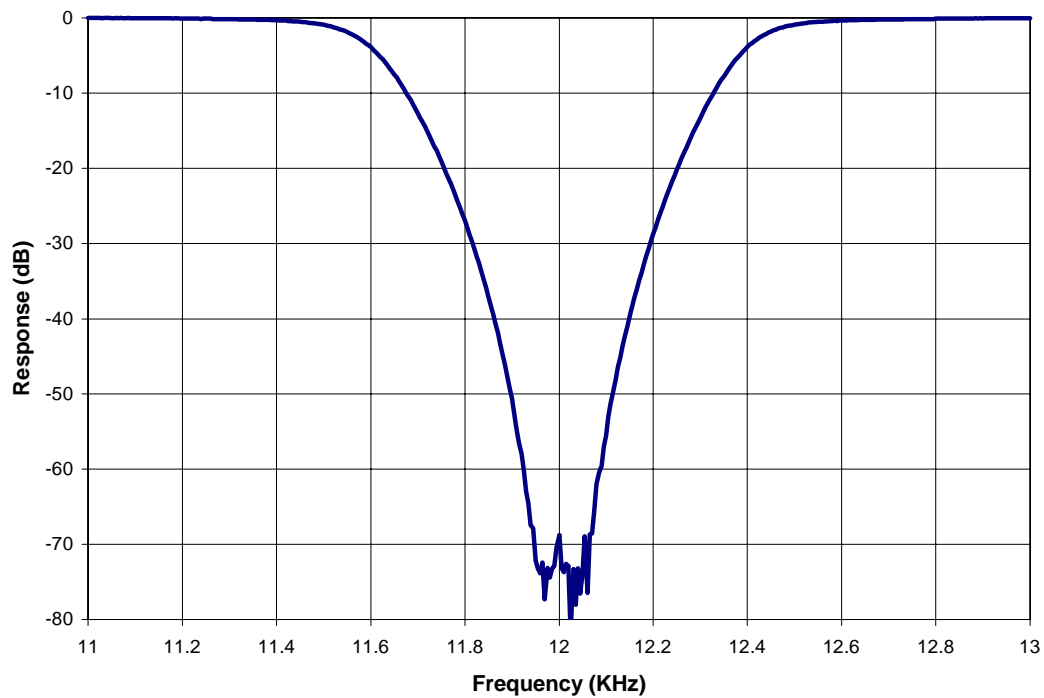

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 2507

## Specifications

Parameter	Specification
Filter type	Notch
Attenuation at 11.5 KHz	< 6 dB
Attenuation at 11.95 to 12.05 KHz	> 60 dB
Attenuation at 12.5 KHz	< 6 dB
Source & Load	5000 Ω

## Physical Dimensions

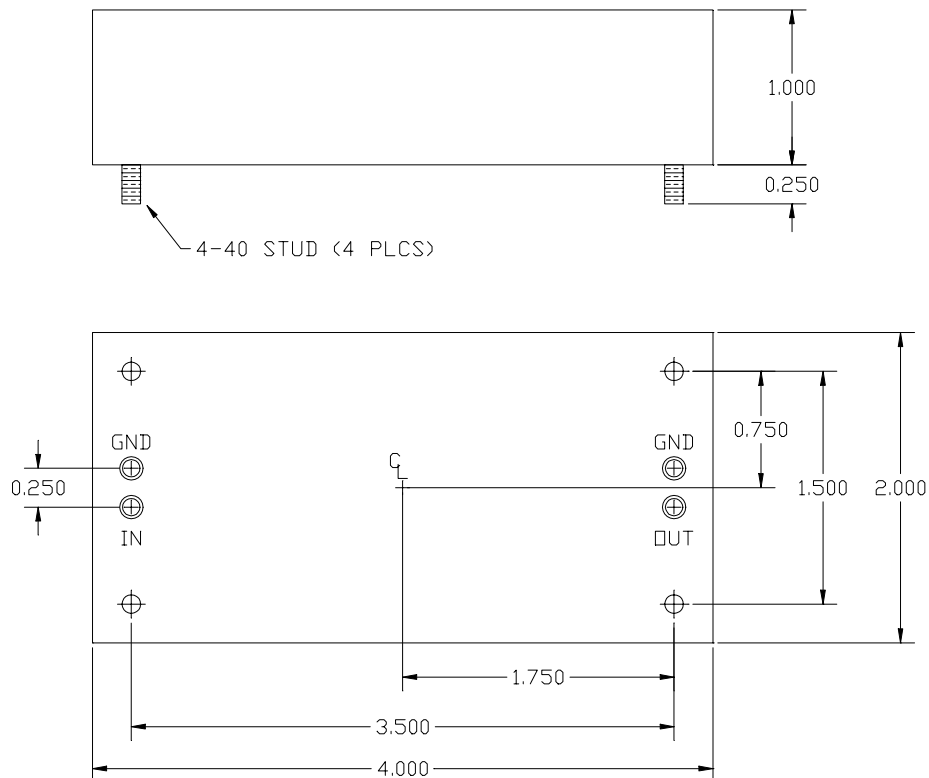

Dimensions in inches

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982