74HC3GU04

Inverter
Rev. 04. — 11 January 2010

Product data sheet

General description 1.

The 74HC3GU04 is a high-speed Si-gate CMOS device. This device provides three inverter gates with unbuffered outputs.

The 74HC3GU04 has CMOS input switching levels and supply voltage range 2 V to 6 V.

Features 2.

- Wide supply voltage range from 2.0 V to 6.0 V
- Symmetrical output impedance
- High noise immunity
- Low-power dissipation
- Balanced propagation delays
- Multiple package options
- ESD protection:
 - ◆ HBM JESD22-A114F exceeds 2000 V
 - ♦ MM JESD22-A115-A exceeds 200 V
- Specified from -40 °C to +85 °C and -40 °C to +125 °C

Ordering information 3.

Table 1. **Ordering information**

Type number	Package							
	Temperature range	Name	Description	Version				
74HC3GU04DP	–40 °C to +125 °C	TSSOP8	plastic thin shrink small outline package; 8 leads; body width 3 mm; lead length 0.5 mm	SOT505-2				
74HC3GU04DC	–40 °C to +125 °C	VSSOP8	plastic very thin shrink small outline package; 8 leads; body width 2.3 mm	SOT765-1				
74HC3GU04GD	–40 °C to +125 °C	XSON8U	plastic extremely thin small outline package; no leads; 8 terminals; UTLP based; body $3\times2\times0.5$ mm	SOT996-2				


Marking

Table 2. Marking

Type number	Marking code
74HC3GU04DP	HU4
74HC3GU04DC	HU4
74HC3GU04GD	HU4




5. Functional diagram

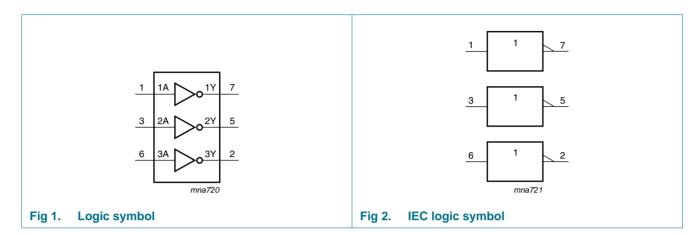

6. Pinning information

6.1 Pinning

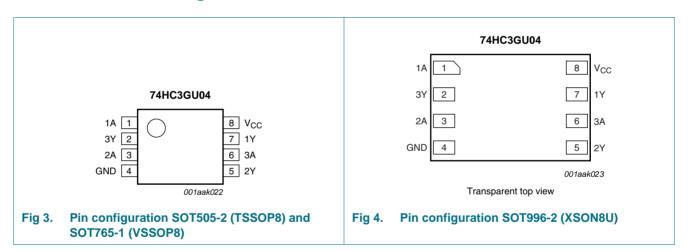

6.2 Pin description

Table 3. Pin description

Symbol	Pin	Description
1A, 2A, 3A	1, 3, 6	data input
1Y, 2Y, 3Y	7, 5, 2	data output
GND	4	ground (0 V)
V _{CC}	8	supply voltage

7. Functional description

Table 4. Function table [1]

Input	Output
nA	nY
L	Н
Н	L

^[1] H = HIGH voltage level; L = LOW voltage level.

8. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		-0.5	+7.0	V
I_{IK}	input clamping current	$V_I < -0.5 \text{ V or } V_I > V_{CC} + 0.5 \text{ V}$	<u>[1]</u> _	±20	mA
lok	output clamping current	V_{O} < -0.5 V or V_{O} > V_{CC} + 0.5 V	<u>[1]</u> _	±20	mA
lo	output current	$V_{O} = -0.5 \text{ V to } (V_{CC} + 0.5 \text{ V})$	<u>[1]</u> _	±25	mA
I _{CC}	quiescent supply current		<u>[1]</u> _	50	mA
I_{GND}	ground current		<u>[1]</u> –50	-	mA
T _{stg}	storage temperature		-65	+150	°C
P _{tot}	total power dissipation	$T_{amb} = -40 ^{\circ}\text{C} \text{ to } +125 ^{\circ}\text{C}$	[2] _	300	mW

^[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

9. Recommended operating conditions

Table 6. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V_{CC}	supply voltage		2.0	5.0	6.0	V
V_{I}	input voltage		0	-	V_{CC}	V
Vo	output voltage		0	-	V_{CC}	V
T _{amb}	ambient temperature		-40	+25	+125	°C
$\Delta t/\Delta V$	input transition rise and fall rate	V _{CC} = 2.0 V	-	-	625	ns/V
		$V_{CC} = 4.5 \text{ V}$	-	1.67	139	ns/V
		V _{CC} = 6.0 V	-	-	83	ns/V

^[2] For TSSOP8 package: above 55 °C the value of P_{tot} derates linearly with 2.5 mW/K. For VSSOP8 package: above 110 °C the value of P_{tot} derates linearly with 8 mW/K. For XSON8U package: above 118 °C the value of P_{tot} derates linearly with 7.8 mW/K.

10. Static characteristics

Table 7. Static characteristics

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	-40	–40 °C to +85 °C			-40 °C to +125 °C		
			Min	Typ[1]	Max	Min	Max		
V _{IH}	HIGH-level input	V _{CC} = 2.0 V	1.7	1.1	-	1.7	-	V	
	voltage	V _{CC} = 4.5 V	3.6	2.4	-	3.6	-	V	
		V _{CC} = 6.0 V	4.8	3.1	-	4.8	-	V	
V _{IL}	LOW-level input	V _{CC} = 2.0 V	-	0.9	0.3	-	0.3	V	
	voltage	V _{CC} = 4.5 V	-	2.1	0.9	-	0.9	V	
		V _{CC} = 6.0 V	-	2.9	1.2	-	1.2	V	
V_{OH}	HIGH-level output	$V_I = V_{IH}$ or V_{IL}							
	voltage	$I_O = -20 \mu A; V_{CC} = 2.0 V$	1.9	2.0	-	1.9	-	V	
		$I_{O} = -20 \mu A; V_{CC} = 4.5 V$	4.4	4.5	-	4.4	-	V	
		$I_{O} = -20 \mu A; V_{CC} = 6.0 V$	5.9	6.0	-	5.9	-	V	
		$I_{O} = -4.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	4.13	4.32	-	3.7	-	V	
		$I_O = -5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	5.63	5.81	-	5.2	-	V	
V _{OL}	LOW-level output	$V_I = V_{IH}$ or V_{IL}							
	voltage	$I_O = 20 \mu A; V_{CC} = 2.0 V$	-	0	0.1	-	0.1	V	
		$I_O = 20 \mu A; V_{CC} = 4.5 V$	-	0	0.1	-	0.1	V	
		$I_O = 20 \mu A; V_{CC} = 6.0 V$	-	0	0.1	-	0.1	V	
		$I_O = 4.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	0.15	0.33	-	0.4	V	
		$I_{O} = 5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	-	0.16	0.33	-	0.4	V	
l _l	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$	-	-	±1.0	-	±1.0	μΑ	
I _{CC}	supply current	per input pin; $V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0$ V	-	-	10	-	20	μА	
Cı	input capacitance		-	3.0	-	-	-	pF	

^[1] All typical values are measured at T_{amb} = 25 °C.

11. Dynamic characteristics

Table 8. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V); for test circuit see Figure 6.

Symbol	Parameter	Conditions	-40 °C to +85 °C		5 °C	-40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	
t _{pd} propagation delay		nA to nY; see Figure 5						
		V _{CC} = 2.0 V	-	13	75	-	90	ns
		V _{CC} = 4.5 V	-	6	15	-	18	ns
		V _{CC} = 6.0 V	-	5	13	-	15	ns

5 of 16

Table 8. Dynamic characteristics ...continued

Voltages are referenced to GND (ground = 0 V); for test circuit see Figure 6.

Symbol	Parameter	Conditions		–40 °C to +85 °C			-40 °C to +125 °C		Unit
				Min	Typ[1]	Max	Min	Max	
t _t tra	transition time	nY; see Figure 5	[3]						
		V _{CC} = 2.0 V		-	18	95	-	125	ns
		V _{CC} = 4.5 V		-	6	19	-	25	ns
		V _{CC} = 6.0 V		-	5	16	-	20	ns
C_{PD}	power dissipation capacitance	$V_I = GND \text{ to } V_{CC}$	[4]	-	5	-	-	-	pF

- [1] All typical values are measured at $T_{amb} = 25$ °C.
- [2] t_{pd} is the same as t_{PLH} and t_{PHL} .
- [3] t_t is the same as t_{TLH} and t_{THL} .
- [4] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$$P_D = C_{PD} \times V_{CC}{}^2 \times f_i \times N + \Sigma (C_L \times V_{CC}{}^2 \times f_o) \text{ where:}$$

 f_i = input frequency in MHz;

 f_0 = output frequency in MHz;


C_L = output load capacitance in pF;

V_{CC} = supply voltage in V;

N = number of inputs switching;

 $\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.

12. Waveforms

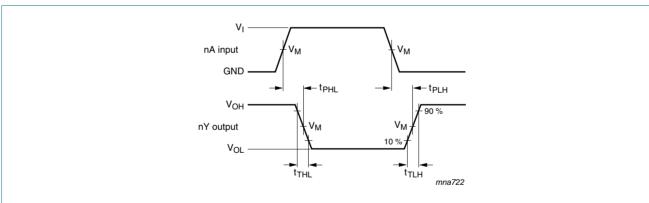



Measurement points are given in Table 9.

Fig 5. Propagation delay data input (nA) to data output (nY) and transition time output (nY)

Table 9. Measurement points

Туре	Input	Output
	V _M	V _M
74HC3GU04	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$





Test data is given in Table 10.

Definitions for test circuit:

 R_T = Termination resistance should be equal to output impedance Z_o of the pulse generator.

 C_L = Load capacitance including jig and probe capacitance.

R_L = Load resistance.


S1 = Test selection switch.

Fig 6. Test circuit for measuring switching times

Table 10. Test data

Туре	Input		Load	S1 position	
	VI	t _r , t _f	CL	R _L	t _{PHL} , t _{PLH}
74HC3GU04	GND to V _{CC}	≤ 6 ns	50 pF	1 kΩ	open


12.1 Additional characteristics



$$g_{fs} = \frac{\Delta I_o}{\Delta V_i}$$

Vo is constant.

Fig 7. Test set-up for measuring forward transconductance

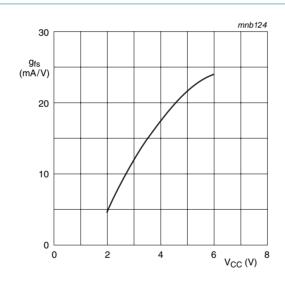

 $T_{amb} = 25 \, ^{\circ}C.$

Fig 8. Typical forward transconductance as a function of supply voltage

8 of 16

13. Typical transfer characteristics

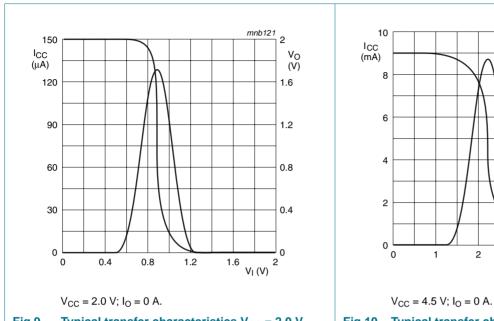


Fig 9. Typical transfer characteristics $V_{CC} = 2.0 \text{ V}$




Fig 10. Typical transfer characteristics $V_{CC} = 4.5 \text{ V}$

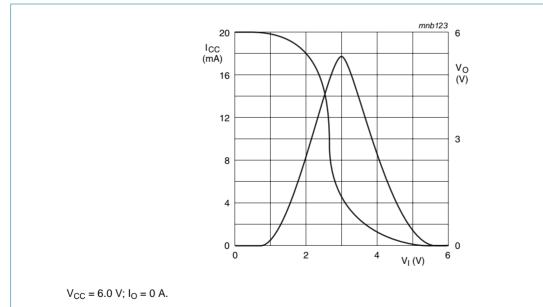


Fig 11. Typical transfer characteristics $V_{CC} = 6.0 \text{ V}$


14. Application information

Some applications for the 74HC3GU04 are:

- Linear amplifier (see Figure 12)
- Crystal oscillator (see Figure 14).

74HC3GU04_4 © NXP B.V. 2010. All rights reserved.

Remark: All values given are typical values unless otherwise specified.



 $Z_L > 10 \text{ k}\Omega$.

 $R1 \ge 3 \ k\Omega$.

 $R2 \le 1 M\Omega$.

Open loop amplification: $A_{OL} = 20$ (typical).


$$\mbox{Voltage amplification:} \quad A_V = -\frac{A_{OL}}{I + \frac{RI}{R2}(I + A_{\rm OL})} \, .$$

 $V_{o(p-p)} = V_{CC} - 1.5 \text{ V centered at } 0.5 \times V_{CC}.$

Unity gain bandwidth product is 5 MHz (typical).


Input capacitance see Figure 13.

Fig 12. Linear amplifier application

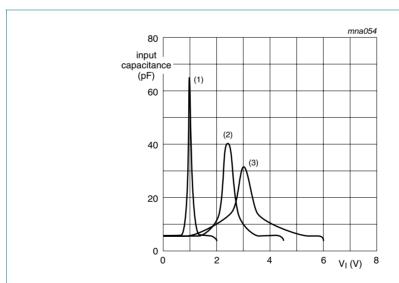

- (1) $V_{CC} = 2.0 \text{ V}.$
- (2) $V_{CC} = 4.5 \text{ V}.$
- (3) $V_{CC} = 6.0 \text{ V}.$

Fig 13. Typical input capacitance as a function of the input voltage



Test data is given in Table 11 and Table 12.

C1 = 47 pF (typical).

C2 = 22 pF (typical).

R1 = 1 M Ω to 10 M Ω (typical).

R2 optimum value depends on the frequency and required stability against changes in V_{CC} or average minimum I_{CC} ($I_{CC} = 2$ mA at $V_{CC} = 3.0$ V and f = 1 MHz)

Fig 14. Crystal oscillator application

Table 11. External components for resonator (f < 1 MHz)


Frequency	R1	R2	C1	C2	
10 kHz to 15.9 kHz	$2.2~\mathrm{M}\Omega$	220 kΩ	56 pF	20 pF	
16 kHz to 24.9 kHz	$2.2~\mathrm{M}\Omega$	220 kΩ	56 pF	10 pF	
25 kHz to 54.9 kHz	$2.2~\mathrm{M}\Omega$	100 kΩ	56 pF	10 pF	
55 kHz to 129.9 kHz	$2.2~\mathrm{M}\Omega$	100 kΩ	47 pF	5 pF	
130 kHz to 199.9 kHz	$2.2~\mathrm{M}\Omega$	47 kΩ	47 pF	5 pF	
200 kHz to 349.9 kHz	$2.2~\mathrm{M}\Omega$	47 kΩ	47 pF	5 pF	
350 kHz to 600 kHz	2.2 ΜΩ	47 kΩ	47 pF	5 pF	

Table 12. Optimum value for R2

Frequency	R2	Optimum			
3 kHz	$2.0~\mathrm{k}\Omega$	minimum required I _{CC}			
	8.0 kΩ	minimum influence due to change in V _{CC}			
6 kHz	1.0 kΩ	minimum required I _{CC}			
	4.7 kΩ	minimum influence by V _{CC}			
10 kHz	$0.5~\mathrm{k}\Omega$	minimum required I _{CC}			
	2.0 kΩ	minimum influence by V _{CC}			
14 kHz	$0.5~\mathrm{k}\Omega$	minimum required I _{CC}			
	2.0 kΩ	minimum influence by V _{CC}			
> 14 kHz	replace R2 b	replace R2 by C3 = 35 pF (typical)			

15. Package outline

TSSOP8: plastic thin shrink small outline package; 8 leads; body width 3 mm; lead length 0.5 mm SOT505-2

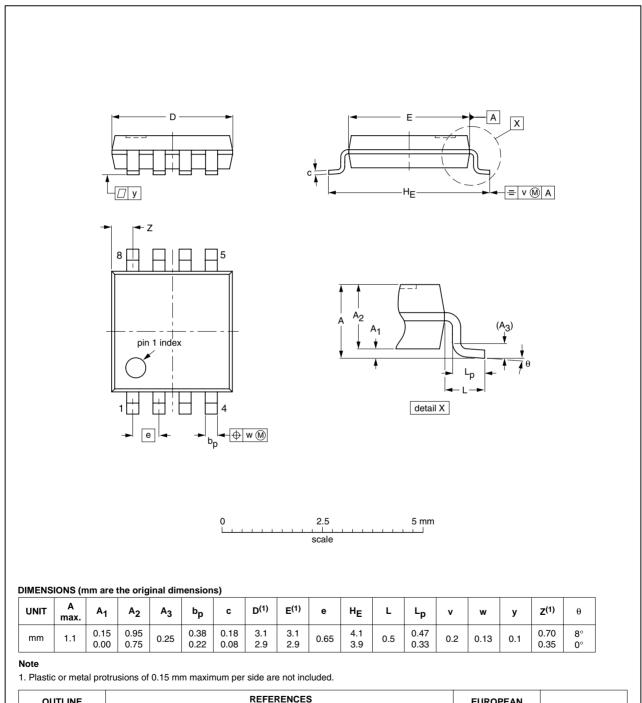


OUTLINE		REFER	EUROPEAN	ISSUE DATE			
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE	
SOT505-2						02-01-16	

Fig 15. Package outline SOT505-2 (TSSOP8)

© NXP B.V. 2010. All rights reserved.

VSSOP8: plastic very thin shrink small outline package; 8 leads; body width 2.3 mm

SOT765-1

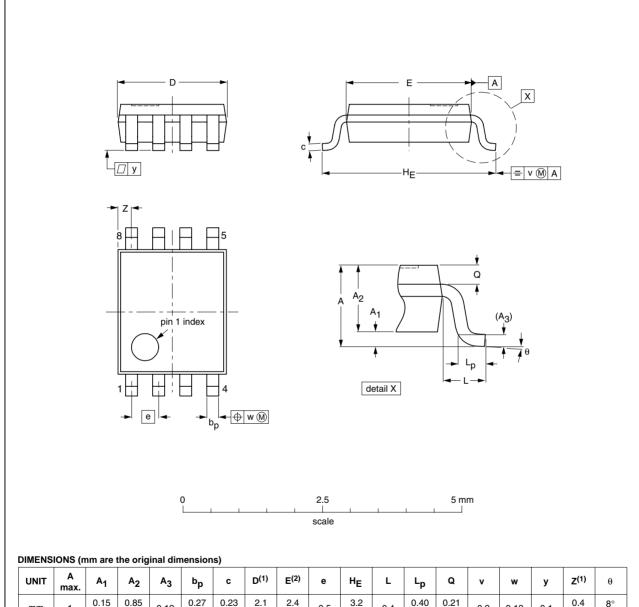

UNIT	A max.	A ₁	A ₂	A ₃	bp	С	D ⁽¹⁾	E ⁽²⁾	е	HE	L	Lp	Q	v	w	у	Z ⁽¹⁾	θ
mm	1	0.15 0.00	0.85 0.60	0.12	0.27 0.17	0.23 0.08	2.1 1.9	2.4 2.2	0.5	3.2 3.0	0.4	0.40 0.15	0.21 0.19	0.2	0.13	0.1	0.4 0.1	8° 0°

- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

OUTLINE		REFER	EUROPEAN	ISSUE DATE			
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE	
SOT765-1		MO-187				02-06-07	

Fig 16. Package outline SOT765-1 (VSSOP8)

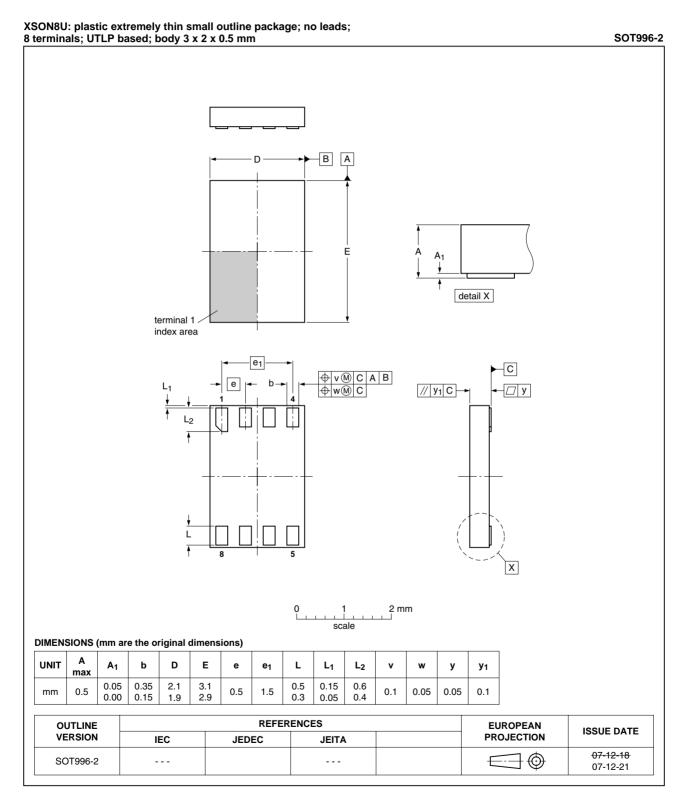


Fig 17. Package outline SOT996-2 (XSON8U)

74HC3GU04_4 © NXP B.V. 2010. All rights reserved.

16. Abbreviations

Table 13. Abbreviations

Acronym	Description
CMOS	Complementary Metal Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
НВМ	Human Body Model
MM	Machine Model
TTL	Transistor-Transistor Logic

17. Revision history

Table 14. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74HC3GU04_4	20100111	Product data sheet	-	74HC3GU04_3
Modifications:	 Marking cod 	e for 74HC3GU04DP package	changed from HU04	4 to HU4
74HC3GU04_3	20090511	Product data sheet	-	74HC3GU04_2
74HC3GU04_2	20031126	Product specification	-	74HC3GU04_1
74HC3GU04_1	20030818	Product specification	-	-

18. Legal information

18.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

18.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

18.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental

damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

18.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

19. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

20. Contents

1	General description 1
2	Features
3	Ordering information 1
4	Marking 1
5	Functional diagram 2
6	Pinning information
6.1	Pinning
6.2	Pin description 2
7	Functional description 3
8	Limiting values 3
9	Recommended operating conditions 3
10	Static characteristics 4
11	Dynamic characteristics 4
12	Waveforms
12.1	Additional characteristics 7
13	Typical transfer characteristics 8
14	Application information 8
15	Package outline
16	Abbreviations 14
17	Revision history 14
18	Legal information
18.1	Data sheet status
18.2	Definitions
18.3	Disclaimers
18.4	Trademarks15
19	Contact information
20	Contents

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



