

Technical Data Sheet

1206 Package Silicin PIN Photodiode

Features

- Fast response time
- High photo sensitivity
- Small junction capacitance
- Package in 8mm tape in "7" diameter reel
- Pb free
- The product itself will remain within RoHS compliant version.



Descriptions

 PD15-21B/TR8 is a high speed and high sensitive PIN photodiode in miniature flat top view lens SMD package and it is molded in a black plastic. The device is Spectrally matched to infrared emitting diode.

Applications

- High speed photo detector
- Copier
- Game machine


Device Selection Guide

LED Part No.	Chip	Lens Color	
LED Part No.	Material	Lens Color	
PD15-21B/TR8	Silicon	Black	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 1 of 10



Package Dimensions

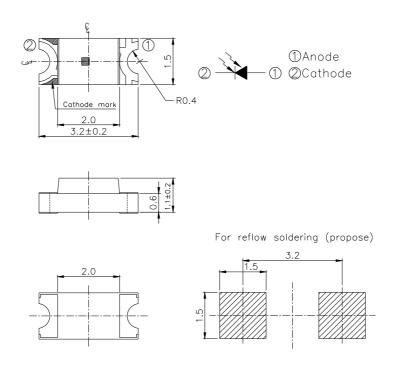

Notes: 1.All dimensions are in millimeters

2.Tolerances unless dimensions ±0.1mm

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Units
Reverse Voltage	V_R	32	V
Operating Temperature	T_{opr}	-25 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	T_{stg}	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Soldering Temperature *1	T_{sol}	260	$^{\circ}\!\mathbb{C}$
Power Dissipation at(or below)	P _c	150	mW
25°C Free Air Temperature			

Notes: *1:Soldering time ≤ 5 seconds.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 2 of 10



Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Condition	Min	Тур	Max	Unit
Rang Of Spectral Bandwidth	λ 0.5		730		1100	nm
Wavelength Of Peak Sensitivity	λp			940		nm
Open-Circuit Voltage	V _{OC}	Ee=5mW /cm ² λ P=940nm		0.42		V
Short-Circuit Current	I_{SC}	Ee=1mW /cm ² λ_{P} =875nm		0.8		μΑ
Reverse Light Current	I_{L}	Ee=1mW /cm ² λ_P =875nm V_R =5V	0.2	0.8		μΑ
Dark Current	I_D	$Ee=0mW/cm^2$ $V_R=10V$			10	nA
Reverse Breakdown Voltage	B_{VR}	Ee=0mW /cm ² I_R =100 μ A	32	170		V
Total Capacitance	Ct	$Ee=0mW/cm^{2}$ $f=1MHz$ $V_{R}=5V$		5		pF
Rise Time	t _r	$V_R=5V$		6		
Fall Time	t_{f}	$R_L=1000\Omega$		6		nS

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 3 of 10



Typical Electro-Optical Characteristics Curves

Fig.1 Power Dissipation vs.

Ambient Temperature




Fig.2 Spectral Sensitivity




Fig.3 Dark Current vs.

Ambient Temperature





Fig.4 Reverse Light Current vs. Ee



Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 4 of 10 Device No: DTD-152-139 Prepared date: 02-15-2008 Prepared by: Jaine tsai




Typical Electro-Optical Characteristics Curves

Fig.5 Terminal Capacitance vs.

Reverse Voltage

10 f=1MHz $V_R=5V$ Ee=0mW/cm² Terminal Capacitance Ct (pF) 8 6 4 2 0.1 10 100 1 Reverse Voltage (V)

Fig.6 Response Time vs. Load Resistance



http://www.everlight.com Everlight Electronics Co., Ltd. Rev 2 Page: 5 of 10 Device No: DTD-152-139 Prepared date: 02-15-2008 Prepared by : Jaine tsai




Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: $60\pm5^{\circ}$ C for 24 hours.
- 3. Soldering Condition
- 3.1 Lead solder temperature profile

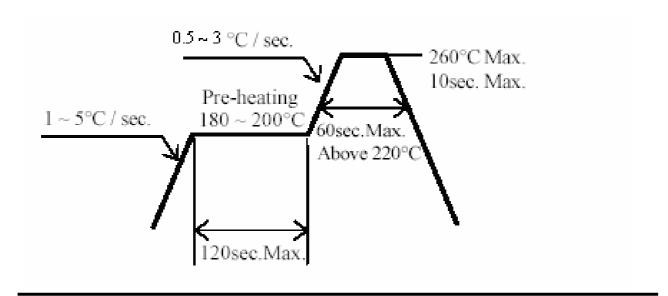

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 6 of 10




- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

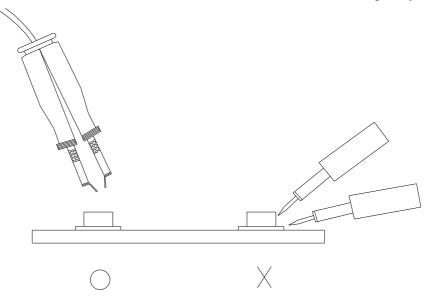

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 7 of 10 Device No: DTD-152-139

Prepared date: 02-15-2008 Prepared by: Jaine tsai



Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%


NO.	Item	Test Conditions	Test Hours/	Sample	Failure	Ac/Re
			Cycles	Sizes	Judgement	
					Criteria	
1	REFLOW Soldering	TEMP. : 260°C±5°C	6Mins	22pcs		0/1
		10secs			$I_L \leq L \times 0.8$	
2	Temperature Cycle	H:+100°C 15mins	50Cycles	22pcs		0/1
		5mins			L: Lower	
		L: -40°C 15mins			Specification	
3	Thermal Shock	H :+100°C	50Cycles	22pcs	Limit	0/1
		↓ 10secs				
		L :-10°C 5mins				
4	High Temperature	TEMP. ∶ +100°C	1000hrs	22pcs		0/1
	Storage					
5	Low Temperature	TEMP. : -40°C	1000hrs	22pcs		0/1
	Storage					
6	DC Operating Life	$V_R=5V$	1000hrs	22pcs		0/1
7	High Temperature/	85°C /85% R.H	1000hrs	22pcs		0/1
	High Humidity					

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 8 of 10




Package Dimensions

1. Reel Dimensions

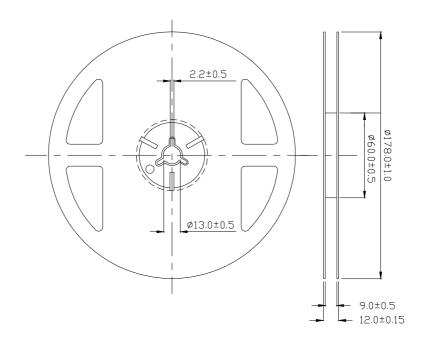

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

2. Carrier Tape Dimensions:(Quantity: 2000pcs/reel)

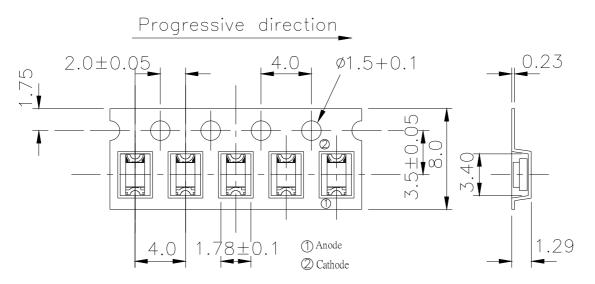


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 9 of 10



Packing Procedure

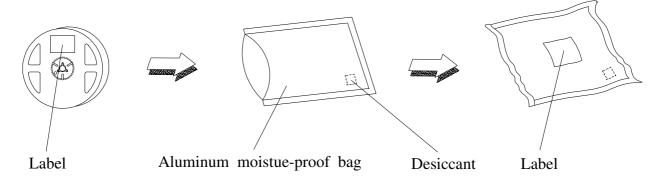

Label Form Specification



CPN: Customer's Production Number

P/N: Production Number QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Tel: 886-2-2267-2000, 2267-9936

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 10 of 10