Embedded Power for **Business-Critical Continuity**

> Rev. 10.01.08 124 DA4 Series 1 of 3

DA4 Series 4 Watts

Total Power: Input Voltage: # of Outputs:

4 Watts 90-264 VAC Single



Electrical Specifications

| 90-264 VAC (wide range) | | | | |
|--|--|--|--|--|
| 47-63 Hz | | | | |
| FCC Part 15, Subpart B Class B & EN55022 (CISPR 22) Class B &EMC89/336/EEC | | | | |
| 100 µA @ 50/60 Hz, 230 VAC input | | | | |
| | | | | |
| 5.5V (5.0V - 6.0V) | | | | |
| 4W | | | | |
| 15 ms. typical at full load @ 115 VAC | | | | |
| 25% above nominal output maximum Latching type | | | | |
| Output short circuit protection auto recover Overload protected > 800mA | | | | |
| DC cable with 2.5 mm x 5.5 mm barrel plug DC plug center +V; DC plug outer -V | | | | |
| DC plug center -V; DC plug outer +V | | | | |
| | | | | |

Environmental Specifications

| Operating temperature: |
|------------------------|
| Storage temperature: |
| Electromagnetic |
| susceptibility: |
| Humidity: |
| |

0° to 50°C ambient -40°C to +85°C

Per IEC 60068-2-6

Designed to meet EN55082-1 Operating; non-condensing 20% to 90% RH

Vibration:



Special Features

- Switching wallmount power supply
- Available in multiple AC plug configurations
- CE Mark EMC & LVD
- Universal AC input
- Regulated output
- Overload and short circuit protection
- Constant voltage, constant current
- High MTBF
- Built in EMI filter (CISPR 22 Class B)
- LED power good indicator

Safety

| UL | 60950 / 6500 |
|--------------|------------------------|
| CSA | 60950 |
| TUV | 60950 |
| NEMKO | 60950 |
| CB | Certificate and report |
| CE | EMC & LVD |
| CCC | Mark |
| | |

Embedded Power for **Business-Critical Continuity**

Ordering Information


| ordening information | | | | | | | | | |
|----------------------|------------------|-------------------|-----------------|-----------------|-----------|-----------------------------------|--|--|--|
| Model Number | Maximum Power | Output Voltage | Minimum Load | Maximum Load | Peak Load | Ripple P/P (PARD) ¹ | | | |
| DA4-050US | 4W | 5.5V | 0 | 0.75A | 0.80A | 150mV | | | |
| DA4-050EU | 4W | 5.5V | 0 | 0.75A | 0.80A | 150mV | | | |
| DA4-050CH | 4W | 5.5V | 0 | 0.75A | 0.80A | 150mV | | | |


1. Peak-to-peak with 1 MHz bandwidth and 10 μ F (tantalum capacitor) in parallel with a 0.1 μ F capacitor at rated line voltage and load ranges.

2. Output should not be crounded for EMI purpose.


3. Add -0001 suffix to the part number for reverse polarity, for example DA4-050US-0001.


Mechanical Drawing

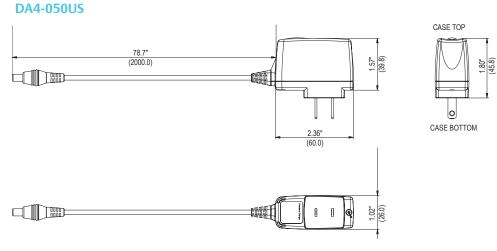




DA4-050EU

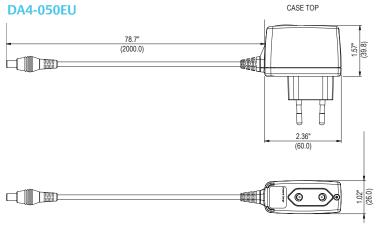



CASE BOTTOM





Rev.10.01.08_124 DA4 Series 2 of 3

Rev. 10.01.08_124 DA4 Series 3 of 3

Mechanical Drawing

DA4-050CH

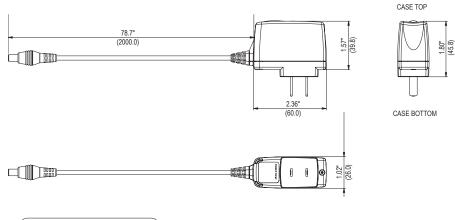



Notes:

- 1. Specifications subject to change without notice.
- 2. all dimensions in inches (mm), tolerance is ±.02"
- 3. Warranty: 2 year
- 4. Weight: 0.181 lb. / 0.082 kg.

Americas

5810 Van Allen Way Carlsbad, CA 92008 USA Telephone: +1 760 930 4600 Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park Merry Hill, Dudley West Midlands, DY5 1LX United Kingdom Telephone: +44 (0) 1384 842 211 Facsimile: +44 (0) 1384 843 355

Asia (HK)

16th - 17th Floors, Lu Plaza 2 Wing Yip Street, Kwun Tong Kowloon, Hong Kong Telephone: +852 2176 3333 Facsimile: +852 2176 3888

For global contact, visit:

www.astecpower.com


www.artesyn.com

technicalsupport@astec.com technicalsupport@artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.



Site Monitoring and Services

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2007 Emerson Electric Co.