EVERLIGHT

EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet(Preliminary)

Side View Red SMD LEDs

57-21SURC/S530-XX/TR8

Features

- Fluorescence Type
- High Luminous Intensity
- High Efficiency
- Pb-free.
- The product itself will remain with RoHS compliant version

Descriptions

The 57-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.



Applications

- OA Equipment
- Backlighting of Full Color LCD
- Automotive Equipment
- Replacement of Conventional Light Bulbs and Fluorescent Lamps


Device Selection Guide

	Chip	
Material	Emitted Color	Lens Color
AlGaInP	Brilliant Red	Water Clear

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:18-Jan-2006



Package Dimensions

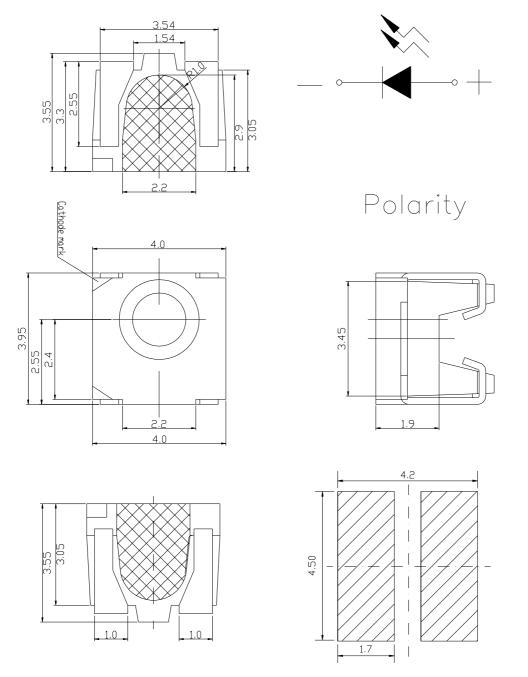

Recommended soldering pad design

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:18-Jan-2006 Rev. 1 Page: 2 of 10 Prepared by:Rita Shen

Absolute Maximum Ratings (Ta=25°C)						
Parameter	Symbol	Rating	Unit			
Reverse Voltage	Vr	5	V			
Forward Current	IF	25	mA			
Operating Temperature	Topr	-40 ~ +85	°C			
Storage Temperature	Tstg	-40 ~ +100	°C			
Electrostatic Discharge(HBM)	ESD	2000	V			
Power Dissipation	Pd	60	mW			
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	60	mA			
Soldering Temperature	Tsol	Reflow Soldering : 260 °(Hand Soldering : 350 °				

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:18-Jan-2006 Rev. 1 Page: 3 of 10 Prepared by:Rita Shen



Electro-Optical Characteristics (Ta=25°C)


Parameter	Symbol	*Chip Rank	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	A3	40	68				
		A4	50	82		mcd		
		A5	63	99			IF=20mA	
		A6	80	135				
		A7	125	215				
Viewing Angle	2 <i>θ</i> 1/2			120		deg	IF=20mA	
Peak Wavelength	λp			632		nm	IF=20mA	
Dominant Wavelength	λd			624		nm	IF=20mA	
Spectrum Radiation Bandwidth	Δλ			20		nm	IF=20mA	
Forward Voltage	VF		1.7	2.0	2.4	V	IF=20mA	
Reverse Current	Ir				10	μ A	VR=5V	

*57-21SURC/S530-<u>XX</u>/TR8



Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:18-Jan-2006 Rev. 1 Page: 4 of 10 Prepared by:Rita Shen

Typical Electro-Optical Characteristics Curves

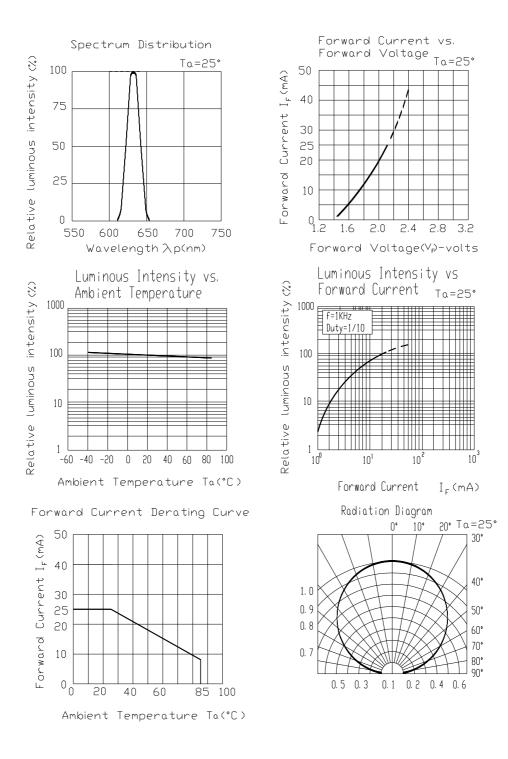


Everlight Electronics Co., Ltd. Device No. :

http://www.everlight.com Date:18-Jan-2006 Rev. 1 Page: 5 of 10 Prepared by:Rita Shen




EVERLIGHT ELECTRONICS CO., LTD.

57-21SURC/S530-XX/TR8

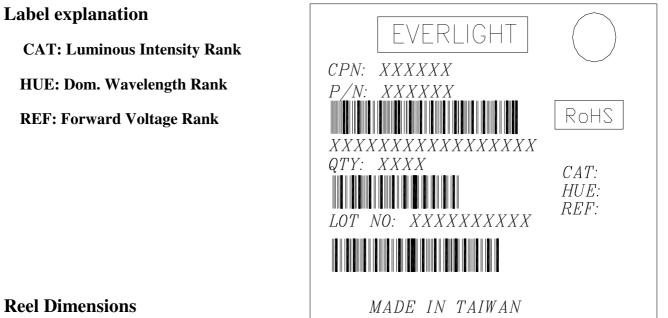

Reel Dimensions

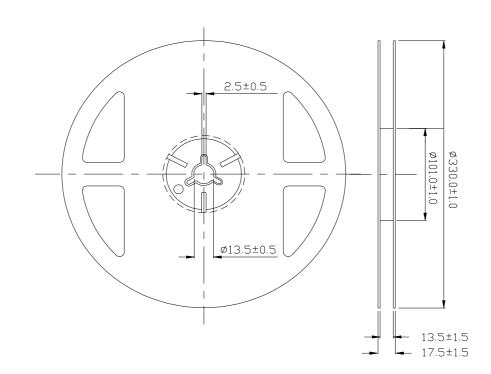


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. :

http://www.everlight.com Date:18-Jan-2006


Rev. 1 Page: 6 of 10 Prepared by:Rita Shen

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

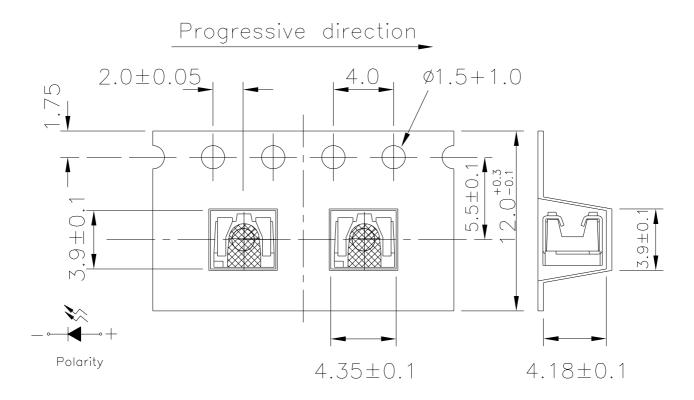

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

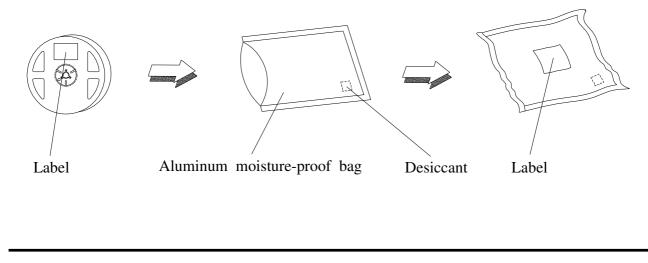

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:18-Jan-2006 Rev. 1 Page: 7 of 10 Prepared by:Rita Shen



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1


http://www.everlight.com Date:18-Jan-2006

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

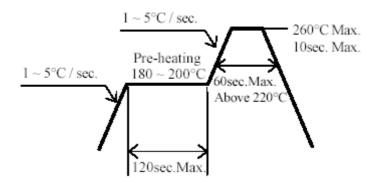

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd.	http://www.everlight.com	Rev. 1	Page: 9 of 10
Device No. :	Date:18-Jan-2006	Prepared by:Rit	a Shen



5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

Х

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:18-Jan-2006 Rev. 1 Page: 10 of 10 Prepared by:Rita Shen