



# Lowpass Filter

KR Model  
2391

## Passband Amplitude & Group Delay

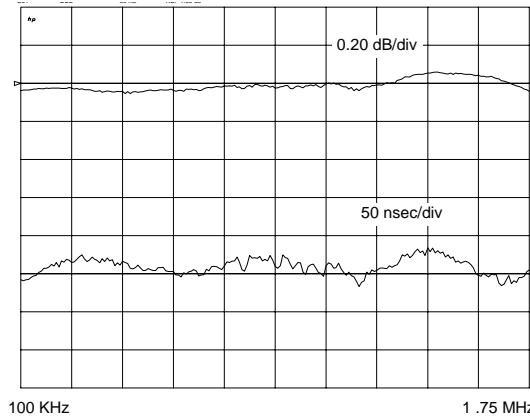


## Overall Response

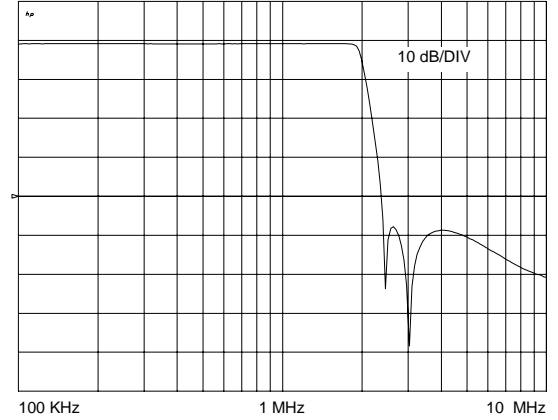

## Specifications

<b>KR Part Number</b>	<b>2391</b>
<b>Filter Type</b>	Lowpass
<b>Insertion Loss</b>	< 1 dB
<b>End of Passband</b>	1.75 MHz
<b>Passband Ripple</b>	< 0.25 dB
<b>1.92 MHz</b>	< 3 dB
<b>Start of Stopband</b>	2.41 MHz
<b>Stopband Attenuation</b>	> 45 dB
<b>Group Delay Ripple</b>	< 50 nsec
<b>Group Delay Control to</b>	1.75 MHz
<b>Source and Load Impedance</b>	50 $\Omega$

## Outline Drawing

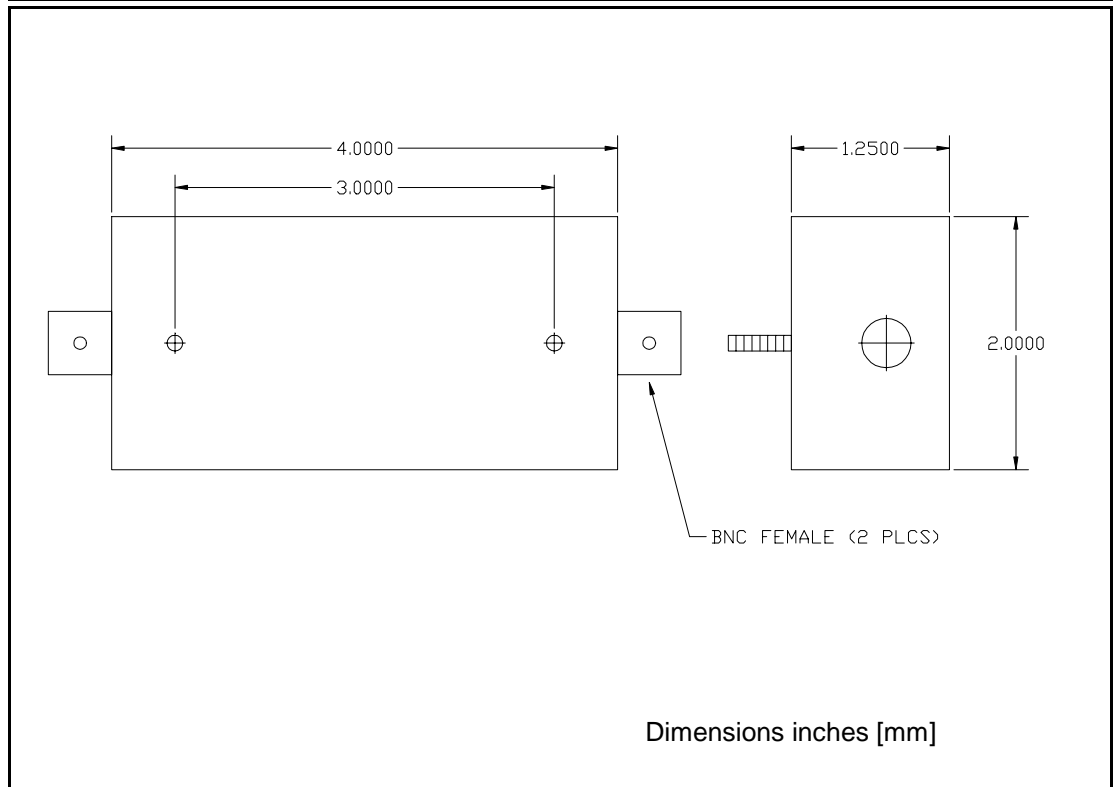

**KR Electronics**  
91 Avenel Street  
Avenel, NJ 07001

Phone: (732) 636-1900  
Fax: (732) 636-1982