



Cascadable Amplifier 10 to 1500 MHz

A28-2/ SMA28-2

V3

Features

• LOW NOISE: 3.5 dB (TYP.)

HIGH EFFICIENCY: 27 mA (TYP.) @ +5 Vdc
GOOD DYNAMIC RANGE: 105 dB (TYP.)

LOW VSWR: <1.4:1 (TYP.)

Description

The A28-2 RF amplifier is a discrete thin film hybrid design, which incorporates the use of thin film manufacturing processes for accurate performance and high reliability.


This single stage bipolar transistor feedback amplifier design displays impressive performance over a broadband frequency range. An active DC biasing network is used for temperature-stable performance, in addition to an RF Choke, used for power supply decoupling.

Both TO-8 and Surface Mount packages are hermetically sealed, and MIL-STD-883 environmental screening is available.

Ordering Information

Part Number	Package
A28-2	TO-8
SMA28-2	Surface Mount
CA28-2	SMA Connectorized
L	

Product Image



Electrical Specifications: $Z_0 = 50\Omega$, $V_{CC} = +5 V_{DC}$

Parameter	Units	Typical	Guaranteed	
Parameter		25°C	0° to 50°C	-54° to +85°C*
Frequency	MHz	5-1600	10-1500	10-1500
Small Signal Gain (min)	dB	14.0	13.0	12.5
Gain Flatness (max)	dB	±0.3	±0.5	±1.0
Reverse Isolation	dB	16		
Noise Figure (max)	dB	3.5	4.5	5.0
Power Output @ 1 dB comp. (min)	dBm	10.5	9.5	8.5
IP3	dBm	+24		
IP2	dBm	+34		
Second Order Harmonic IP	dBm	+40		
VSWR Input / Output (max)		1.3:1 / 1.5:1	1.8:1 / 1.9:1	1.9:1 / 2.0:1
DC Current @ 5 Volts (max)	mA	27	30	32

Absolute Maximum Ratings

Parameter	Absolute Maximum	
Storage Temperature	-62°C to +125°C	
Case Temperature	+125°C	
DC Voltage	+8 V	
Continuous Input Power	+13 dBm	
Short Term Input power (1 minute max.)	50 mW	
Peak Power (3 µsec max.)	0.5 W	
"S" Series Burn-In Temperature (case)	+125°C	

Thermal Data: $V_{CC} = +5 V_{DC}$

Parameter	Rating
Thermal Resistance θ_{jc}	160°C/W
Transistor Power Dissipation P _d	0.098 W
Junction Temperature Rise Above Case T _{jc}	+16°C

^{*} Over temperature performance limits for part number CA28-2, guaranteed from 0°C to +50°C only.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

[•] North America Tel: 800.366.2266 / Fax: 978.366.2266

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298






Cascadable Amplifier 10 to 1500 MHz

A28-2/ SMA28-2


Typical Performance Curves at +25°C

Gain 음 ^{15.0} 10 50 100 500 900 1300 1500 EBEQUENCY - MHz Noise Figure 50 10 100 500 900 1300 1500 FREQUENCY - MHz Power Output* 12.0 POWER OUTPUT 10.0 8.0 10 500 FREQUENCY - MHz *@ 1 dB Gain Compression Intercept Point - dBm 50 POINT 40 NTERCEPT 30 2ND ORDER 20 10 500 13001500 FREQUENCY - MHz **VSWR** 500 900 FREQUENCY - MHz


Outline Drawing: TO-8 *

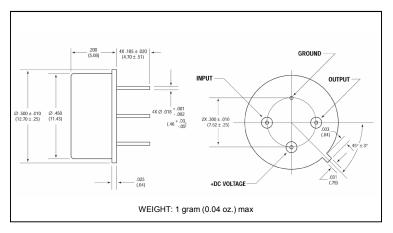

Outline Drawing: Surface Mount *

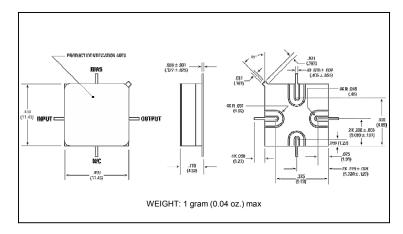

Outline Drawing: SMA Connectorized *

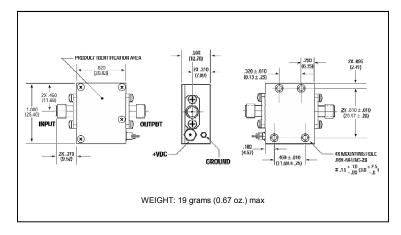

- * Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.
 - North America Tel: 800.366.2266 / Fax: 978.366.2266
 Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 - Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298