

## **GaAlAs Infrared Emitter**

# **OPE5194WK**

The OPE5194WK is GaAlAs infrared emitting diode that is designed for high radiant intensity and low forward voltage. This device is optimized for efficiency at emission wavelength 940nm and has a high radiant efficiency over a wide range of forward current. This device is packaged T1-3/4 plastic package and has narrow beam angle with lensed package and cup frame.

### **FEATURES**

- High-output power
- Narrow beam angle
- Available for pulse operating

#### **APPLICATIONS**

- Optical emitters
- Optical switches
- Smoke sensors
- IR remote control
- IR sound transmission

#### **STORAGE**

- Condition : 5°C~35°C,R.H.60%
- Terms : within 3 months from production date
- Remark : Once the package is opened, the products should be used within a day.
  - Otherwise, it should be keeping in a damp proof box with desiccants.
- \* Please take proper steps in order to secure reliability and safety in required conditions and environments for this device.

MAXIMUM RATINGS			(Ta=25°C)
Item	Symbol	Rating	Unit
Power Dissipation	P <sub>D</sub>	150	mW
Forward current	$I_{\rm F}$	100	mA
Pulse forward current <sup>*1</sup>	I <sub>FP</sub>	1.0	А
Reverse voltage	V <sub>R</sub>	5.0	V
Operating temp.	Topr.	-25~ +85	°C
Soldering temp. *2	Tsol.	260.	°C


<sup>\*1</sup>.Duty ratio = 1/100, pulse width=0.1ms.

<sup>\*2</sup>.Lead Soldering Temperature (2mm from case for 5sec.).


#### **ELECTRO-OPTICALCHARACTERISTICS**

(Ta=25°C) Conditions Item Symbol Min. Typ. Max. Unit Forward voltage  $V_F$  $I_F = 100 \text{mA}$ 1.4 1.7 V Reverse current  $V_R = 5V$ 10  $I_R$ μΑ Ct f = 1 MHzpF Capacitance 20 mW/sr Ie I<sub>F</sub>=100mA 100 Radiant intensity  $I_F = 50 \text{mA}$ Peak emission wavelength 940 nm р Spectral bandwidth 50%  $I_F = 50 \text{mA}$ 45 nm Half angle I<sub>F</sub>=100mA  $\pm 10$ deg.


2500

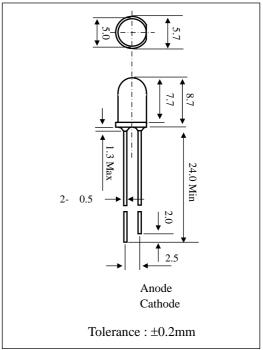








• RELATIVE RADIANT INTENSITY Vs. AMBIENT TEMP.







• RELATIVE RADIANT INTENSITY Vs. EMISSION WAVELENGTH.



• ANGULAR DISPLACEMENT Vs RELATIVE RADIANT INTENSITY

Ta=25

