





70-B3.8 SAW Filter Electrical Characteristic


Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.95	70	70.05
Insertion Loss	dB		25.89	28
1.5 dB Bandwidth	MHz	3.90	3.96	
50 dB Bandwidth	MHz		4.93	5
Passband Variation	dB		1.1	1.5
Ultimate Rejection	dB		50	55
Substrate Material		YZ LN		
Ambient Temperature	C	25		
Package Size		DIP3512(35.0×12.6×5.2mm ³)		

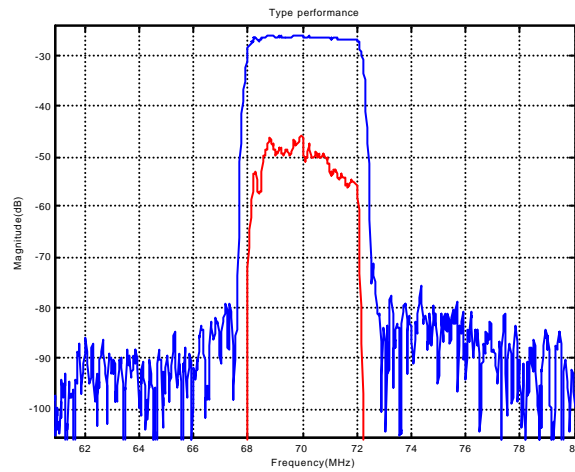

70-B3.8 SAW Filter Typical Performance

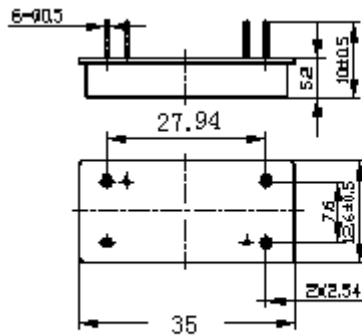

Package Outline

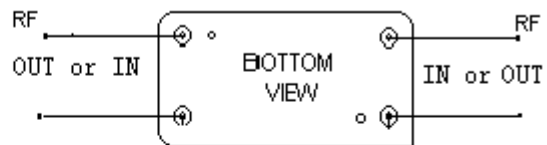

Source/Load Impedance=50ohm

Matching Configurate

Package