



# **BC846AW - BC848CW**

# NPN SURFACE MOUNT SMALL SIGNAL TRANSISTOR

## **Features**

Ideally Suited for Automatic Insertion Complementary PNP Types Available (BC856W-BC858W) For Switching and AF Amplifier Applications


Lead Free/RoHS Compliant (Note 3)

"Green" Device (Note 4 and 5)

## **Mechanical Data**

#### Case: SOT-323

Case Material: Molded Plastic, "Green" Molding Compound, Note 5. UL Flammability Classification Rating 94V-0 Moisture Sensitivity: Level 1 per J-STD-020C Terminals: Solderable per MIL-STD-202, Method 208 Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe). Pin Connections: See Diagram Marking Codes (See Table Below & Diagram on Page 2) Ordering & Date Code Information: See Page 2 Weight: 0.006 grams (approximate)



	SOT-323										
Dim	Min	Мах									
Α	0.25	0.40									
В	1.15	1.35									
С	2.00	2.20									
D	D 0.65 Nomina										
E	0.30	0.40									
G	1.20	1.40 2.20									
н	1.80										
J	0.0	0.10									
К	0.90	1.00									
L	0.25	0.40									
м	0.10	0.18									
	0	8									
All Dimensions in mm											

Marking Code (Note 2)										
Туре	Marking	Туре	Marking							
BC846AW	K1Q	BC847CW	K1M							
BC846BW	K1R	BC848AW	K1J, K1E, K1Q							
BC847AW	K1E, K1Q	BC848BW	K1K, K1F, K1R							
BC847BW	K1F, K1R	BC848CW	K1L, K1M							

## Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

Characteris	tic	Symbol	Value	Unit		
Collector-Base Voltage	BC846 BC847 BC848	V <sub>CBO</sub>	80 50 30	V		
Collector-Emitter Voltage	BC846 BC847 BC848	V <sub>CEO</sub>	65 45 30	V		
Emitter-Base Voltage	BC846, BC847 BC848	V <sub>EBO</sub>	6.0 5.0	V		
Collector Current		Ι <sub>C</sub>	100	mA		
Peak Collector Current		I <sub>CM</sub>	200	mA		
Peak Emitter Current		I <sub>EM</sub>	200	mA		
Power Dissipation (Note 1)		Pd	200	mW		
Thermal Resistance, Junction to A	Ambient (Note 1)	R <sub>JA</sub>	625	°C/W		
Operating and Storage Temperate	ure Range	T <sub>j</sub> , T <sub>STG</sub>	-65 to +150	°C		

Notes: 1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.

Current gain subgroup "C" is not available for BC846W.

3. No purposefully added lead.

4. Diodes Inc.'s "Green" Policy can be found on our website at http://www.diodes.com/products/lead\_free/index.php.

5. Product manufactured with date code 0609 (week 9, 2006) and newer are built with Green Molding Compound. Product manufactured prior t o date code 0609 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.



	1					
Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
Collector-Base Breakdown Voltage (Note 6) BC846 BC847 BC848	V <sub>(BR)CBO</sub>	80 50 30			V	$I_{\rm C} = 10$ A, $I_{\rm B} = 0$
Collector-Emitter Breakdown Voltage (Note 6) BC846 BC847 BC848	V <sub>(BR)CEO</sub>	65 45 30			V	I <sub>C</sub> = 10mA, I <sub>B</sub> = 0
Emitter-Base Breakdown Voltage BC846, BC847 (Note 4) BC848	V <sub>(BR)EBO</sub>	6 5	_	_	V	$I_{E} = 1 \ A, I_{C} = 0$
DC Current Gain Current Gain Group A B (Note 6) C	h <sub>FE</sub>	110 200 420	180 290 520	220 450 800	_	$V_{CE} = 5.0V, I_C = 2.0mA$
Collector-Emitter Saturation Voltage (Note 6)	V <sub>CE(SAT)</sub>	_	90 200	250 600	mV	$I_{C} = 10mA, I_{B} = 0.5mA$ $I_{C} = 100mA, I_{B} = 5.0mA$
Base-Emitter Saturation Voltage (Note 6)	V <sub>BE(SAT)</sub>	_	700 900	_	mV	$I_{C} = 10mA, I_{B} = 0.5mA$ $I_{C} = 100mA, I_{B} = 5.0mA$
Base-Emitter Voltage (Note 6)	V <sub>BE(ON)</sub>	580 —	660	700 770	mV	$V_{CE} = 5.0V, I_C = 2.0mA$ $V_{CE} = 5.0V, I_C = 10mA$
Collector-Cutoff Current (Note 6)	I <sub>СВО</sub> I <sub>СВО</sub>	_	_	15 5.0	nA μA	$V_{CB} = 30V$ $V_{CB} = 30V$ , $T_A = 150^{\circ}C$
Gain Bandwidth Product	f <sub>T</sub>	100	300	_	MHz	$V_{CE} = 5.0V$ , $I_C = 10mA$ , f = 100MHz
Collector-Base Capacitance	C <sub>CBO</sub>	—	3.0	4.5	pF	V <sub>CB</sub> = 10V, f = 1.0MHz
Noise Figure	NF		_	10	dB	$\label{eq:VCE} \begin{array}{l} V_{CE} = 5V, \ I_{C} = 200 \mu A, \\ R_{S} = 2.0k \\ f = 1.0kHz, \ \ f = 200Hz \end{array}$

### Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

# Ordering Information (Note 5 & 7)

Device	Packaging	Shipping
BC84xxW-7-F*	SOT-323	3000/Tape & Reel


\*xx = device type, e.g. BC846AW-7.

Note:

5. Product manufactured with date code 0609 (week 9, 2006) and newer are built with Green Molding Compound. Product manufactured prior to date code 0609 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

- 6. Short duration pulse test to minimize self-heating effect.
- 7. For Packaging Details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.


## **Marking Information**



 $\begin{array}{l} XXX = Product \mbox{ Type Marking Code (See Page 1), e.g. K1Q = BC846AW} \\ YM = Date \mbox{ Code Marking} \\ Y = Year \mbox{ ex: } N = 2002 \\ M = Month \mbox{ ex: } 9 = September \end{array}$ 

Date Code Key

Year	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	J	К	L	М	N	Р	R	S	Т	U	V	W	Х	Y	Z
Ν	Nonth		Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	0	ct	Nov	Dec
(	Code		1	2	3	4	5	6	7	8	9	(	)	Ν	D

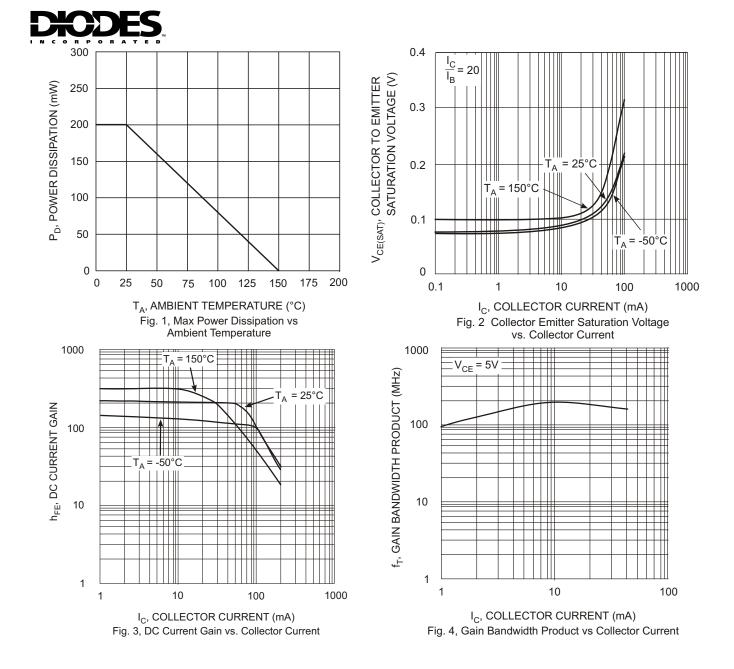

#### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

#### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.