

May 2000 Revised November 2003

## **FSA266 • NC7WB66**

# TinyLogic® Low Voltage UHS Dual SPST Normally Open Analog Switch or 2-Bit Bus Switch

#### **General Description**

The FSA266 or NC7WB66 is an ultra high-speed (UHS) dual single-pole/single-throw (SPST) analog switch or 2-bit bus switch. The device is fabricated with advanced submicron CMOS technology to achieve high speed enable and disable times and low On Resistance over a broad  $\rm V_{CC}$  range. The device is specified to operate over the 1.65 to 5.5V  $\rm V_{CC}$  operating range. The device is organized as a dual switch with independent CMOS compatible switch enable (OE) controls. When OE is HIGH, the switch is ON and Port A is connected to Port B. When OE is LOW, the switch is OPEN and a high-impedance state exists between the two ports. The enable inputs tolerate voltages up to 5.5V independent of the  $\rm V_{CC}$  operating range.

#### **Features**


- Useful in both analog and digital applications
- Space saving US8 surface mount package
- MicroPak™ leadless package
- Typical 7 $\Omega$  On Resistance @ 5V V<sub>CC</sub>
- Broad V<sub>CC</sub> operating range: 1.65V to 5.5V
- Rail-to-Rail signal handling
- Power down high impedance control inputs
- Control inputs are overvoltage tolerant
- Control inputs are CMOS compatible
- >300 MHz -3dB bandwidth

#### **Ordering Code:**


		Product		
Order	Package	Code	Package Description	Supplied As
Number	Number	Top Mark		
FSA266K8X	MAB08A	WB66	8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide	3K Units on Tape and Reel
FSA266L8X	MAC08A	P4	8-Lead MicroPak, 1.6 mm Wide	5K Units on Tape and Reel
NC7WB66K8X	MAB08A	WB66	8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide	3K Units on Tape and Reel
NC7WB66L8X	MAC08A	P4	8-Lead MicroPak, 1.6 mm Wide	5K Units on Tape and Reel

 $\label{eq:total_cond} \mbox{TinyLogio} \mbox{$\mathbb{B}$ is a registered trademark of Fairchild Semiconductor Corporation.} \\ \mbox{MicroPak}^{\mbox{$\mathbb{M}$}} \mbox{$\mathbb{M}$ is a trademark of Fairchild Semiconductor Corporation.} \\$ 

# Logic Symbol



# **Analog Symbol**



# **Pin Descriptions**

Pin Names	Description
A	Switch Port A
В	Switch Port B
OE	Control Input


## **Function Table**

Switch Enable Input (OE)	Function
L	Disconnect
Н	B Connected to A


H = HIGH Logic Level L = LOW Logic Level

# **Connection Diagrams**

#### Pin Assignments for US8



#### Pad Assignments for MicroPak



(Top Thru View)

## **Absolute Maximum Ratings**(Note 1)

-0.5V to +7.0V Supply Voltage (V<sub>CC</sub>) DC Switch Voltage (V<sub>S</sub>) -0.5 V to  $\text{V}_{\text{CC}} + 0.5 \text{V}$ DC Input Voltage (V<sub>IN</sub>) (Note 2) -0.5V to +7.0V

DC Input Diode Current

 $@ (I_{IK}) V_{IN} < 0V$ -50 mA DC Switch Output Current (I<sub>OUT</sub>) ±128 mA DC V<sub>CC</sub> or Ground Current (I<sub>CC</sub>/I<sub>GND</sub>) ±100 mA Storage Temperature Range (T<sub>STG</sub>) -65°C to +150°C

Junction Lead Temperature

under Bias (T<sub>J</sub>)

Junction Lead Temperature (T<sub>L</sub>)

(Soldering, 10 Seconds)

Power Dissipation (P<sub>D</sub>) @ +85°C

SC70-6

## **Recommended Operating** Conditions (Note 3)

Supply Voltage (V<sub>CC</sub>) 1.65V to 5.5V 0V to 5.5V Control Input Voltage (V<sub>IN</sub>) Switch Input Voltage (V<sub>IN</sub>) 0V to  $V_{CC}$ Switch Output Voltage (V<sub>OUT</sub>) 0V to  $V_{CC}$ -40°C to +85°C Operating Temperature (T<sub>A</sub>)

Input Rise and Fall Time  $(t_r,\,t_f)$ 

Control Input  $V_{CC} = 1.65V-2.7V$ 0 ns/V to 20 ns/V Control Input  $V_{CC} = 3.0V - 3.6V$ 0 ns/V to 10 ns/V Control Input  $V_{CC} = 4.5V - 5.5V$ 0 ns/V to 5 ns/V  $\,$ Thermal Resistance ( $\theta_{JA}$ ) 250°C/W

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

Note 3: Unused inputs must be held HIGH or LOW. They may not float.

#### **DC Electrical Characteristics**

Symbol	Parameter	V <sub>CC</sub>	Т	A = +25°C	;	T <sub>A</sub> = -40°C	$T_A = -40^{\circ}C$ to $+85^{\circ}C$		Conditions
Symbol	Parameter	(V)	Min	Тур	Max	Min	Max	Units	Conditions
V <sub>IH</sub>	HIGH Level Input Voltage	1.65 to 1.95	0.75 V <sub>CC</sub>			0.75 V <sub>CC</sub>		V	
		2.3 to 5.5	0.7 V <sub>CC</sub>			0.7 V <sub>CC</sub>		V	
V <sub>IL</sub>	LOW Level Input Voltage	1.65 to 1.95			0.25 V <sub>CC</sub>		0.25V <sub>CC</sub>	V	
		2.3 to 5.5			0.3 V <sub>CC</sub>		0.3 V <sub>CC</sub>	v	
I <sub>IN</sub>	Input Leakage Current	0 to 5.5			±0.1		±1.0	μΑ	$0 \le V_{IN} \le 5.5V$
I <sub>OFF</sub>	Switch OFF Leakage Current	1.65 to 5.5			±0.1		±1.0	μΑ	$0 \le A, B \le V_{CC}$
R <sub>ON</sub>	Switch On Resistance			6	10		10		$V_1 = 0V, I_0 = 30 \text{ mA}$
	(Note 4)	4.5		7	13.5		13.5	Ω	$V_I = 2.4V, I_O = -30 \text{ mA}$
				6	10		10		$V_1 = 4.5V$ , $I_0 = -30 \text{ mA}$
		3.0		7.5	15		15	Ω	$V_{I} = 0V, I_{O} = 24 \text{ mA}$
		3.0		8.5	15		15	52	$V_1 = 3V, I_0 = -24 \text{ mA}$
		2.3		9	20		20	Ω	$V_I = 0V$ , $I_O = 8$ mA
		2.3		10.5	20		20	52	$V_1 = 2.3V$ , $I_0 = -8 \text{ mA}$
		1.65		12.5	30		30	Ω	$V_I = 0V$ , $I_O = 4$ mA
				17	30		30	. 52	$V_I = 1.65V, I_O = -4 \text{ mA}$
I <sub>CC</sub>	Quiescent Supply Current	5.5			1		10	μА	$V_{IN} = V_{CC}$ or GND
	All Channels ON or OFF	5.5			ı		10		$I_{OUT} = 0$
	Analog Signal Range	V <sub>CC</sub>	0		V <sub>CC</sub>	0	V <sub>CC</sub>	V	
RRange	On Resistance Over	4.5		8	15		15		$I_O = -30 \text{ mA}, \ 0 \le V_I \le V_{CC}$
	Signal Range	3.0		15	30		30	Ω	$I_O = -24 \text{ mA}, \ 0 \le V_I \le V_{CC}$
	(Note 4)(Note 5)	2.3		45	75		75	52	$I_O = -8 \text{ mA}, \ 0 \le V_I \le V_{CC}$
		1.65		150	275		275		$I_O = -4 \text{ mA}, \ 0 \le V_I \le V_{CC}$
$\Delta R_{ON}$	On Resistance Match	4.5		0.2					$I_O = -30 \text{ mA}, V_I = 3.15$
	Between Channels	3.0		0.2				Ω	$I_O = -24 \text{ mA}, V_I = 2.1$
	(Note 4)(Note 7)	2.3		0.5				5.2	$I_O = -8 \text{ mA}, V_I = 1.6$
		1.65		0.6					$I_O = -4 \text{ mA}, V_I = 1.15$

+150°C

+260°C

250 mW

## DC Electrical Characteristics (Continued)

Symbol	Parameter	V <sub>CC</sub>	T <sub>A</sub> = +25°C		T <sub>A</sub> = -40°C	C to +85°C	Units	Conditions	
Cymbol	i arameter	(V)	Min	Тур	Max	Min	Max	Oilles	Conditions
R <sub>flat</sub>	On Resistance Flatness	4.5		2.5	6		6		$I_O = -30 \text{ mA}, \ 0 \le V_I \le V_{CC}$
	(Note 4)(Note 5)(Note 6)	3.0		8	17.5		17.5		$I_O = -24 \text{ mA}, \ 0 \le V_I \le V_{CC}$
		2.3		33	60		60		$I_O = -8 \text{ mA}, \ 0 \le V_I \le V_{CC}$
		1.65		135	250		250		$I_{O} = -4 \text{ mA}, 0 \le V_{I} \le V_{CC}$

Note 4: Measured by the voltage drop between A and B pins at the indicated current through the switch. On Resistance is determined by the lower of the voltages on the two (A or B) pins.

Note 5: Guaranteed by design.

Note 6: Flatness is defined as the difference between the minimum and maximum value of ON Resistance over the specified range of conditions.

Note 7:  $\Delta R_{ON} = R_{ON} \text{ max} - R_{ON} \text{ min measured at identical } V_{CC}$ , temperature and voltage levels.

## **AC Electrical Characteristics**

Symbol	Parameter	V <sub>CC</sub>	$T_A = -40$ °C to $+85$ °C			Units	Conditions	Figure	
Symbol	Parameter	(V)	Min	Тур	Max	Units	Conditions	Number	
$t_{PHL}$ , $t_{PLH}$	Propagation Delay Bus-to-Bus	4.5 to 5.5		0.35	1.0				
	(Note 8)	3.0 to 3.6		0.7	1.5	ns	$V_I = OPEN$	Figures	
		2.3 to 2.7		1.1	2.5	115	$C_L = 50 \text{ pF}, \text{ RU} = \text{RD} = 500\Omega$	2, 1	
		1.65 to 1.95		2.0	4.0				
$t_{PZL}$ , $t_{PZH}$	Output Enable Time	4.5 to 5.5	0.8	2.0	3.2				
	Turn on Time	3.0 to 3.6	1.2	2.5	3.9	ns	$V_I = 0V$ for $t_{PZH}$	Figures	
		2.3 to 2.7	1.5	3.2	5.6	115	$V_I = 2 \times V_{CC}$ for $t_{PZL}$	2, 1	
		1.65 to 1.95	2.5	5.7	10		$C_L = 50 \text{ pF}, \text{ RU} = \text{RD} = 500\Omega$		
t <sub>PLZ</sub> , t <sub>PHZ</sub>	Output Disable Time	4.5 to 5.5	8.0	2.6	4.1				
	Turn Off Time	3.0 to 3.6	1.5	3.4	5.0	ns	$V_I = 0V$ for $t_{PHZ}$	Figures 2, 1	
		2.3 to 2.7	2.0	4.2	6.9	115	$V_I = 2 \times V_{CC}$ for $t_{PLZ}$		
		1.65 to 1.95	3.0	6.2	10.5		$C_L = 50 \text{ pF}, \text{ RU} = \text{RD} = 500\Omega$		
Q	Charge Injection (Note 9)	1.65 to 5.5				рC	$C_L = 0.1 \text{ nF}, V_{GEN} = 0V,$	Figure 3	
							$R_{GEN} = 0 \Omega$ , $f = 1 MHz$		
OIRR	Off Isolation (Note 10)	1.65 to 5.5		-55		dB	$R_L = 50 \Omega, C_L = 5 pF,$	Figure 4	
							f = 10 MHz		
Xtalk	Crosstalk	1.65 to 5.5		-70		dB	$R_L = 50 \Omega$ , $C_L = 5 pF$ ,	Figure 5	
							f = 10 MHz		
BW	-3dB Bandwidth	1.65 to 5.5		>300		MHz	$R_L = 50 \Omega$	Figure 8	
THD	Total Harmonic Distortion						$R_L = 600\Omega$		
	(Note 9)	5		.016		%	0.5 V <sub>P-P</sub>		
		1					f = 600 Hz to 20 KHz		


Note 8: This parameter is guaranteed by design. The switch contributes no propagation delay other than the RC delay of the On Resistance of the switch and the 50 pF load capacitance.

Note 9: Guaranteed by design.


Note 10: Off Isolation =  $20 \log_{10} [V_A/V_{Bn}]$ 

## Capacitance

Symbol	Parameter		Max	Units	Conditions	Figures
C <sub>IN</sub>	Control Pin Input Capacitance	2.5		pF	V <sub>CC</sub> = 0V	
C <sub>I/O</sub> (OFF)	Switch Port Off Capacitance	5		pF	V <sub>CC</sub> = 5.0V	Figure 6
C <sub>I/O</sub> (ON)	Switch Port Capacitance when Switch is Enabled	10		pF	V <sub>CC</sub> = 5.0V	Figure 7

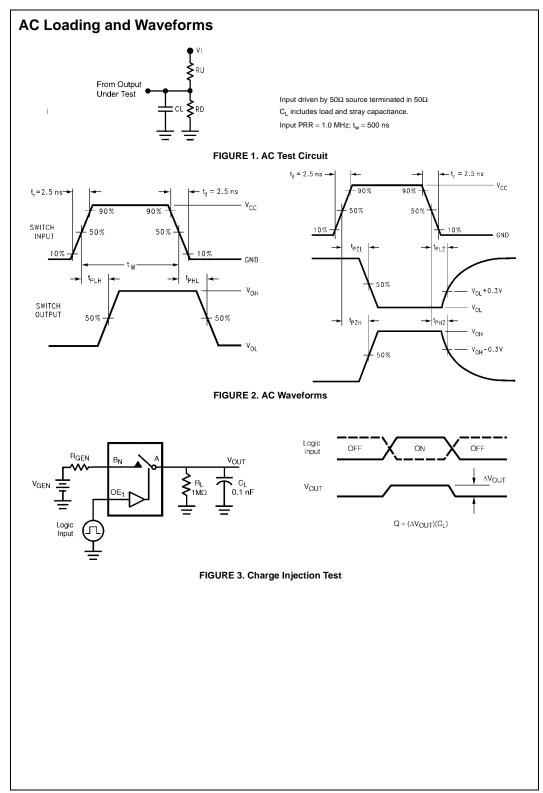

# AC Loading and Waveforms (Continued)



Signal Generator OdBm

Logic Input OE2


GND

Analyzer

5002

FIGURE 4. Off Isolation

FIGURE 5. Crosstalk








FIGURE 7. Channel On Capacitance





FIGURE 8. Bandwidth

# **Tape and Reel Specification**

TAPE FORMAT for US8

Package	Tape	Number	Cavity	Cover Tape	
Designator	Section	Cavities	Status	Status	
	Leader (Start End)	125 (typ)	Empty	Sealed	
K8X	Carrier	250	Filled	Sealed	
	Trailer (Hub End)	75 (typ)	Empty	Sealed	


#### TAPE DIMENSIONS inches (millimeters)

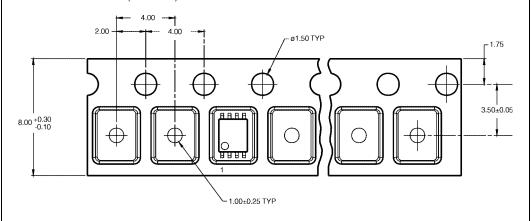

TAPE FORMAT for MicroPak


Package	Tape	Number	Cavity	Cover Tape Status	
Designator	Section	Cavities	Status		
	Leader (Start End)	125 (typ)	Empty	Sealed	
L8X	Carrier	250	Filled	Sealed	
	Trailer (Hub End)	75 (typ)	Empty	Sealed	

#### TAPE DIMENSIONS inches (millimeters)

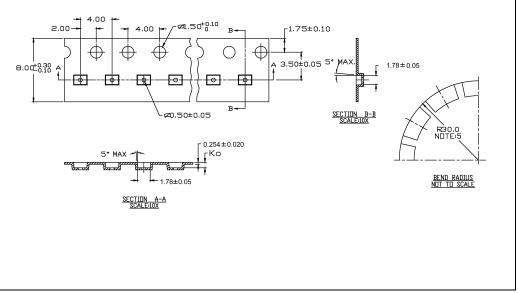


# Tape and Reel Specification (Continued)


REEL DIMENSIONS inches (millimeters)

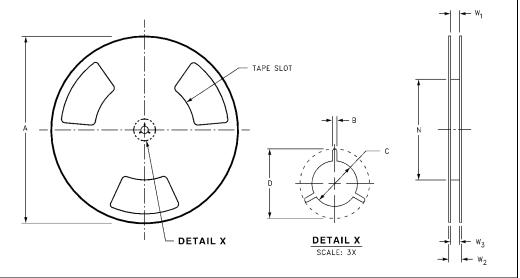


Tape Size	Α	В	С	D	N	W1	W2	W3
0	7.0	0.059	0.512	0.795	2.165	0.331 + 0.059/-0.000	0.567	W1 + 0.078/-0.039
8 mm	(177.8)	(1.50)	(13.00)	(20.20)	(55.00)	(8.40 + 1.50/-0.00)	(14.40)	(W1 + 2.00/-1.00)


# Physical Dimensions inches (millimeters) unless otherwise noted






#### LAND PATTERN RECOMMENDATION







#### NOTES:


- A. CONFORMS TO JEDEC REGISTRATION MO-187
   B. DIMENSIONS ARE IN MILLIMETERS.
   C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.

DETAIL A

#### MAB08AREVC

8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide Package Number MAB08A

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

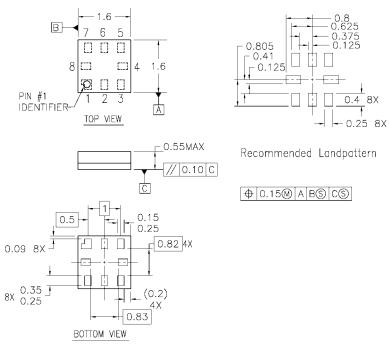

#### Notes:

- 1. PACKAGE REGISTRATION WITH JEDEC IS ANTICIPATED
- 2. DIMENSIONS ARE IN MILLIMETERS
- 3. DRAWING CONFORMS TO ASME Y.14M-1994

MAC08AREVB

8-Lead MicroPak, 1.6 mm Wide Package Number MAC08A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com