EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

0603 Package Chip LED (0.4mm Height)

19-217/R6C-P1Q2/3T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint Version.

Descriptions

- The 19-217 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Dov4 N.	Chip	E:44 - 1 C-1	Resin Color	
Part No.	Material	Emitted Color		
19-217/R6C-P1Q2/3T	AlGaInP	Brilliant Red	Water Clear	



Everlight Electronics Co., Ltd. Device No:SZDSE-197-R17

http://www.everlight.com Prepared date:21-Jul -2007

Prepared by: Han Wenfeng

LifecyclePhase:正式發行

: 1

Revision


Release Date:2008-09-20 00:16:11.0

Page: 1 of 10

Expired Period: Forever

Rev.1

Package Outline Dimensions

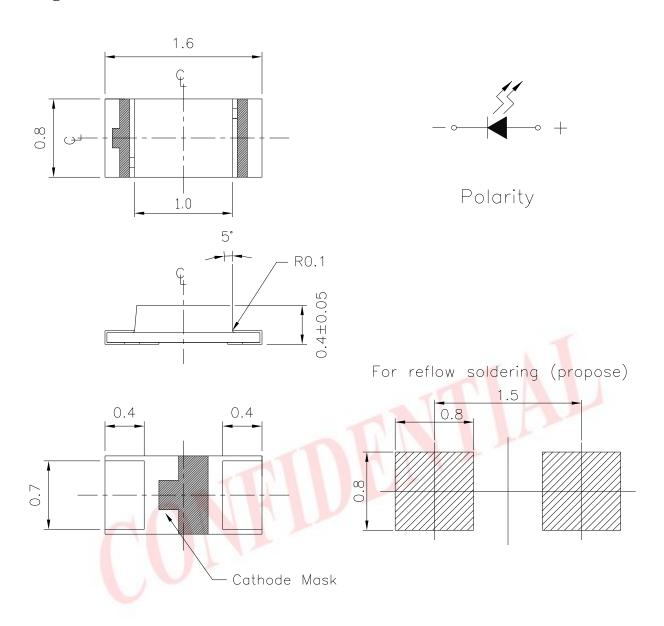

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No:SZDSE-197-R17

Revision : 1

LifecyclePhase:正式發行

http://www.everlight.com Prepared date:21-Jul -2007 Rev.1

Page: 2 of 10

Prepared by: Han Wenfeng Release Date:2008-09-20 00:16:11.0



Absolute Maximum Ratings (Ta=25

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	$ m I_{FP}$	60	mA
Power Dissipation	P_d	60	mW
Electrostatic Discharge(HBM)	ESD	2000	V
Operating Temperature	Topr	-40 ~ +85	
Storage Temperature	Tstg	-40 ~ +90	
Soldering Temperature	Tsol	8	or 10 sec. 3 sec.

Electro-Optical Characteristics (Ta=25

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	$I_{\rm v}$	45.0		112	mcd	
Viewing Angle	2 1/2	K-1	120		deg	
Peak Wavelength	p		632		nm	
Dominant Wavelength	d		624		nm	$I_F=20mA$
Spectrum Radiation Bandwidth			20		nm	
Forward Voltage	V_{F}	1.7	2.0	2.4	V	
Reverse Current	I_R			10	μA	V _R =5V

Notes:

: 1

Revision

1.Tolerance of Luminous Intensity ±11%

Everlight Electronics Co., Ltd.

http://www.everlight.com Prepared date:21-Jul -2007 Rev.1 Page: 3 of 10

Device No:SZDSE-197-R17

Prepared by: Han Wenfeng Release Date: 2008-09-20 00:16:11.0

LifecyclePhase:正式發行



Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
P1	45.0	57.0	mcd	I _F =20mA
P2	57.0	72.0		
Q1	72.0	90.0		
Q2	90.0	112		

Notes:

1.Tolerance of Luminous Intensity ±11%



Everlight Electronics Co., Ltd.

http://www.everlight.com Prepared date:21-Jul -2007 Rev.1 Page: 4 of 10

Device No:SZDSE-197-R17


: 1


Revision


7 Prepared by: Han Wenfeng Release Date:2008-09-20 00:16:11.0


LifecyclePhase:正式發行 Expired Period: Forever


Typical Electro-Optical Characteristics Curves














Everlight Electronics Co., Ltd.

Device No:SZDSE-197-R17

Revision: 1

LifecyclePhase:正式發行

http://www.everlight.com

Rev.1

Page: 5 of 10

Prepared date:21-Jul -2007


7 Prepared by: Han Wenfeng Release Date:2008-09-20 00:16:11.0

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

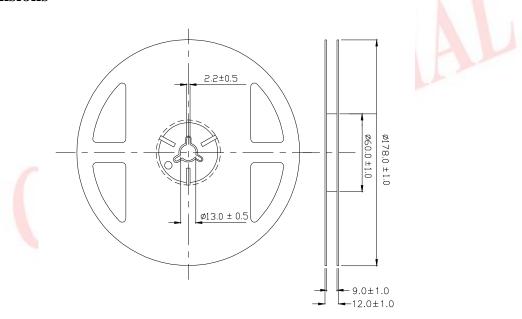

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No:SZDSE-197-R17

Revision: 1

:1

LifecyclePhase:正式發行

http://www.everlight.com

Rev.1


Page: 6 of 10

Prepared date:21-Jul -2007

7 Prepared by: Han Wenfeng Release Date:2008-09-20 00:16:11.0




Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

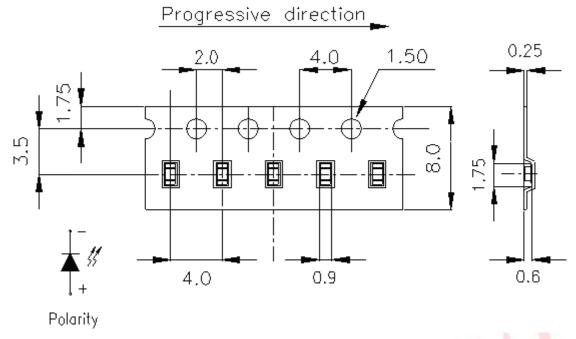

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

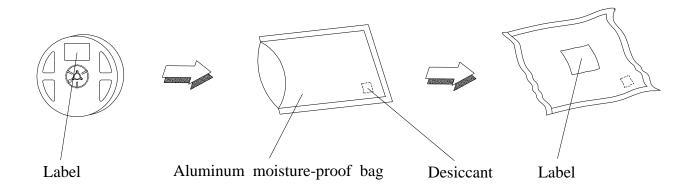

Everlight Electronics Co., Ltd.

Device No:SZDSE-197-R17

Revision: 1

LifecyclePhase:正式發行

http://www.everlight.com Prepared date:21-Jul -2007 Rev.1

Page: 7 of 10

7 Prepared by: Han Wenfeng Release Date:2008-09-20 00:16:11.0



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp.: 260 ±5 Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H: +100 15min 5 min L: -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100 5min 10 sec L:-10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 / 85%RH	1000 Hrs.	22 PCS.	0/1
	(O)				

Everlight Electronics Co., Ltd.

Prepared date:21-Jul -2007

http://www.everlight.com

Page: 8 of 10 Rev.1

Device No:SZDSE-197-R17

Prepared by: Han Wenfeng Release Date:2008-09-20 00:16:11.0

: 1 LifecyclePhase:正式發行


Revision

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30 or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 60±5 for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

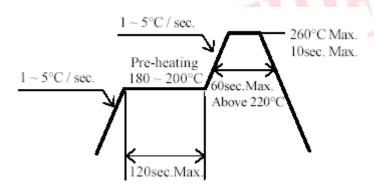

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd.

Prepared date:21-Jul -2007

Rev.1

Page: 9 of 10

Device No:SZDSE-197-R17

http://www.everlight.com

Prepared by: Han Wenfeng Release Date:2008-09-20 00:16:11.0

Revision




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

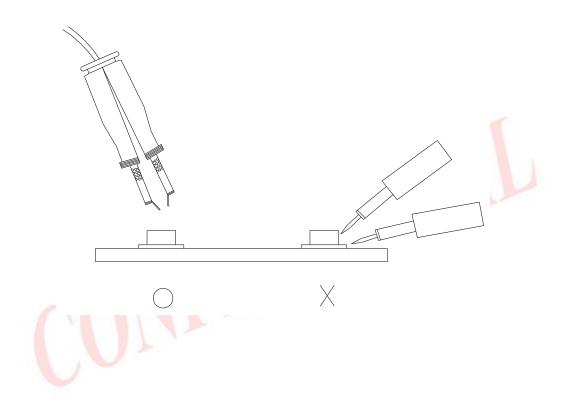

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd.

Device No:SZDSE-197-R17

Rev.1

Page: 10 of 10

http://www.everlight.com Prepared date:21-Jul -2007

Prepared by: Han Wenfeng

Release Date: 2008-09-20 00:16:11.0

Expired Period: Forever

: 1

Revision