

BAS70 / A / C / S 👫


## SURFACE MOUNT SCHOTTKY BARRIER DIODE

## **Features**


- Low Turn-on Voltage
- Fast Switching
- PN Junction Guard Ring for Transient and **ESD** Protection
- **Designed for Surface Mount Application**
- Plastic Material UL Recognition Flammability Classification 94V-O

## **Mechanical Data**

- Case: SOT-23, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: See Diagrams Below
- Weight: 0.008 grams (approx.)
- Mounting Position: Any
- Lead Free: For RoHS / Lead Free Version, Add "-LF" Suffix to Part Number, See Page 5



G



L

SO1-23			
Dim	Min	Max	
Α	0.37	0.51	
В	1.19	1.40	
С	2.10	2.50	
D	0.89	1.05	
E	0.45	0.61	
G	1.78	2.05	
Н	2.65	3.05	
J	0.013	0.15	
к	0.89	1.10	
L	0.45	0.61	
М	0.076	0.178	
All Dimensions in mm			









TOP VIEW BAS70 Marking: A70 TOP VIEW

TOP VIEW

BAS70A Marking: A72 BAS70C Marking: A73 BAS70S Marking: A74


## Maximum Ratings and Electrical Characteristics, Single Diode @TA=25°C unless otherwise specified


Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	Vrrm Vrwm Vr	70	V
Forward Continuous Current (Note 1)	lF	200	mA
Forward Surge Current (Note 1) @ t < 1.0s	IFSM	600	mA
Power Dissipation (Note 1)	Pd	200	mW
Typical Thermal Resistance, Junction to Ambient Air (Note 1)	RθJA	625	°C/W
Operating and Storage Temperature Range	Тј, Тѕтс	-55 to +125	°C

Note: 1. Device on fiberglass substrate.


# Maximum Ratings and Electrical Characteristics, Single Diode @T\_=25°C unless otherwise specified

Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
Reverse Breakdown Voltage	V(BR)R	70	—	_	V	@ I <sub>R</sub> = 10µA
Forward Voltage	Vf	_	_	410 750 1000	mV	
Reverse Leakage Current	IR	—	20	100	nA	@ $V_R = 50V$ , tp < 300 $\mu$ s
Junction Capacitance	Cj	_	1.5	2.0	pF	V <sub>R</sub> = 0V, f = 1.0MHz
Reverse Recovery Time	trr	_	_	5.0	nS	$I_F$ = 10mA through $I_R$ = 10mA to $I_R$ = 1.0mA, $R_L$ = 100 $\Omega$

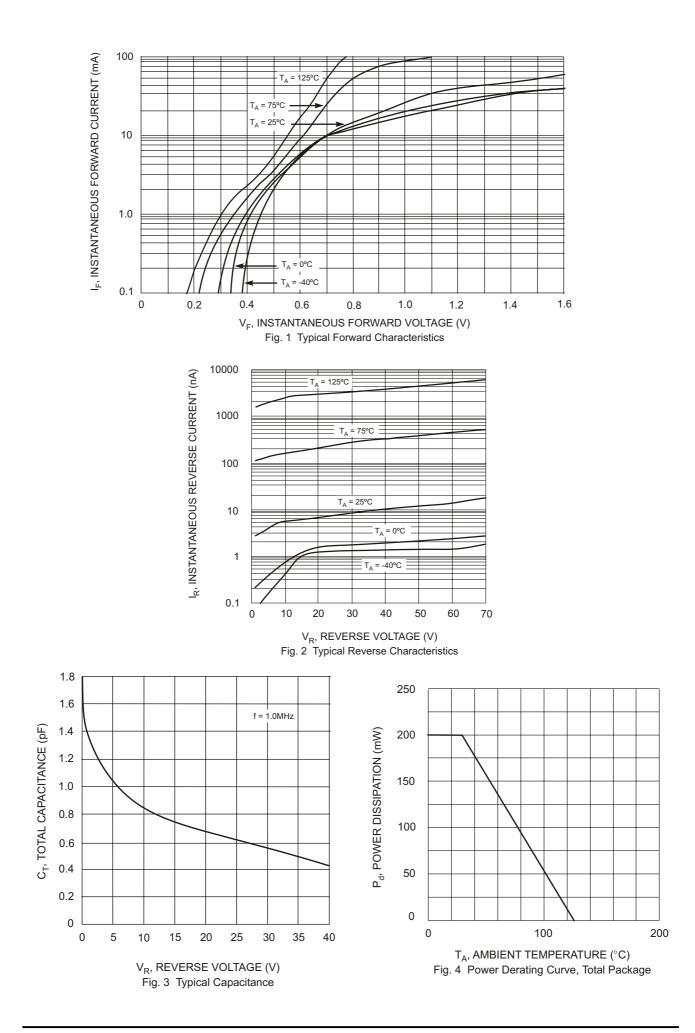

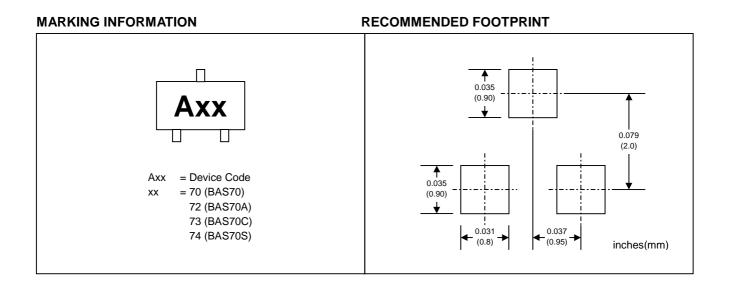

### **PACKAGING INFORMATION**

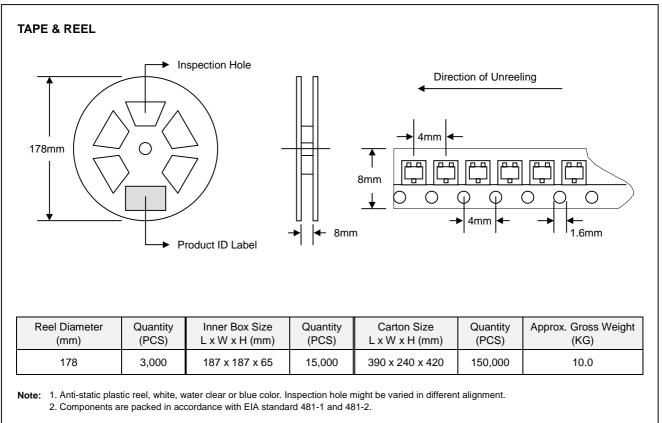

#### **ORDERING INFORMATION**

Product No.	Package Type	Shipping Quantity
BAS70-T1	SOT-23	3000/Tape & Reel
BAS70A-T1	SOT-23	3000/Tape & Reel
BAS70C-T1	SOT-23	3000/Tape & Reel
BAS70S-T1	SOT-23	3000/Tape & Reel

1. Shipping quantity given is for minimum packing quantity only. For minimum

order quatity, please consult the Sales Department. To order RoHS / Lead Free version (with Lead Free finish), add "-LF" suffix to part number above. For example, BAS70-T1-LF. 2.

Won-Top Electronics Co., Ltd (WTE) has checked all information carefully and believes it to be correct and accurate. However, WTE cannot assume any responsibility for inaccuracies. Furthermore, this information does not give the purchaser of semiconductor devices any license under patent rights to manufacturer. WTE reserves the right to change any or all information herein without further notice.

WARNING: DO NOT USE IN LIFE SUPPORT EQUIPMENT. WTE power semiconductor products are not authorized for use as critical components in life support devices or systems without the express written approval.

Won-Top Electronics Co., Ltd. No. 44 Yu Kang North 3rd Road, Chine Chen Dist., Kaohsiung, Taiwan Phone: 886-7-822-5408 or 886-7-822-5410 Fax: 886-7-822-5417 Email: sales@wontop.com Internet: http://www.wontop.com

We power your everyday.