

# Ultra-low Ohmic Resistors for Current Detection

# **PMR50**

#### Features

- 1) Ultra low-ohmic resistance range  $(1m\Omega^{\sim})$
- 2) Improved current detection accuracy by trimming-less structure. Highly recommended for large current / High speed switching circuit.
- 3) Completely Pb free product
- 4) ISO9001- / ISO/TS 16949- approved

### Rating

Item	Conditions	Specifications	
Rated power	For resistors operated at the ambient temperature in excess of 70 °C, the load shall be derated in accordance with Fig.1	1W at 70°C	
Rated voltage Rated current	Rated voltage and current are determined from the following.		
Nominal resistance	See <u>Table 1.</u>		
Operating temperature		−55°C to +155°C	

Table.1


$\mathop{RESISTANCE}_{(m\Omega)}$	TOLERANCE	SPECIAL CODE	TEMPERATURE COEFFICIENT (ppm / °C)	
1,2,3,4	F (±1%)	V	1400	
5,6,7,8,9,10	J (±5%)	U	±100	

PMR50 Data Sheet

# Characteristics

ltem -	Guaranteed value  Resistor type	Test conditions (JIS C 5201-1)  JIS C 5201-1 4.5  Measuring method : Measure under terminations by 4 probes.	
Resistance	F : ±1% J : ±5%		
		Fig.2 (Under terminations)	
Variation of resistance with temperature	See Table.1	JIS C 5201-1 4.8 Measurement : 25 / -55 / +25 / +125°C	
Overload	$\pm \ (2.0\%\text{+}0.0005\Omega)$	JIS C 5201-1 4.13 Rated voltage (current) ×2.5, 2s.	
Solderability	A new uniform coating of minimum of 95% of the surface being immersed and no soldering damage.	JIS C 5201-1 4.17 Rosin-Ethanol (25%WT) Soldering condition : 235±5°C Duration of immersion : 2.0±0.5s.	
Resistance to soldering heat	$\pm  (1.0\% + 0.0005 \Omega)$ No remarkable abnormality on the appearance.	JIS C 5201-1 4.18 Soldering condition : 260±5°C Duration of immersion : 10±1s.	
Rapid change of temperature	$\pm (1.0\% + 0.0005\Omega)$	JIS C 5201-1 4.19 Test temp. : –55°C to +125°C 5cyc	
Damp heat, steady state	$\pm \left(3.0\% \text{+} 0.0005\Omega\right)$	JIS C 5201-1 4.24 40°C, 93%RH Test time : 56days	
Endurance at 70°C	$\pm \left(3.0\% \text{+} 0.0005\Omega\right)$	JIS C 5201-1 4.25.1 Rated power, 70°C 1.5h : ON – 0.5h : OFF Test time : 1,000h to 1,048h	
Endurance	$\pm \left(3.0\%\text{+}0.0005\Omega\right)$	JIS C 5201-1 4.25.3 155°C Test time: 1,000h to 1,048h	
Component Solvent Resistance	$\pm  (0.5\% \text{+} 0.0005 \Omega)$	JIS C 5201-1 4.29 23°C±5°C Solvent : 2-propanol	
Bend strength of the end face plating	Without open.	JIS C 5201-1 4.33	

#### Dimensions&Construction

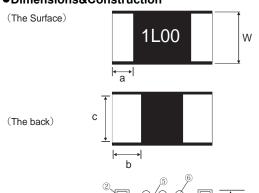


Resistance -	Measure						
	L ± 0.20	W ± 0.20	t ± 0.15	a ± 0.20	b ± 0.20	c ± 0.20	
1mΩ	5.00		0.52		1.85		
$2 m \Omega$			0.42		1.30		
$3 \text{m} \Omega$			0.52		1.40		
$4 m\Omega$			0.42	0.50	1.40	1.95	
$5 \text{m}\Omega$		2.50	0.42		1.05		
$6 m \Omega$		2.00	0.32		1.40		
$7 \text{m}\Omega$			0.32		1.10		
$8$ m $\Omega$			0.32		0.90		
$9 m\Omega$			0.32		1.10		
10mΩ			0.32		0.90		
No. Material				1		(Unit:mm	

No. Material

① Resistive metal element(Ni-Cu/Ni-Cr Alloy)
② Primary electrode(Cu)
③ Middle electrode(Ni)
④ External electrode(Sn)
⑤ Overcoat(Resin:Black)
⑥ Marking(Resin:Yellow)

## ●Part No. Explanation

(The cross section)

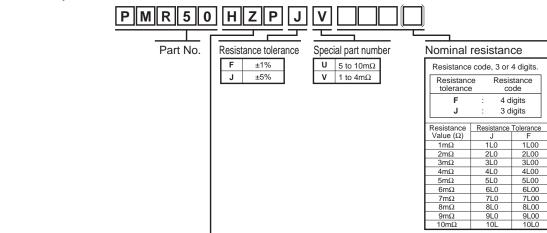


Packaging Specifications Code

	Tackaging Openications odde								
	Dowt No.	Cada	Resistance	e tolerance	Packaging specifications	Reel	Basic ordering unit (pcs)		
	Part No.	Code	J(±5%)	F(±1%)					
PMR50		HZP	0	0	Embossed tape (4mm Pitch)	φ180mm (7in.)	2,000		

Reel (\phi180) : Compatible with JEITA standard "EIAJ ET-7200B"

#### Packaging

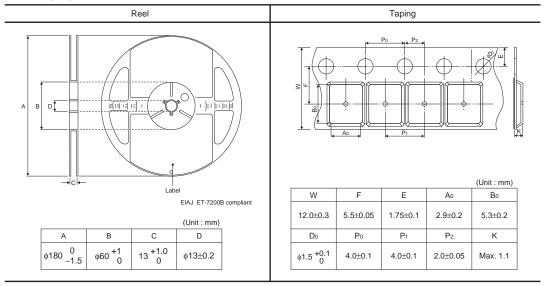

Standard product

#### Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

# ROHM Customer Support System

http://www.rohm.com/contact/