

Feb 2008



- Pletronics' SM77M Series is a quartz crystal controlled precision square wave generator with a CMOS output.
- The package is designed for high density surface mount designs.
- This is a low cost mass produced oscillator.
- Tape and Reel or cut tape packaging is available.
- 0.8 to 70 MHz
- 5 x 7 mm LCC Ceramic Package
- Enable/Disable
- Disable function includes low standby power mode
- Low Jitter
- Optimized for low power applications (battery)

# Pletronics Inc. certifies this device is in accordance with the RoHS 6/6 (2002/95/EC) and WEEE (2002/96/EC) directives.

Pletronics Inc. guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's Weight of the Device: 0.17 grams Moisture Sensitivity Level: 1 As defined in J-STD-020C Second Level Interconnect code: e4

#### **Absolute Maximum Ratings:**

Parameter	Unit
V <sub>cc</sub> Supply Voltage	-0.5V to +7.0V
Vi Input Voltage	-0.5V to V <sub>cc</sub> + 0.5V
Vo Output Voltage	-0.5V to V <sub>cc</sub> + 0.5V
lo Output Current	+25 mA to -25 mA

### **Thermal Characteristics**

The maximum die or junction temperature is 155°C

The thermal resistance junction to board is 30 to 50°C/Watt depending on the solder pads, ground plane and construction of the PCB.



Feb 2008

#### PART NUMBER:

SM77	45	Μ	Ε	X	- 50.0M	-XX		Part Marking:
							Packaging code or blank T250 = 250 per Tape and Reel T500 = 500 per Tape and Reel T1K = 1000 per Tape and Reel	PLE SM77 FF.FFF M • YMDXX
							Frequency in MHz	or
							Supply Voltage V <sub>cc</sub> X = 1.8V <u>+</u> 10%	PLE SM77 <i>FF.FFF</i> M • YYWWXX
							Optional Enhanced OTR Blank = Temp. range -10 to +70°C E = Temp. range -40 to +85°C	or
							Series Model	7XYWWXX
							Frequency Stability 45 = ± 50 ppm 44 = ± 25 ppm 20 = ± 20 ppm	FF.FFF M • PLE XXX
							Series Model	

#### Marking Legend:

PLE = Pletronics

*FF.FFF* M = Frequency in MHz

YYWW or YWW or YMD = Date of Manufacture (year and week, or year-month-day) All other marking is internal factory codes

Specifications such as frequency stability, supply voltage and operating temperature range, etc. are not identified from the marking. External packaging labels and packing list will correctly identify the ordered Pletronics part number.

Code	6		7		3		9		0	1	I		2			
Year	2006	j	2007	20	08	2	2009	2	010	20	11		2012			
Code		Α	В	0	;	D	Е		F	G	н		J	К	L	М
Month	ı J	AN	FEE	B MA	٨R	APF	R MAY	Y	JUN	JUL	AU	G	SEP	OCT	NOV	DEC
																· · · · · · · · · · · · · · · · · · ·
Code	1		2	3		4	5		6	7	8		9	Α	В	С
Day	1		2	3		4	5		6	7	8		9	10	11	12
Code	D		E	F	(	G	н		J	K	L		М	Ν	Р	R
Day	13		14	15	1	16	17	1	18	19	20		21	22	23	24
Code	Т		U	V	١	v	Х		Y	Ζ						
Day	25		26	27	2	28	29	3	30	31						

#### Codes for Date Code YMD



Feb 2008

### Electrical Specification for 1.80V ±10% over the specified temperature range

Item	Min	Max	Unit	Condition
Frequency Range	0.8	69.999	MHz	
Frequency Accuracy "45"	-50	+50	ppm	For all supply voltages, load changes, aging for 1
"44"	-25	+25		year, shock, vibration and temperatures
" <b>20</b> "	-20	+20		
Output Waveform		CMOS	-	
Output High Level	90	-	%	of V <sub>CC</sub> for I <sub>OH</sub> = +2 mA <35 MHz
	70	-		of V <sub>CC</sub> for I <sub>OH</sub> = +8 mA $\geq$ 35 MHz
Output Low Level	-	10	%	of $V_{\rm CC}$ for $I_{\rm OL}$ = -2 mA <35 MHz
	-	30		of $V_{CC}$ for $I_{OL}$ = -8 mA $\geq$ 35 MHz
Output Symmetry	45	55	%	at 50% point of $V^{}_{\rm cc}$ (See load circuit)
Jitter Output: 1 to 15MHz	-	6.0	pS RMS	10 Hz to 1 MHz from the output frequency
Output: 15 to 35MHz	-	5.0	pS RMS	
Output: 35 to 50MHz	-	4.0	pS RMS	
Output: 50 to 70MHz	-	3.0	pS RMS	
Output: 25 to 70MHz	-	0.7	pS RMS	12 KHz to 20 MHz from the output frequency
E/D Internal Pull-up	50	500	Kohm	to $V_{cc}$
V disable	-	30	%	of $V_{cc}$ applied to pin 1
V enable	70	-	%	
Output leakage V <sub>OUT</sub> = V <sub>CC</sub>	-10	+10	uA	Pin 1 low, device disabled
V <sub>OUT</sub> = 0V	-10	+10	uA	
Standby Current I <sub>cc</sub>	-	4	uA	<35 MHz
	-	100	uA	≥35 MHz
Enable time	-	250	nS	Time for output to reach a logic state
Disable time	-	250	nS	Time for output to reach a high Z state
Start up time	-	10	mS	Time for output to reach specified frequency
Operating Temperature	-10	+70	°C	Standard Temperature Range
Range	-40	+85	°C	Extended Temperature Range "E" Option
Storage Temperature Range	-55	+125	°C	




Feb 2008

Item	Тур	Max	Unit	Condition	
Output $T_{RISE}$ and $T_{FALL}$	2	5	nS	< 35 MHz	$C_{LOAD} = 15 \text{ pF}$
	1	3.5	nS	<u>&gt;</u> 35 MHz	20% to 80% of V <sub>cc</sub> See Load Circuit
	4	10	nS	< 35 MHz	$C_{LOAD} = 30 \text{ pF}$
	2	7	nS	<u>&gt;</u> 35 MHz	20% to 80% of V <sub>cc</sub> See Load Circuit
$V_{cc}$ Supply Current (I <sub>cc</sub> )	1	2	mA	< 8 MHz	C <sub>LOAD</sub> = 15 pF
	1.5	2.5	mA	$\geq$ 8 MHz and < 16 MHz	
	2	3	mA	<u>&gt;</u> 16 MHz and < 35 MHz	
	-	18	mA	<u>&gt;</u> 35 MHz	
	1.5	2.5	mA	< 8 MHz	C <sub>LOAD</sub> = 30 pF
	2	3	mA	<u>&gt;</u> 8 MHz and < 16 MHz	]
	3	4	mA	<u>&gt;</u> 16 MHz and < 35 MHz	]
	10	20	mA	<u>&gt;</u> 35 MHz	

### Electrical Specification for 1.80V ±10% over the specified temperature range


Specifications with Pad 1 E/D open circuit

#### Typical phase noise plot for 5 oscillators at different output frequencies.

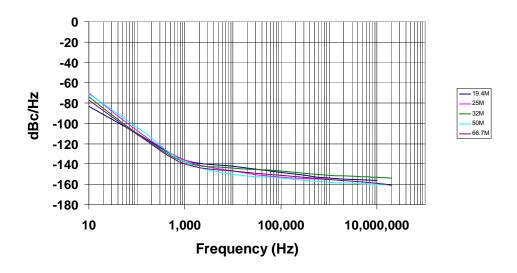



Feb 2008

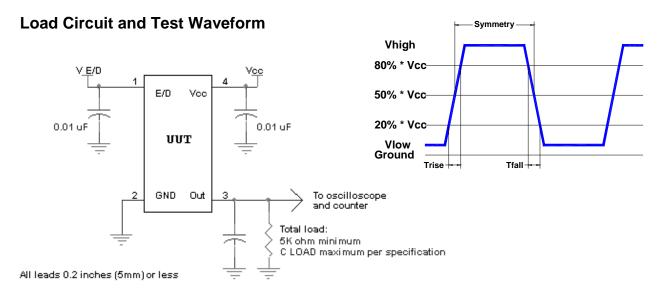

#### Reliability: Environmental Compliance


Parameter	Condition
Mechanical Shock	MIL-STD-883 Method 2002, Condition B
Vibration	MIL-STD-883 Method 2007, Condition A
Solderability	MIL-STD-883 Method 2003
Thermal Shock	MIL-STD-883 Method 1011, Condition A

### **ESD** Rating

Model	Minimum Voltage	Conditions		
Human Body Model	1500	MIL-STD-883 Method 3115		
Charged Device Model	1000	JESD 22-C101		

#### Package Labeling

Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Courier New Bar code is 39-Full ASCII




Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Arial

RoHS Compliant 2nd LvL Interconnect Category=e4 Max Safe Temp=260C for 10s 2X Max



Feb 2008

#### **Mechanical:**

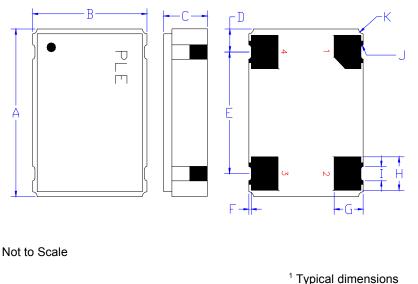

	Inches	mm
А	0.276 <u>+</u> 0.006	7.00 <u>+</u> 0.15
В	0.197 <u>+</u> 0.006	5.00 <u>+</u> 0.15
С	0.068 <u>+</u> 0.018	1.73 <u>+</u> 0.44
$D^1$	0.038	0.96
E <sup>1</sup>	0.200	5.08
F <sup>1</sup>	0.004	0.10
G1	0.050	1.27
H <sup>1</sup>	0.055	1.40
I <sup>1</sup>	0.024	0.60
$J^1$	0.004	0.10R
K <sup>1</sup>	0.008	0.020R

Contacts :

Gold 11.8 µinches 0.3 µm minimum over Nickel 50 to 350 µinches 1.27 to 8.89 µm

Pad	Function	Note
1	Output Enable/Disable	When this pin is not connected the oscillator shall operate. When this pin is logic low the output will be inhibited (high impedance state.) Recommend connecting this pin to $V_{cc}$ if the oscillator is to be always on.
2	Ground (GND)	
3	Output	
4	Supply Voltage (V <sub>cc</sub> )	Recommend connecting appropriate power supply bypass capacitors as close as possible.



### Layout and application information


For Optimum Jitter Performance, Pletronics recommends:

- a ground plane under the device
- no large transient signals (both current and voltage) should be routed under the device
- do not layout near a large magnetic field such as a high frequency switching power supply
- do not place near piezoelectric buzzers or mechanical fans.



Feb 2008

### Reflow Cycle (typical for lead free processing)

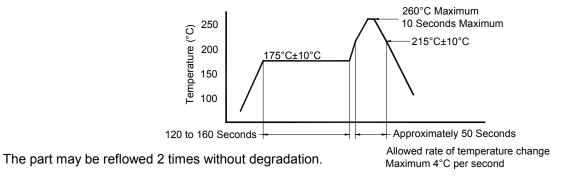


### Tape and Reel: available for quantities of 250 to 1000 per reel, cut tape for < 250

Not to scale

	Constant Dimensions Table 1											
Tape Size	D0	D1 Min	E1	P0	P2	S1 Min	T Max	T1 Max				
8mm		1.0			2.0							
12mm	1.5	1.5	1.75	4.0	<u>+</u> 0.05							
16mm	+0.1 -0.0	1.5	<u>+</u> 0.1	<u>+</u> 0.1	2.0	0.6	0.6	0.1				
24mm		1.5			<u>+</u> 0.1							

	Variable Dimensions Table 2										
Tape B1 E2 Min F P1 T2 W Ao, Bo   Size Max Max Ko							Ao, Bo & Ko				
16 mm	12.1	14.25	7.5 <u>+</u> 0.1	8.0 <u>+</u> 0.1	8.0	16.3	Note 1				

Note 1: Embossed cavity to conform to EIA-481-B

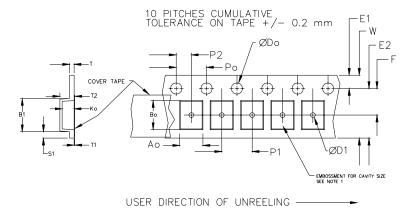

		REE	REEL DIMENSIONS							
А	inches	7.0	10.0	13.0						
	mm	177.8	254.0	330.2						
в	inches	2.50	4.00	3.75						
	mm	63.5	101.6	95.3	Tape Width					
С	mm	13	width							
D	mm	16.4 +2.0 -0.0	16.4 +2.0 -0.0	16.4 +2.0 -0.0	16.0					

Reel dimensions may vary from the above



Feb 2008

#### **IMPORTANT NOTICE**

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

#### **Contacting Pletronics Inc.**

Pletronics Inc. 19013 36<sup>th</sup> Ave. West Lynnwood, WA 98036-5761 USA Tel: 425-776-1880 Fax: 425-776-2760 E-mail: <u>ple-sales@pletronics.com</u> URL: www.pletronics.com

Copyright © 2006, 2007, Pletronics Inc.