FIXED VOLTAGE REGULATOR (POSITIVE)

3-TERMINAL 0.1A POSITIVE VOLTAGE REGULATORS


This series of fixed-voltage monolithic integrated-circuit voltage regulators is designed for a wide range of applications.

These applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation.

In addition, they can be used with power-pass elements to make high current voltage regulators.

Each of these regulators can deliver up to 100mA output current.

The internal limiting and thermal shutdown features of these regulators make them essentially immune to overload. When used as a replacement for a zener diode-resistor combination, an effective improvement in output impedance can be obtained together with lower-bias current.

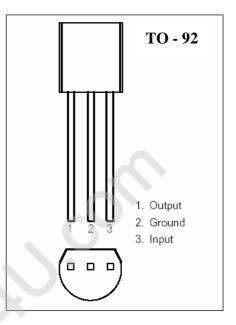

SO - 8

PIN CONNECTIONS

(Top View)

8 V_{IN}

7

6

5

GND

GND

NC

Vout

GND

GND

NC 4

1

2

3

FEATURES

- ◇ Output current Up to 100mA
- No External Components
- ♦ Internal Thermal Overload Protection
- ♦ Internal Short-Circuit Limiting
- Output Voltage of 5V, 6V, 8V, 9V, 10V, 12V, 15V, 18V and 24V

ABSOLUTE MAXIMUM RATINGS


Characteristic		Value	Unit
IL78L05 ~ IL78L10		30	6
IL78L12 ~ IL78L18	VI	35	v v
IL78L24		40	
erature	Topr	-40 ~ +150	0
	Tstg	-65 ~ +150	
nd time	Tsol	260/10sec	S
		NWN.D?	
	IL78L12 ~ IL78L18	IL78L12 ~ IL78L18 VI IL78L24 Topr Tstg	IL78L12 ~ IL78L18 VI 35 IL78L24 40 erature Topr -40 ~ +150 Tstg -65 ~ +150



78	Lxx	Min.	Max.	Unit
	IL78L05	7	20	
	IL78L06	8	20	
	IL78L08	10.5	23	
	IL78L09	11.5	24	
Input voltage, VI	IL78L10	12.5	25	V
	IL78L12	14.5	27	
	IL78L15	17.5	30	
	IL78L18	20.5	33	
	IL78L24	26.5	39	
Output current, Io	Output current, lo		100	mA
Operating virtual junction ter	nperature, Tj	-40	125	Ĵ

RECOMMENDED OPERATING CONDITIONS

TYPICAL APPLICATION

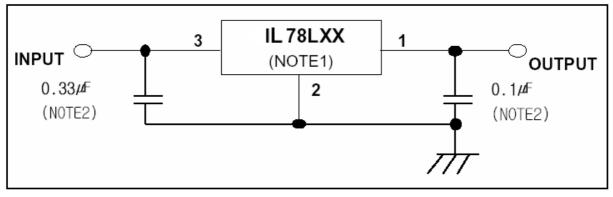

Notes

- 1. To specify an output voltage, substitute voltage for "XX"
- 2. Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.



IL78L05 ELECTRICAL CHARACTERISTICS

(At specified virtual junction temperature, VI=10V, Io=40mA (unless otherwise noted)

Characteistic	Symbol	Test cond	ition *	Min	Тур.	Max.	Unit
		25°C		4.8	5	5.2	
Output voltage **	Vout	$1_{mA} \le Io \le 40_{mA}$ $7V \le VI \le Vmax$	-40 ~ 125℃	4.75	5	5.25	V
		1mA≤lo≤ 70mA		4.75	5	5.25	
Line regulation	Reg line	7≤ VI≤ 20V	- 25 °C		32	150	
	Regime	8≤ VI≤ 20V	230		26	100	mV
Load regulation	Reg load	1 mA \leq lo \leq 100mA	- 25°C		15	60	- w
	neg load	1 mA \leq lo \leq 40mA	230		8	30	
Bias current	I _B		25 ℃		3.8	6	0
bias current			125℃			5.5	mA
Bias current change	∆l _B	9≤ VI≤ 20V	40 ~ 125℃			1.5	0
bias current change	⊐ı₿	1 mA \leq lo \leq 40mA	-40 ~ 123 0			0.1	mA
Output noise voltage	V _N	10 Hz $\leq f \leq 100$ kHz	25 ℃		42		μN
Ripple rejection	RR	8≤ VI≤ 20V f=120Hz	25°C	41	49		dB
Dropout voltage	V _D		25°C		1.7		V

Notes

*. Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible.

Thermal effects must be taken into account separately.

All characteristics are measured with a 0.33 μF capacitor across the input and a 0.1 μF capacitor across the output.



IL78L06 ELECTRICAL CHARACTERISTICS

Characteistic	Symbol	Test cond	ition *	Min	Тур.	Max.	Unit
			25 ℃	5.75	6	6.25	
Output voltage **	Vout	$1_{mA} \le Io \le 40_{mA}$ $8V \le VI \le 20V$	-40 ~ 125℃	5.7	6	6.3	V
		1mA≤lo≤ 70mA		5.7	6	6.3	
Line regulation	Reg line	8≤ VI≤ 20V	- 25°C		35	175	
	Regime	9≤ VI≤ 20V	230		29	125	mV
Load regulation	Reg load	1 mA \leq lo \leq 100mA	- 25°C		16	80	- W
Load regulation	Neg load	1 mA \leq lo \leq 40mA	230		9	40	
Bias current	I _B		25 ℃		3.9	6	٨
Dias current	'B		125℃			5.5	- mA
Bias current change	∆ا _B	9≤ VI≤ 20V	40 ~ 125℃			1.5	٨
bias current change	₩B	1 mA \leq lo \leq 40mA	-40 ~ 125 0			0.1	- mA
Output noise voltage	V _N	10 Hz $\leq f \leq 100$ kHz	25℃		46		μV
Ripple rejection	RR	9≤ VI≤ 19V f=120Hz	25°C	40	48		dB
Dropout voltage	V _D		25 ℃		1.7		V

(At specified virtual junction temperature, VI=12V, Io=40mA (unless otherwise noted)

Notes

*. Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible.

Thermal effects must be taken into account separately.

All characteristics are measured with a $0.33 \mu F$ capacitor across the input and a $0.1 \mu F$ capacitor across the output.



IL78L08 ELECTRICAL CHARACTERISTICS

(At specified virtual junction temperature, VI=14V, Io=40mA (unless otherwise noted)

Characteistic	Symbol	Test cond	ition *	Min	Тур.	Max.	Unit
			25℃	7.7	8	8.3	
Output voltage **	Vout	$1 \text{mA} \le \text{Io} \le 40 \text{mA}$ $10.5 \text{V} \le \text{VI} \le 23 \text{V}$	-40 ~ 125℃	7.6	8	8.4	V
		1mA≤lo≤ 70mA		7.6	8	8.4	
	Poglipo	10.5≤ VI≤ 23V	25 %		42	175	
Line regulation F	Reg line	11≤ VI≤ 23V	- 25℃		36	125	mV
	Reg load	1 mA \leq lo \leq 100mA	25℃ -		18	80	- mV
Load regulation	Regildau	1 mA \leq lo \leq 40mA	23 C		10	40	
Bias current	I _B		25℃		4	6	
Bias current			125 °C			5.5	mA
Bias current change	∆l _B	11≤ VI≤ 23V	-40 ~ 125℃			1.5	
bias current change	ΔIB	1 mA \leq lo \leq 40mA	40 ~ 125 0			0.1	- mA
Output noise voltage	V _N	$10H_z \le f \le 100kH_z$	25°C		54		μŅ
Ripple rejection	RR	$13 \le VI \le 23V$ f=120Hz	25°C	37	46		dB
Dropout voltage	V _D		25 ℃		1.7		V

Notes

*. Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible.

Thermal effects must be taken into account separately.

All characteristics are measured with a 0.33μ F capacitor across the input and a 0.1μ F capacitor across the output.



IL78L09 ELECTRICAL CHARACTERISTICS

(At specified virtual junction temperature, VI=14V, Io=40mA (unless otherwise noted)

Characteistic	Symbol	Test cond	ition *	Min	Тур.	Max.	Unit
			25℃	806	9	9.4	
Output voltage **	Vout	$1 \text{mA} \le \text{Io} \le 40 \text{mA}$ $12 \text{V} \le \text{VI} \le 24 \text{V}$	-40 ~ 125℃	8.55	9	9.45	V
		1mA≤lo≤ 70mA		8.55	9	9.45	
	Degline	12≤ VI≤ 24V	25 %		45	175	
Line regulation Reg	Reg line	13≤ VI≤ 24V	- 25℃		40	125	mV
	Reg load	1 mA \leq lo \leq 100mA	- 25℃ -		19	90	- wV
Load regulation	Regildau	$1_{\text{mA}} \le Io \le 40_{\text{mA}}$	- 25 C		11	40	
Bias current	I _B		25℃		4.1	6	
bias current			125℃			5.5	mA
Bias current change	∆l _B	13≤ VI≤ 24V	40 ~ 125℃			1.5	
bias current change	₩	1 mA \leq lo \leq 40mA	40 ~ 125 0			0.1	mA
Output noise voltage	V _N	10 Hz $\leq f \leq 100$ kHz	25 ℃		58		μV
Ripple rejection	RR	13≤ VI≤ 23V f=120Hz	25°C	38	45		dB
Dropout voltage	V _D		25°C		1.7		V

Notes

*. Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible.

Thermal effects must be taken into account separately.

All characteristics are measured with a 0.33μ F capacitor across the input and a 0.1μ F capacitor across the output.



IL78L10 ELECTRICAL CHARACTERISTICS

(At specified virtual junction temperature, VI=16V, Io=40mA (unless otherwise noted)

Characteistic	Symbol	Test cond	ition *	Min	Тур.	Max.	Unit	
			25 ℃	9.6	10	10.4		
Output voltage **	Vout	$1_{mA} \le Io \le 40_{mA}$ $13V \le VI \le 25V$	-40 ~ 125℃	9.5	10	10.5	V	
		1mA≤lo≤ 70mA		9.5	10	10.5		
	Reg line	13≤ VI≤ 25V	- 25°C		51	175	V	
Line regulation Re	Regime	14≤ VI≤ 25V	23 C		42	125	mV	
	Reg load	1 mA \leq lo \leq 100mA	25℃		20	90	- mV	
Load regulation	iteg load	1 mA \leq lo \leq 40mA	230		11	40		
Bias current	I _B		25 ℃		4.2	6	٨	
Dias current	'Β		125℃			5.5	mA	
Bias current change	∆l _B	14≤ VI≤ 25V	40 ~ 125℃			1.5	٨	
Dias current change	⊡IB	1 mA \leq lo \leq 40mA	-40 ~ 125 0			0.1	mA	
Output noise voltage	V _N	10 Hz $\leq f \leq 100$ kHz	25 ℃		62		μŅ	
Ripple rejection	RR	15≤ VI≤ 25V f=120Hz	25℃	37	44		dB	
Dropout voltage	V _D		25℃		1.7		V	

Notes

*. Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible.

Thermal effects must be taken into account separately.

All characteristics are measured with a 0.33μ F capacitor across the input and a 0.1μ F capacitor across the output.



IL78L12 ELECTRICAL CHARACTERISTICS

(At specified virtual junction temperature, VI=17V, Io=40mA (unless otherwise noted)

Characteistic	Symbol	Test cond	ition *	Min	Тур.	Max.	Unit
			25 ℃	11.5	12	12.5	
Output voltage **	Vout	$1_{mA} \le lo \le 40_{mA}$ $14V \le VI \le 27V$	-40 ~ 125℃	11.4	12	12.6	V
		1mA≤lo≤ 70mA		11.4	12	12.6	
Line regulation	Reg line	14.5≤ VI≤ 27V	- 25℃		55	250	
	Regime	16≤ VI≤ 27V	23 C		49	200	mV
	Reg load	1 mA \leq lo \leq 100mA	25℃		22	100	- mV
Load regulation	Rey Idau	$1_{\text{mA}} \le lo \le 40_{\text{mA}}$	25 C		13	50	
Bias current	I _B		25 ℃		4.3	6.5	
Bias current			125°C			6	mA
Bias current change	<u>^ </u>	16≤ VI≤ 27V	40 ~ 125℃			1.5	
Dias current change	∆I _B	$1_{\text{mA}} \le lo \le 40_{\text{mA}}$	-40~1250			0.1	mA
Output noise voltage	V _N	$10H_z \le f \le 100kH_z$	25℃		70		μV
Ripple rejection	RR	$15 \le VI \le 25V$ f=120Hz	25℃	37	42		dB
Dropout voltage	V _D		25°C		1.7		V

Notes

*. Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible.

Thermal effects must be taken into account separately.

All characteristics are measured with a 0.33μ F capacitor across the input and a 0.1μ F capacitor across the output.



IL78L15 ELECTRICAL CHARACTERISTICS

(At specified virtual junction temperature, VI=19V, Io=40mA (unless otherwise noted)

Characteistic	Symbol	Test cond	ition *	Min	Тур.	Max.	Unit	
			25 ℃	14.4	15	15.6		
Output voltage **	Vout	$1_{mA} \le Io \le 40_{mA}$ $17.5V \le VI \le 30V$	-40 ~ 125℃	14.25	15	15.75	V	
		1mA≤lo≤ 70mA		14.25	15	15.75		
Line regulation	Reg line	17.5≤ VI≤ 30V	25°0		65	300		
	Regime	19≤ VI≤ 30V	25°C ≤ VI≤ 30V		58	250	mV	
Load regulation	Reg load	1 mA \le lo \le 100mA	25℃ -		25	150	- W	
Load regulation	neg load	1 mA \leq lo \leq 40mA	23.6		15	75		
Bias current			25℃		4.2	6.5		
bias current	Ι _Β		125℃			6	mA	
Bias current change	∆l _B	19≤ VI≤ 30V	-40 ~ 125℃			1.5	٨	
bias current change		1 mA \leq lo \leq 40mA	-40 ~ 125 0			0.1	mA	
Output noise voltage	V _N	$10H_z \le f \le 100$ kHz	25 ℃		82		μV	
Ripple rejection	RR	18.5≤ VI≤ 28.5V f=120Hz	25°C	37	44		dB	
Dropout voltage	V _D		25℃		1.7		V	

Notes

*. Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible.

Thermal effects must be taken into account separately.

All characteristics are measured with a 0.33μ F capacitor across the input and a 0.1μ F capacitor across the output.



IL78L18 ELECTRICAL CHARACTERISTICS

(At specified virtual junction temperature, VI=23V, Io=40mA (unless otherwise noted)

Characteistic	Symbol	Test cond	ition *	Min	Тур.	Max.	Unit	
			25℃	17.3	18	18.7		
Output voltage **	Vout	$1_{\text{mA}} \le I_0 \le 40_{\text{mA}}$ $20.5V \le VI \le 33V$	-40 ~ 125℃	17.1	18	18.9	V	
		1mA≤lo≤ 70mA		17.1	18	18.9		
Line regulation	Reg line	20.5≤ VI≤ 33V	25 ℃		70	360		
	Regime	22≤ VI≤ 33V	- 250		64	300	mV	
Load regulation	Reg load	1 mA \le lo \le 100mA	25℃		27	180	- w	
Load regulation	rteg load	1 mA \leq lo \leq 40mA	230		19	90		
Bias current	I _B		25℃		4.7	6.5	0	
	чВ		125℃			6	mA	
Bias current change	∆l _B	22≤ VI≤ 33V	-40 ~ 125℃			1.5	0	
Dias current change	⊐ı₿	1 mA \leq lo \leq 40mA	-40 ~ 123 0			0.1	mA	
Output noise voltage	V _N	$10 \text{Hz} \le f \le 100 \text{kHz}$	25 ℃		82		μV	
Ripple rejection	RR	21.5≤ VI≤ 31.5V f=120Hz	25℃	32	36		dB	
Dropout voltage	V _D		25°C		1.7		V	

Notes

*. Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible.

Thermal effects must be taken into account separately.

All characteristics are measured with a 0.33μ F capacitor across the input and a 0.1μ F capacitor across the output.



IL78L24 ELECTRICAL CHARACTERISTICS

(At specified virtual junction temperature, VI=26V, Io=40mA (unless otherwise noted)

Characteistic	Symbol	Test cond	ition *	Min	Тур.	Max.	Unit
			25℃	23	24	25	
Output voltage **	Vout	$1_{mA} \le Io \le 40_{mA}$ $26.5V \le VI \le 39V$	-40 ~ 125℃	22.8	24	25.2	V
		1mA≤lo≤ 70mA		22.8	24	25.2	
	Reg line	26.5≤ VI≤ 39V	35 %		95	480	V
Line regulation Re	Regime	25 °C 29≤ VI≤ 39V			78	400	mV
	Reg load	1 mA \le lo \le 100mA	25°C		41	240	mV
Load regulation	iteg load	1 mA \leq lo \leq 40mA	230		28	120	
Bias current			25℃		4.8	6.5	٨
Dias current	I _B		125℃			6	mA
Bias current change	∆l _B	28≤ VI≤ 39V	-40 ~ 125℃			1.5	٨
Dias current change	⊡IB	1 mA \leq lo \leq 40mA	-40 ~ 123 0			0.1	mA
Output noise voltage	V _N	$10H_z \le f \le 100$ kHz	25 ℃		82		μŅ
Ripple rejection	RR	27.5≤ VI≤ 37.5V f=120Hz	25°C	30	33		dB
Dropout voltage	V _D		25℃		1.7		V

Notes

*. Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible.


Thermal effects must be taken into account separately.

All characteristics are measured with a 0.33μ F capacitor across the input and a 0.1μ F capacitor across the output.



PACKAGE OUTLINE

[TO-92]

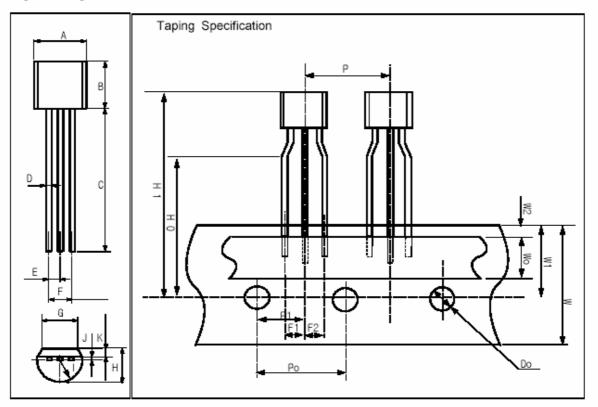

	Package Dime	nsion(unit:mm)			Taping Dimen	sion(unit:mm)	
Symbol	Min	Тур	Max	Symbol	Min	Тур	Max
А	4.43	4.58	4.83	Р	12.2	12.7	13.2
В	4.38	4.58	4.78	PO	12.5	12.7	12.9
с	14.07	14.47	14.87	P1	5.85	6.35	6.85
D	0.36	0.46	0.56	F1,F2	2.4	2.5	2.9
E	1.07	1.27	1.47	w	17.5	18.0	19.0
F	2.34	2.54	2.74	wo	5.5	6.0	6.5
G	3.40	3.60	3.80	W1	8.5	9.0	9.5
н	-	-	3.86	W2	-	-	1.0
I	-	[R2.29]	-	но	15.5	16.0	16.5
J	0.33	0.38	0.39	H1	-	-	27.0
к	0.92	1.02	1.12	DO	3.8	4.0	4.2



Mechanical Dimensions (Continued)

Package

