

Technical Data Sheet

3ϕ Piranha

33-01-C34-YYSC-A5T1U1CH-AM



Feature

- Lead-Free
- · RoHS compliant.
- · Low profile.
- · Uniform color
- · High flux output
- Colorless clear resin.
- 7150 to 14250 mlm at 70mA.
- Qualification according to AEC-Q101.
- Packaged in tubes for use with automatic insertion equipment.

Applications

- Automotive exterior lighting: Turn light, tail light, rear-view mirror light, side light, license light switch, 3rd braking light...etc.
- Substitution of traditional light.
- Electronic Signs and Signals.
- · General applications.

Device Selection Guide

Chip	Emitted Color	Resin Color	
Material	Emitted Color		
AlGaInP	Yellow	Water Clear	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 1 of 12



Technical Data Sheet

3ϕ Piranha

33-01-C34-YYSC-A5T1U1CH-AM

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	70	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	120	mA
Power Dissipation	Pd	220	mW
Junction Temperature	$T_{\rm j}$	115	$^{\circ}\!\mathbb{C}$
Operating Temperature	T_{opr}	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Thermal Resistance	Rth _{J-A}	140	K/W
ESD	ESD _{HBM}	2000	V
(Classification acc. AEC Q101)	ESD _{MM}	200	V
Soldering Temperature	$T_{\rm sol}$	Wave Soldering : 260 °C for 5 sec. Hand Soldering : 300 °C for 3 sec.	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 2 of 12



Technical Data Sheet

3ϕ Piranha

33-01-C34-YYSC-A5T1U1CH-AM

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Total Flux	$\Phi_{ m V}$	7150		14250	mlm	I _F =70mA
Viewing Angle	$2\theta_{1/2}$		105		deg	I _F =70mA
Peak Wavelength	λ_{p}		592		nm	I _F =70mA
Dominant Wavelength	λ_{d}	590		598	nm	I _F =70mA
Spectrum Radiation Bandwidth	Δλ		15		nm	I _F =70mA
Forward Voltage	V_{F}	1.9		2.9	V	I _F =70mA
Reverse Current	I_R			10	μΑ	$V_R = 10V$

Note:

1. Tolerance of Total Flux: ±10%

2. Tolerance of Dominant Wavelength: ±1nm

3. Tolerance of Forward Voltage: ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 3 of 12



Technical Data Sheet

3ϕ Piranha

33-01-C34-YYSC-A5T1U1CH-AM

Bin Range of Total Flux

Bin Code	Min.	Max.	Unit	Condition
T1	7150	9000		
T2	9000	11250	mlm	$I_F = 70 \text{mA}$
U1	11250	14250		

Note:

Tolerance of Total Flux: ±10%

Bin Range of Dominant Wavelength

Bin Code	Min.	Max.	Unit	Condition
4	590	592		I _F =70mA
5	592	594	nm	
6	594	596		
7	596	598		

Note:

Tolerance of Dominant Wavelength: ±1nm

Bin Range of Forward Voltage

Bin Code	Min.	Max.	Unit	Condition
2	1.9	2.1		
3	2.1	2.3		
4	2.3	2.5	V	$I_F = 70 \text{mA}$
5	2.5	2.7		
6	2.7	2.9		

Note:

Tolerance of Forward Voltage: ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 4 of 12




Technical Data Sheet

3ϕ Piranha

33-01-C34-YYSC-A5T1U1CH-AM


Typical Electro-Optical Characteristics Curves

Typical Curve of Spectral Distribution

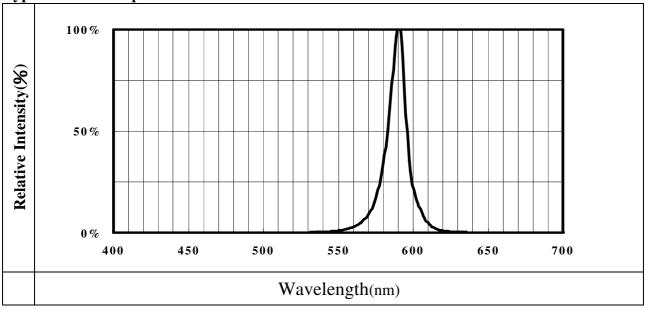

Note: $V(\lambda)$ =Standard eye response curve; I_F =20mA

Diagram Characteristics of Radiation

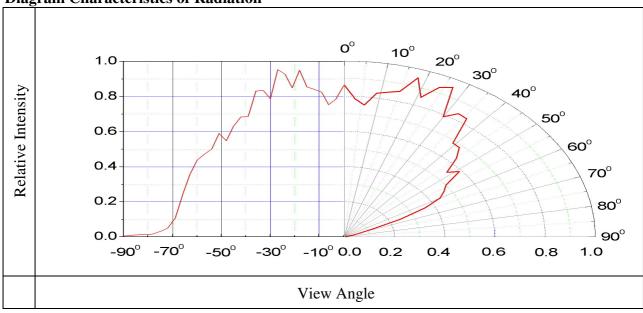


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 5 of 12




Technical Data Sheet

3ϕ Piranha

33-01-C34-YYSC-A5T1U1CH-AM

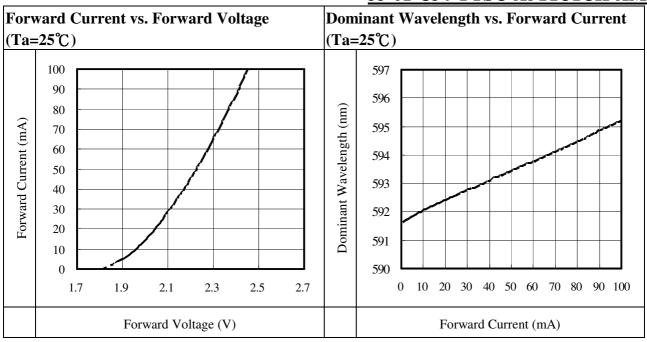

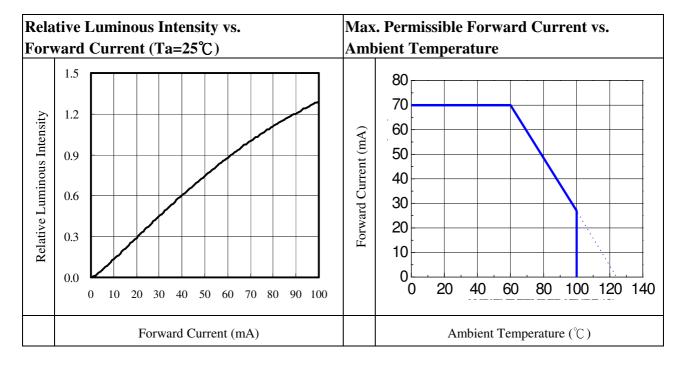

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 6 of 12




Technical Data Sheet

3ϕ Piranha

33-01-C34-YYSC-A5T1U1CH-AM

Package Dimension

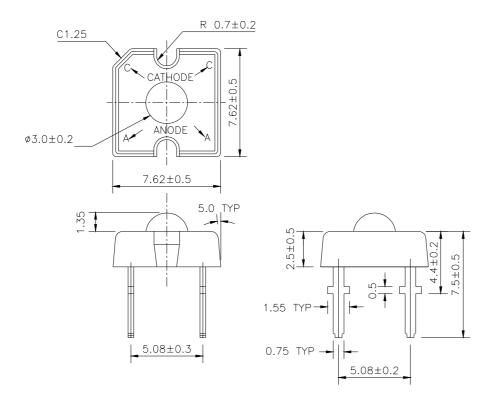

Note: Tolerances unless mentioned ± 0.25 mm. Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 7 of 12





Technical Data Sheet

3ϕ Piranha


33-01-C34-YYSC-A5T1U1CH-AM

Moisture Resistant Packing Materials Tube





Note: Tolerances unless mentioned ±2.0mm. Unit = mm



Tube Label Explanation


• PART NO: Product Number

• QTY: Packing Quantity

· LOT No: Lot Number

CAT: Rank of (VF)(Note*)(ΦV)
 Note: λ_d/CIE/Color temperature

Standard Box





Tube Label Explanation

• CPN: Customer's Product Number

• P/N: Product Number

• QTY: Packing Quantity

• CAT: Rank of (Note*)

Note: λ_d /CIE/Color temperature

• Luminous Flux(Intensity)

• HUE/REF: Reference

• LOT No: Lot Number

Note: Tolerances unless mentioned ± 3.0 mm. Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 8 of 12



Technical Data Sheet

3ϕ Piranha

33-01-C34-YYSC-A5T1U1CH-AM

Packing Quantity

Packing material	Length × Width × height (mm)	Tube Quantity (Pcs)	LED Quantity (Pcs)
Tube	485 x 9.5 x12	1	60
Standard box	510 x 100 x 45	30	1800
Large box	510 x 150 x 90	105	6300

Note:

- 1. Normal packing specification is use standard box, unless already defined initially.
- 2. Vacuum packing with anti-static bag after packing in standard box.
- 3. Specifications are subject to change without prior notice.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 9 of 12



Technical Data Sheet

3ϕ Piranha

33-01-C34-YYSC-A5T1U1CH-AM

Notes

1. Lead Forming

- During lead formation, the leads should be bent at a point at least 3mm from the base of the epoxy bulb.
- Lead forming should be done before soldering.
- Avoid stressing the LED package during leads forming. The stress to the base may damage the LED's characteristics or it may break the LEDs.
- Cut the LED leadframes at room temperature. Cutting the leadframes at high temperatures may cause failure of the LEDs.
- When mounting the LEDs onto a PCB, the PCB holes must be aligned exactly with the lead position of the LED. If the LEDs are mounted with stress at the leads, it causes deterioration of the epoxy resin and this will degrade the LEDs.

2. Storage

- The LEDs should be stored at 30°C or less and 70%RH or less after being shipped from Everlight and the storage life limits are 3 months. If the LEDs are stored for 3 months or more, they can be stored for a year in a sealed container with a nitrogen atmosphere and moisture absorbent material.
- Please avoid rapid transitions in ambient temperature, especially, in high humidity environments where condensation can occur.

3. Soldering

- Careful attention should be paid during soldering. Solder the LED no lower than 1.6mm from the base of stopper is recommended.
- Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

■ Recommended soldering conditions:

Hand Soldering		DIP Soldering		
Temp. at tip of iron	300°C Max. (30W Max.)	Preheat temp.	100°C Max. (60 sec Max.)	
Soldering time	3 sec Max.	Bath temp.	260 Max.	
Distance	No lower than 1.6mm from	Bath time.	5 sec Max.	
	the base of stopper			
		Distance	No lower than 1.6mm from	
			the base of stopper	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 10 of 12



Technical Data Sheet

3ϕ Piranha

33-01-C34-YYSC-A5T1U1CH-AM

- Dip and hand soldering should not be done more than one time.
- After soldering the LEDs, the epoxy bulb should be protected from mechanical shock or vibration until the LEDs return to room temperature.
- A rapid-rate process is not recommended for cooling the LEDs down from the peak temperature.
- Although the recommended soldering conditions are specified in the above table, dip or handsoldering at the lowest possible temperature is desirable for the LEDs.
- Wave soldering parameter must be set and maintain according to recommended temperature and dwell time in the solder wave.

4. Cleaning

- When necessary, cleaning should occur only with isopropyl alcohol at room temperature for a duration of no more than one minute. Dry at room temperature before use.
- Do not clean the LEDs by the ultrasonic. When it is absolutely necessary, the influence of ultrasonic cleaning on the LEDs depends on factors such as ultrasonic power and the assembled condition. Ultrasonic cleaning shall be pre-qualified to ensure this will not cause damage to the LED

5. Heat Management

- Heat management of LEDs must be taken into consideration during the design stage of LED application. The current should be de-rated appropriately by referring to the de-rating curve found in each product specification.
- The temperature surrounding the LED in the application should be controlled. Please refer to the data sheet de-rating curve.

6. ESD (Electrostatic Discharge)

- Electrostatic discharge (ESD) or surge current (EOS) can damage LEDs.
- An ESD wrist strap, ESD shoe strap or antistatic gloves must be worn whenever handling LEDs.
- All devices, equipment and machinery must be properly grounded.
- Use ion blower to neutralize the static charge which might have built up on surface of the LEDs plastic lens as a result of friction between LEDs during storage and handing.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 11 of 12



Technical Data Sheet

3ϕ Piranha

33-01-C34-YYSC-A5T1U1CH-AM

7. Other

- Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1.0 Page: 12 of 12