

Commercial CCR-39 Multi-Throw DC-18GHz Latching

The CCR-39 Switch is a broadband, multi-throw, electromechanical coaxial switch designed to switch a microwave signal from a common input to any of 3, 4, 5, or 6 outputs. The characteristic impedance is 50 Ohms. The switches are small using the popular connector spacing on a 1.062" dia. circle. Each position has an individual actuator mechanism allowing random position selection. This also minimizes switching time.

Specifications

RF Contacts: Break before make

Actuator Voltage (VDC) 20

Voltage (VDC) 20°C 12 15 28 255 205 Latching Current (mA) 90 Positions Reset Current (mA) 3 765 615 270 4 1020 820 360 5 1275 1025 450 6 1230 540 1530

Switching Time: 20 msec max

Connectors: SMA (f)

Weight: 6 oz. max

Temperature Range: -40°C to +65°C (Operating)

The CCR-39 comes with a latching actuator. The latching switch remains in the last position selected when the switch is de-energized. STD dual command requires a reset pulse before a new selected position. A separate reset circuit allows all positions to be set to an open position. User must provide both reset (clear) and set (select new position) commands.

Shock: MIL-STD-202 Method 213, Condition D (500G

Non Operating)

Vibration: MIL-STD-202 Method 214, Condition D (10G

RMS Non Operating)


Humidity: Moisture Seal Available

MTBF: 6.5 Million Hours (MIL-HDBK-217F Fixed, 25°

Typical Performance

C, <1 Cycle per hour)

RF Power Handling

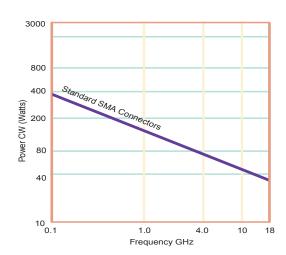


 Specifications
 DC-6 GHz
 6-12 GHz
 12-18 GHz

 VSWR (max)
 1.25:1
 1.40:1
 1.50:1

 Insertion Loss (min)
 0.20 dB
 0.40 dB
 0.50 dB

 Isolation (max)
 70.0 dB
 60.0 dB
 60.0 dB

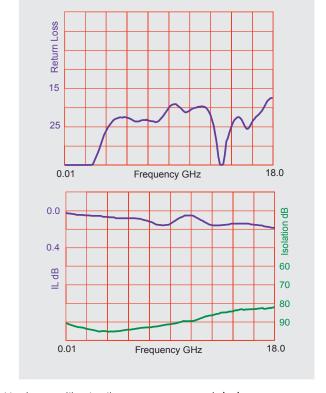






Specifications subject to change without notice.


www.teledynecoax.com email: coax@teledyne.com


Commercial **CCR-39** Multi-Throw DC-18GHz Latching

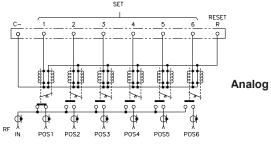

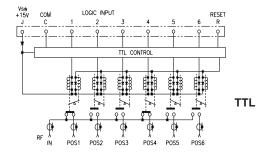


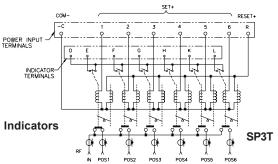








SP5T







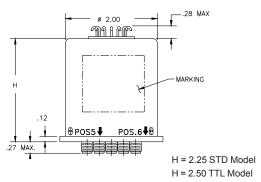

Part Numbering System for CCR-39 (Latching) CCR-39 S 6 5 O - T **Options** Connectors **Actuator Type** Actuator Voltage Number of Switch Positions

Connector S: SMA Female

Actuator Voltage

Series

6: 28Vdc Latching

7: 15Vdc Latching

8: 12Vdc Latching

For other options contact Factory

Number of **Positions**

3: SP3T

4: SP4T

5: SP5T 6: SP6T

Actuator Type

O: No Indicator Contacts

C: Indicator Contacts

D: Self Cutoff Only

E: Indicators and Self Cutoff

T: TTL Drivers with Diodes

R: Positive + Common

TD: TTL Driver with Decoder



Specifications subject to change without notice.

www.teledynecoax.com email: coax@teledyne.com