

unit : mm


#### Features

- Ultra high speed switching application
- Low forward voltage :  $V_F=0.9V(Typ.)$
- Fast reverse recovery time :  $t_{rr}=1.6$  ns(Typ.)
- Small total capacitance :  $C_T=2.2 \text{ pF}(Typ.)$

### **Ordering Information**

Type No.	Marking	Package Code	
ND181	J	SOD-923	

#### **Outline Dimensions**

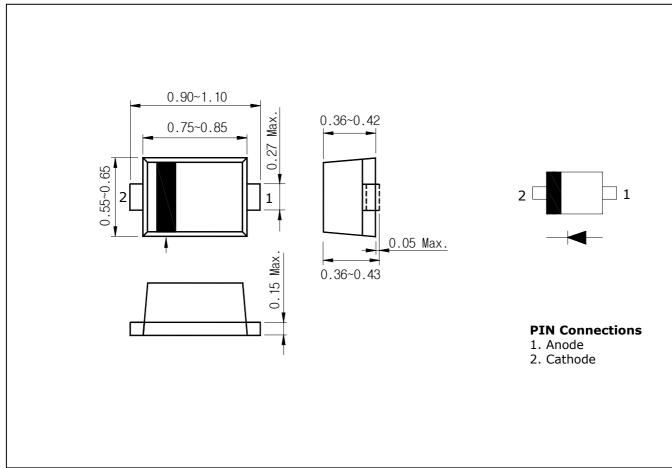

# **ND181**

**Ta=25°**C


### Absolute maximum ratings

Characteristic	Symbol	Rating	Unit
Peak reverse voltage	V <sub>RM</sub>	85	V
Reverse voltage	V <sub>R</sub>	80	V
Peak forward current	I <sub>FM</sub>	300	mA
Average forward current	Io	100	mA
Peak forward surge current(10ms)	I <sub>FSM</sub>	2	А
Power dissipation	P <sub>D</sub>	100	mW
Junction temperature	Tj	150	°C
Storage temperature range	T <sub>stg</sub>	-55 ~ 150	°C

### **Electrical Characteristics**

Electrical Characteristics				Ta=25°0		
Characteristic	Symbol	Test Condition	Min.	Тур.	Max.	Unit
Forward voltage	V <sub>F(1)</sub>	$I_F = 1 \text{ MA}$	-	0.6	-	
	V <sub>F(2)</sub>	$I_F = 10 \text{ MA}$	-	0.7	-	V
	V <sub>F(3)</sub>	$I_F = 100 \text{ mA}$	-	0.9	1.2	
Reverse current	I <sub>R</sub>	V <sub>R</sub> =80V	-	-	0.5	μA
Total capacitance	CT	$V_R=0$ , f=1 MHz	-	2.2	4.0	pF
Reverse recovery time	t <sub>rr</sub>	$I_F=10 \text{ mA}$ (Fig. 5)	-	1.6	4.0	ns

#### **\*** Recommend PCB solder land (Unit : mm)



## ND181

### **Electrical Characteristic Curves**

Fig. 5 Reverse recovery time(trr) test circuit


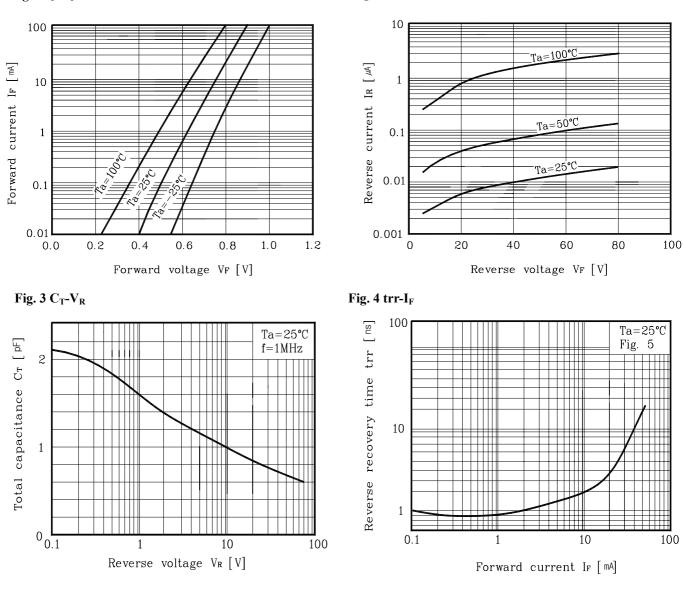


Fig. 1 I<sub>F</sub>-V<sub>F</sub>

Fig. 2 I<sub>R</sub>-V<sub>R</sub>

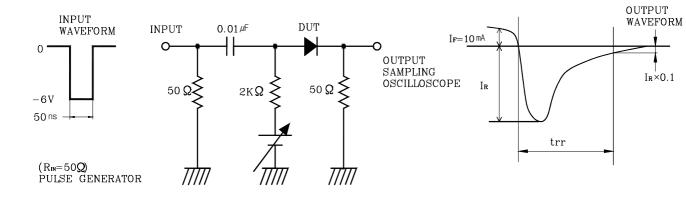

## **ND181**

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.