



Environmental and vibration specs.


0664D SERIES


The 664D filter is a 3 phase (Delta) filter.
This series is designed to be used with military systems which are required to meet the conducted emission levels of MIL-STD-461, CE03.
Minor modifications can be done to adjust the

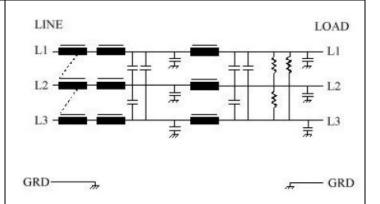

Operating Voltage = 250/480 V ac
Operating Current Max= 7 & 1 0 amps
Operating Frequency = 50 - 400Hz
Operating Temperature= -20 to +50oC
Diel Withstand (L to Case)= 1 500V ~for 1 Min.
Diel Withstand (L to L)= 1 500V dc for 1 Min.
Leakage current @ 250V ~60Hz=
1.0 mA at 250V ac, 400Hz
Max Residual Voltage after 5 secs = 34 V olts
Max

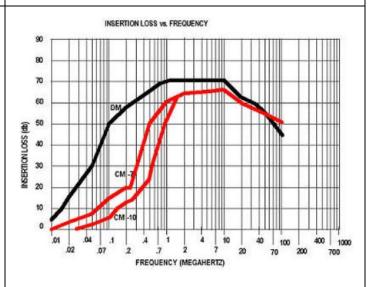

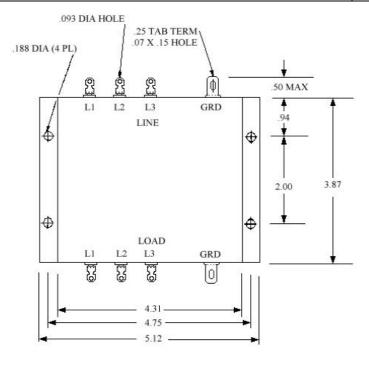

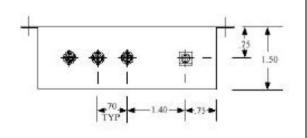

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115 email: info@jmkfilters.com

EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884