

KR Electronics 2612 Bandpass Filter

General Description


KR 2612 is a 39 KHz Bandpass Filter. Other center frequencies and bandwidths are available. Please consult the factory.

Features


- 6 Pole Response
- 2K Ω Source and Load

Typical Performance

Passband Amplitude
(1 dB/div)

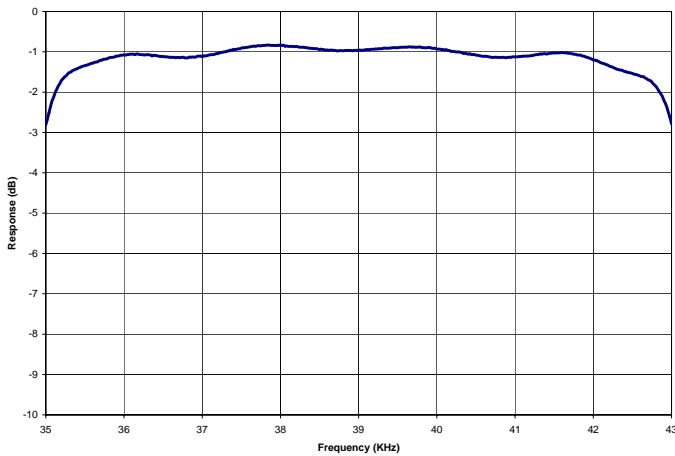

Overall Response
(10 dB/div)

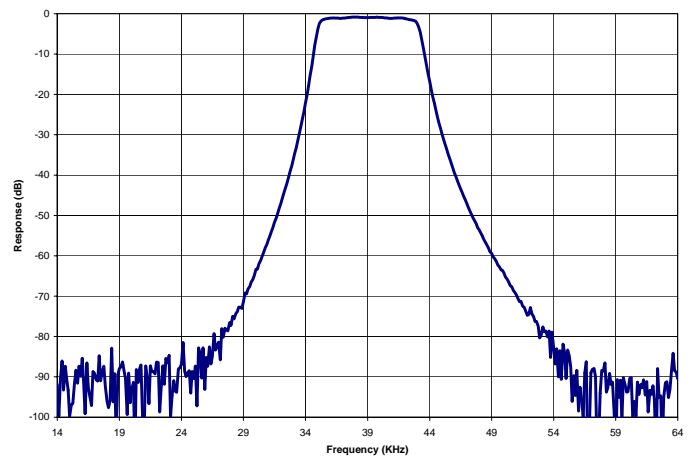

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2612 Bandpass Filter

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	39 KHz
Insertion Loss	< 2.5 dB (1 dB typical)
3 dB Bandwidth	8 KHz Minimum
Source & Load	2 K Ω

Physical Dimensions

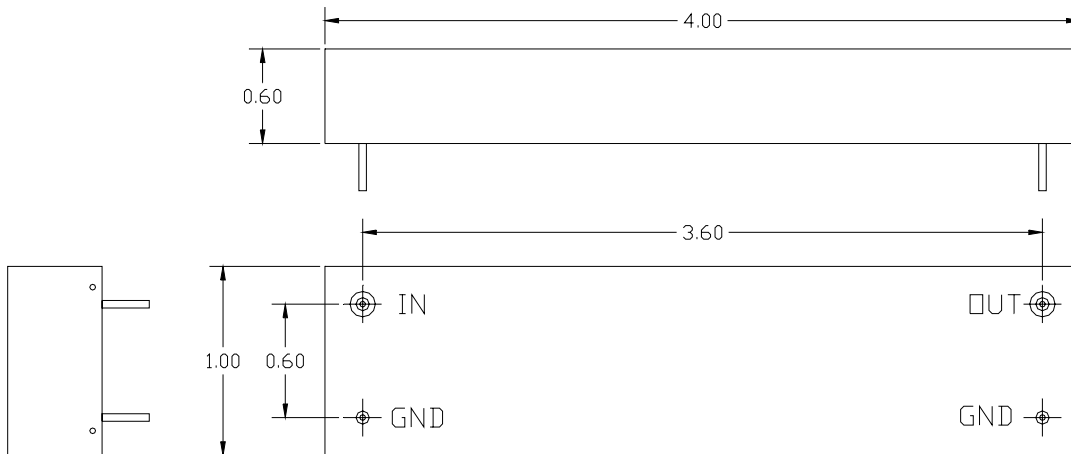

Dimensions shown in inches
Metal Case
Terminals 0.040" Diameter
Ground Terminals Connected to Case