

Schottky-Barrier Diode


■ Features

- Low VF
- Center tap connection


■ Applications

- High frequency operation
- DC-DC converters
- AC adapter

■ Outline drawings, mm

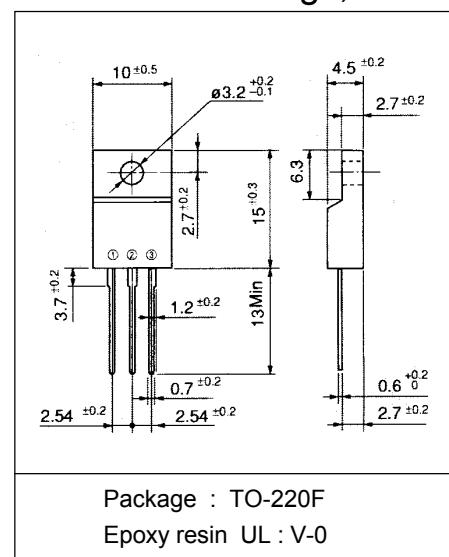

■ Connection diagram

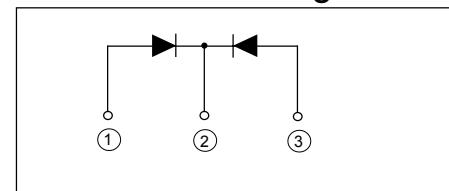

■ Maximum ratings and characteristics

● Maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak surge reverse voltage	V_{RSM}	$t_w=500\text{ns}$, duty=1/40	40	V
Repetitive peak reverse voltage	V_{RRM}		40	V
Isolating voltage	V_{iso}	Terminals-to-Case, AC.1min.	1500	V
Average output current	I_o	Square wave, duty=1/2 $T_c=92^\circ\text{C}$	15 *	A
Non-repetitive surge current	I_{FSM}	Sine wave 10ms	120	A
Operating junction temperature	T_j		+150	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to +150	$^\circ\text{C}$

* Out put current of center tap full wave connection

● Electrical characteristics (at $T_a=25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage **	V_F	$I_F=7\text{A}$	0.55	V
Reverse current **	I_R	$V_R=V_{RRM}$	3.0	mA
Thermal resistance	$R_{th(j-c)}$	Junction to case	3.5	$^\circ\text{C/W}$

**Rating per element

● Mechanical characteristics

Mounting torque	Recommended torque	0.3 to 0.5	N·m
Approximate mass		2	g

■ Characteristics

