


Highpass Filter

KR Model
2290-68


Passband Amplitude & Group Delay

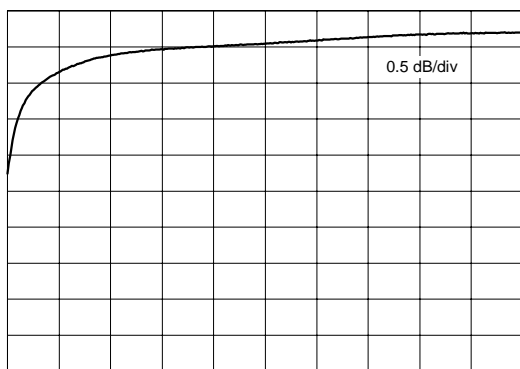

68 MHz

125 MHz

Overall Amplitude

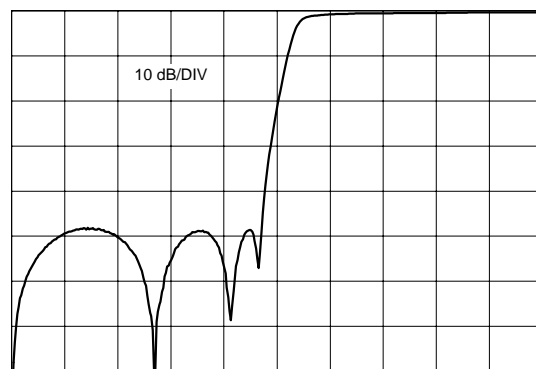


100 KHz

125 MHz

Specifications

KR Part Number	2290-68
Filter Type	Highpass
Insertion Loss	< 1 dB
End of Stopband >45 dB	58.87 MHz
Start of Passband < 4 dB	68 MHz
Source and Load Impedance	50 Ω

Outline Drawing

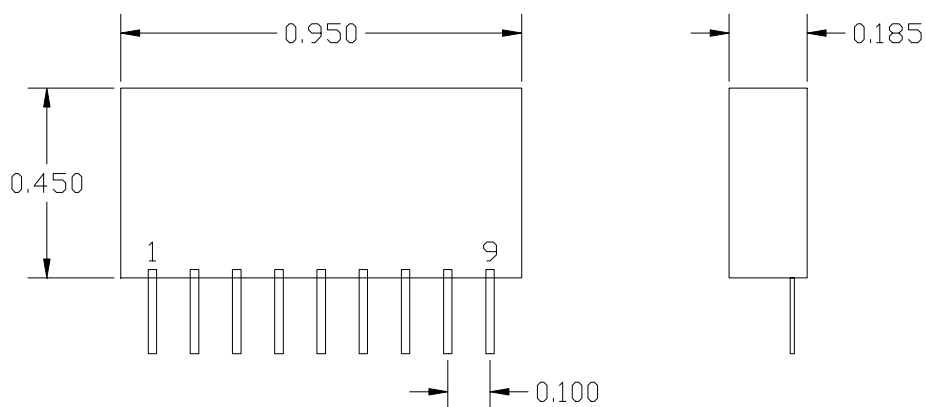

PIN 1 - INPUT
 PIN 9 - OUTPUT
 PIN 2 THRU 8 - GROUND
 UNIT IS UNENCAPSULATED - PARTS ARE EXPOSED

KR Electronics
 www.krfilters.com
 91 Avenel Street
 Avenel, NJ 07001
 732-636-1900