

BR805 THRU BR810

SINGLE-PHASE SILICON BRIDGE RECTIFIER

VOLTAGE RANGE 50 to 1000 Volts CURRENT 8.0 Amperes

Pb Free Product

FEATURES


- * Surge overload rating: 125 amperes peak
- * Low forward voltage drop
- * Mounting position: Any
- * Mounting: Hole thru for # 6 screw

MECHANICAL DATA

- * UL listed the recognized component directory, file #E195711
- * Epoxy: Device has UL flammability classification 94V-O

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

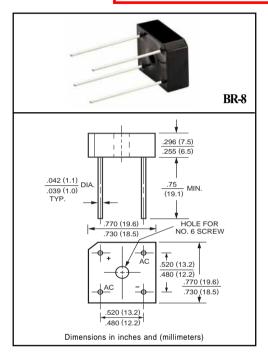

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)


RATINGS	SYMBOL	BR805	BR81	BR82	BR84	BR86	BR88	BR810	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Tc = 50°C		8.0							Amps
Rectified Output Current at: Tc = 100°C	lo	6.0							
$TA = 50^{\circ}C$		6.0							
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	125						Amps	
Operating Temperature Range	TJ	-55 to + 125							٥C
Storage Temperature Range	Тѕтс	-55 to + 150						۰C	

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS		SYMBOL	BR805	BR81	BR82	BR84	BR86	BR88	BR810	UNITS
Maximum Forward Voltage Drop per element a	t 4.0A DC	VF	1.1				Volts			
Maximum Reverse Current at Rated	@Ta = 25°C	In .	5							uAmps
DC Blocking Voltage per element	@Tc = 100°C	lR	0.2							mAmps

RATING AND CHARACTERISTIC CURVES (BR805 THRU BR810)

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT 250 PEAK FORWARD SURGE CURRENT, (A) 8.3ms Single Half Sine-Wave (JEDEC Method) 200 150 100 50 0 6 810 20 1 2 40 6080100 NUMBER OF CYCLES AT 60Hz



INSTANTANEOUS FORWARD VOLTAGE, (V)

FIG. 3- TYPICAL INSTANTANEOUS FORWARD

