## Nine Output 3.3V Buffer

#### Features


rev 0.2

- One-input to Nine-Output Buffer/Driver
- Supports two DIMMs or four SO-DIMMs with one additional output for feedback to an external or chipset PLL
- Low power consumption for mobile applications
- DataSheet4U.com Less than 32 mA at 66.6 MHz with unloaded outputs
  - 1nS Input-Output delay
  - Buffers all frequencies from DC to 133.33 MHz
  - Output-output skew less than 250pS
  - Multiple V<sub>DD</sub> and V<sub>SS</sub> pins for noise and electromagnetic interference (EMI) reduction
  - Space-saving 16-pin 150-mil SOIC Package
  - 3.3V operation
  - Commercial and Industrial temperature parts are available

### **Functional Description**

The ASM2P2309NZ is a low-cost buffer designed to distribute high-speed clocks in mobile PC systems and desktop PC systems with SDRAM support. The part has nine outputs, eight of which can be used to drive two DIMMs or four SO-DIMMs, and the remaining can be used for external feedback to a PLL. The device operates at 3.3V and outputs can run up to 133.33 MHz.


The ASM2P2309NZ is designed for low EMI and power optimization. It has multiple  $V_{SS}$  and  $V_{DD}$  pins for noise optimization and consumes less than 32 mA at 66.6 MHz, making it ideal for the low-power requirements of mobile systems. It is available in an ultra-compact 150-mil 16-pin SOIC package.

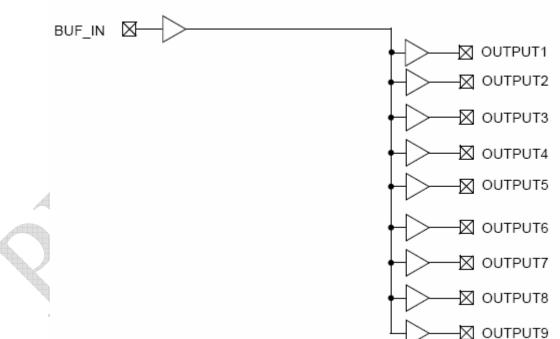

#### Block Diagram



## Pin Configuration for ASM2P2309NZ

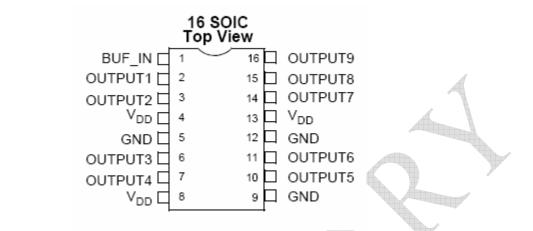

## Pin Description for ASM2P2309NZ

Pin	Signal	Description
4, 8, 13	V <sub>DD</sub>	3.3V Digital Voltage Supply
5, 9, 12	GND	Ground
1	BUF_IN	Input Clock
2, 3, 6, 7, 10, 11, 14, 15, 16	OUTPUT [1:9]	Outputs

The second s

## **Absolute Maximum Ratings**

Parameter	Min	Мах	Unit
Supply Voltage to Ground Potential	-0.5	7.0	V
DC Input Voltage (Except REF)	-0.5	V <sub>DD</sub> + 0.5	V
DC Input Voltage (REF)	-0.5	0.7	V
Storage Temperature	-65	+150	°C
Junction Temperature		150	°C
Static Discharge Voltage (As per JEDEC STD 22- A114-B)		>2000	V

Note: These are stress ratings only and functional usage is not implied. Exposure to absolute maximum ratings for prolonged periods can affect device reliability.

#### **Operating Conditions**

Parameter	Parameter Description		Max	Unit
V <sub>DD</sub>	Supply Voltage	3.0	3.6	V
т.	(Ambient Operating Temperature), Commercial	0	70	°C
T <sub>A</sub>	(Ambient Operating Temperature), Industrial	-40	85	°C
CL	Load Capacitance, Fout < 100 MHz	-	30	pF
	Load Capacitance,100 MHz < Fout < 133.33 MHz	-	15	pF
C <sub>IN</sub>	Input Capacitance	-	7	pF
BUF_IN, OUTPUT [1:9]	Operating Frequency	DC	133.33	MHz
t <sub>PU</sub> Power-up time for all V <sub>DD</sub> 's to reach minimum specified voltage (power ramps must be monotonic)		0.05	50	mS



June 2005

#### rev 0.2


#### **Electrical Characteristics for Commercial and Industrial Temperature Devices**


Parameter	Description	Test Conditions	Min.	Max.	Unit
V <sub>IL</sub>	Input LOW Voltage <sup>1</sup>		-	0.8	V
VIH	Input HIGH Voltage <sup>1</sup>		2.0	-	V
I <sub>IL</sub>	Input LOW Current	V <sub>IN</sub> = 0V	-	50.0	μA
I <sub>IH</sub>	Input HIGH Current	V <sub>IN</sub> = V <sub>DD</sub>	-	100.0	μA
V <sub>OL</sub>	Output LOW Voltage <sup>2</sup>	I <sub>OL</sub> = 8 mA	- /	0.4	V
ен40.con	Output HIGH Voltage <sup>2</sup>	I <sub>OH</sub> = -8 mA	2.4	-	V
I <sub>DD</sub>	Supply Current	Unloaded outputs at 66.66 MHz		32	mA

# Switching Characteristics for Commercial and Industrial Temperature Devices<sup>3</sup>

Parameter	Name	Description	Min.	Тур.	Max.	Unit
t <sub>D</sub>	Duty Cycle <sup>2</sup> = t <sub>2</sub> ÷t <sub>1</sub>	Measured at 1.4V	40.0	50.0	60.0	%
t <sub>3</sub>	Rise Time <sup>2</sup>	Measured between 0.8V and 2.0V			1.50	nS
t4	Fall Time <sup>2</sup>	Measured between 0.8V and 2.0V	Y-		1.50	nS
t <sub>5</sub>	Output to Output Skew <sup>2</sup>	All outputs equally loaded		-	250	pS
t <sub>6</sub>	Propagation Delay, BUF_IN Rising Edge to OUTPUT Rising Edge <sup>2</sup>	Measured at V <sub>DD</sub> /2	1	5	9.2	nS

Note: 1. BUF\_IN input has a threshold voltage of V<sub>DD</sub>/2. 2. Parameter is guaranteed by design and characterization. It is not 100% tested in production. 3. All parameters specified with loaded outputs.

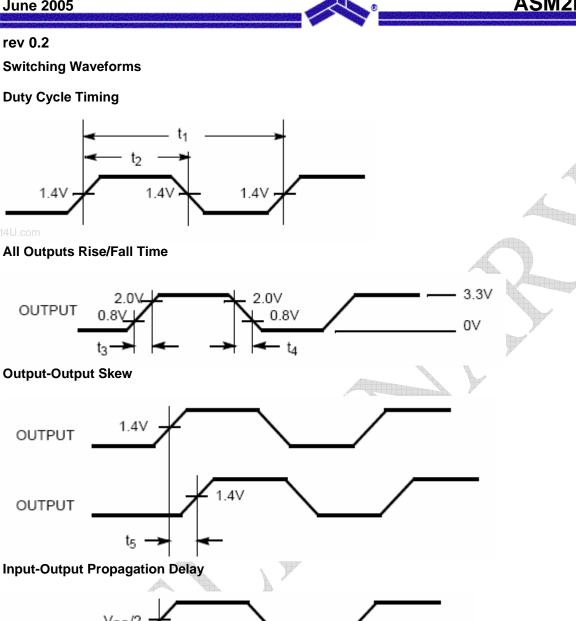

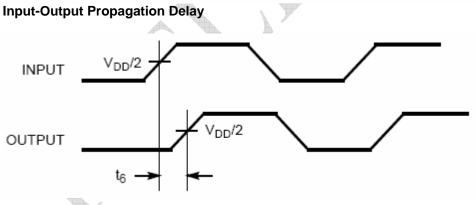

Nine Output 3.3V Buffer

www.DataSheet4U.com

Notice: The information in this document is subject to change without notice.


June 2005

# ASM2P2309NZ





## **Test Circuits**

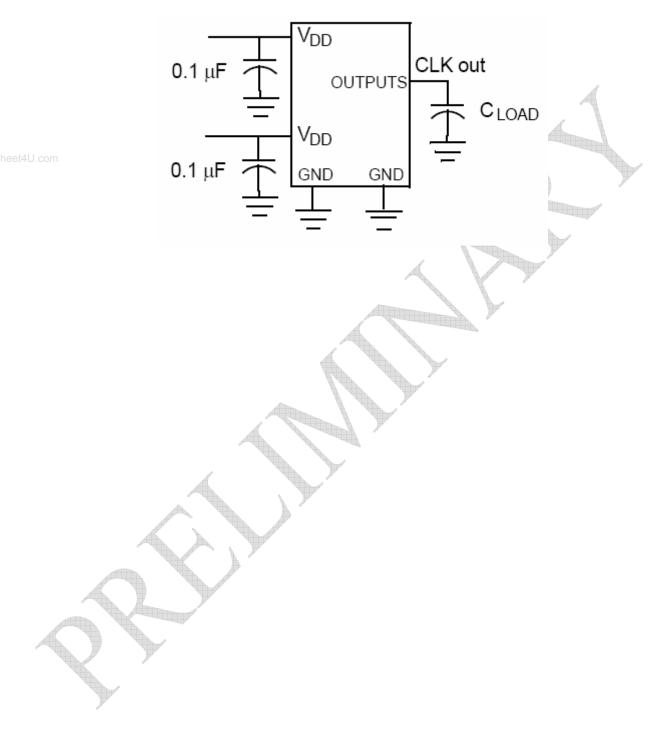




**Package Information** 

# 16-lead (150 Mil) Molded SOIC Package

ww.DataSheet4U.com

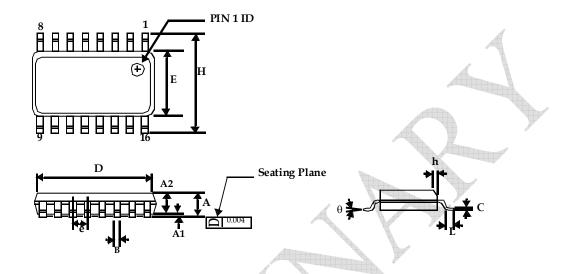

	Dimensions				
Symbol	Inches		Millim	neters	
	Min	Max	Min	Мах	
А	0.053	0.069	1.35	1.75	
A1	0.004	0.010	0.10	0.25	
A2	0.049	0.059	1.25	1.50	
В	0.013	0.022	0.33	0.53	
С	0.008	0.012	0.19	0.27	
D	0.386	0.394	9.80	10.01	
E	0.150	0.157	3.80	4.00	
е	0.050 BSC		1.27 BSC		
H	0.228	0.244	5.80	6.20	
h	0.010	0.016	0.25	0.41	
	0.016	0.035	0.40	0.89	
θ	0°	8°	0°	8°	


#### June 2005

#### rev 0.2

**Ordering Codes** 

Part Number	Marking	Package Type	Operating Range
ASM5P2309NZF-08-ST	5P2309NZF	16-pin 150-mil SOIC, Pb Free	Commercial
ASM5P2309NZF-08-SR	5P2309NZF	16-pin 150-mil SOIC, Tape and Reel, Pb Free	Commercial
ASM5I2309NZF-08-ST	5I2309NZF	16-pin 150-mil SOIC, Pb Free	Industrial
ASM5I2309NZF-08-SR	5I2309NZF	16-pin 150-mil SOIC, Tape and Reel, Pb Free	Industrial
ASM5P2309NZG-08-ST	5P2309NZG	16-pin 150-mil SOIC, Green	Commercial
ASM5P2309NZG-08-SR	5P2309NZG	16-pin 150-mil SOIC, Tape and Reel, Green	Commercial
ASM5I2309NZG-08-ST	5I2309NZG	16-pin 150-mil SOIC, Green	Industrial
ASM5I2309NZG-08-SR	5I2309NZG	16-pin 150-mil SOIC ,Tape and Reel, Green	Industrial

#### **Device Ordering Information**

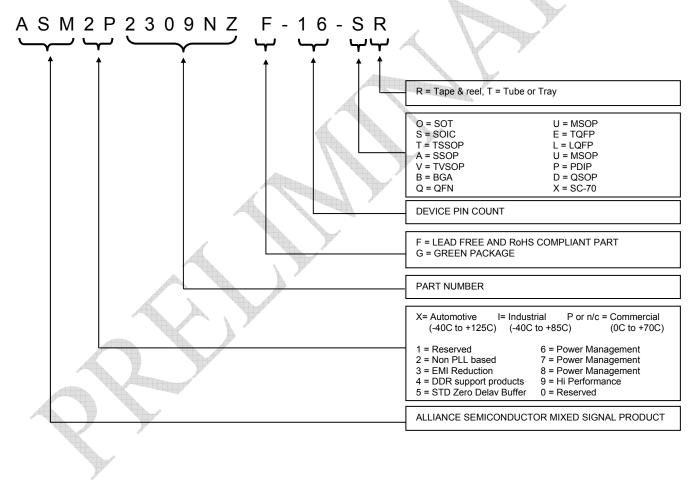

Licensed under US patent #5,488,627, #6,646,463 and #5,631,920.

ww.DataSheet4U.com



Alliance Semiconductor Corporation 2575, Augustine Drive, Santa Clara, CA 95054 Tel# 408-855-4900 Fax: 408-855-4999 www.alsc.com Copyright © Alliance Semiconductor All Rights Reserved Part Number: ASM2P2309NZ Document Version: 0.2

Note: This product utilizes US Patent # 6,646,463 Impedance Emulator Patent issued to Alliance Semiconductor, dated 11-11-2003

© Copyright 2003 Alliance Semiconductor Corporation. All rights reserved. Our three-point logo, our name and Intelliwatt are trademarks or registered trademarks of Alliance. All other brand and product names may be the trademarks of their respective companies. Alliance reserves the right to make changes to this document and its products at any time without notice. Alliance assumes no responsibility for any errors that may appear in this document. The data contained herein represents Alliance's best data and/or estimates at the time of issuance. Alliance reserves the right to change or correct this data at any time, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information in this product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide, any guarantee or warrantee to any user or customer. Alliance does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of Alliance products including liability or warranties related to fitness for a particular purpose, merchantability, or infringement of any intellectual property rights, except as express agreed to in Alliance's Terms and Conditions of Sale (which are available from Alliance). All sales of Alliance products are made exclusively according to Alliance's Terms and Conditions of Sale. The purchase of products from Alliance does not convey a license under any patent rights, copyrights; mask works rights, trademarks, or any other intellectual property rights of Alliance or third parties. Alliance does not authorize its products for use as critical components in life-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of Alliance products in such life-supporting systems implies that the manufacturer assumes all risk of such use and agrees to indemnify Alliance against all claims arising from such use.